

**Y-Distributor M12 male / MSUD valve plug A-18mm**

PUR 3x0.75 ye UL/CSA 0.6m

Y connector

Plastic housings with good resistance against chemicals and oils.

Further cable lengths on request.

Male straight – male 90°

M12, 4-pole

A-coded

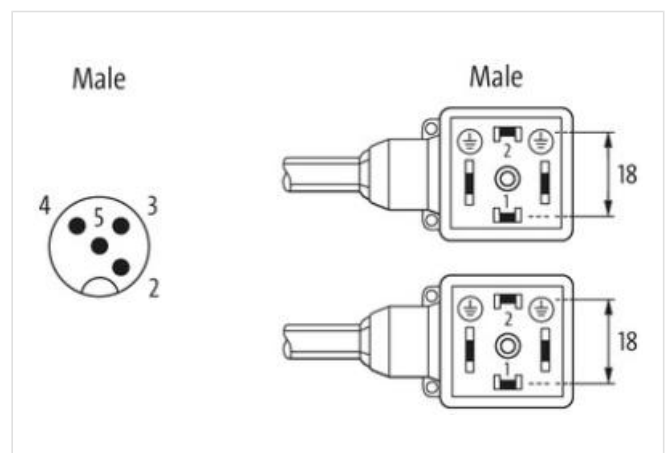
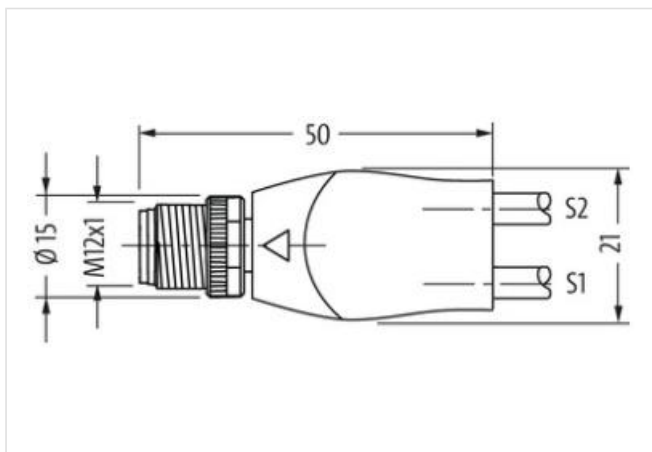
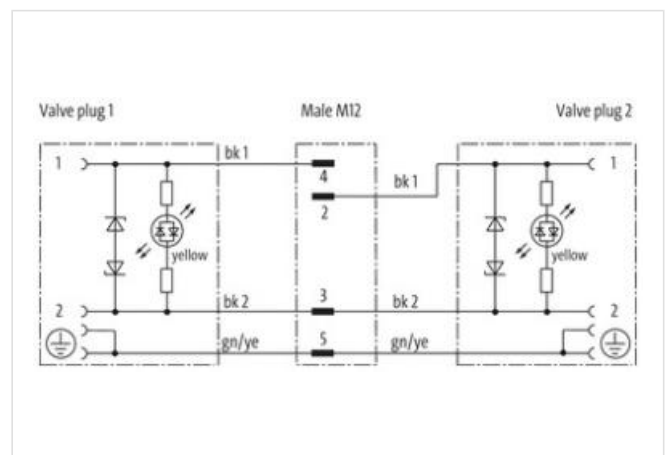
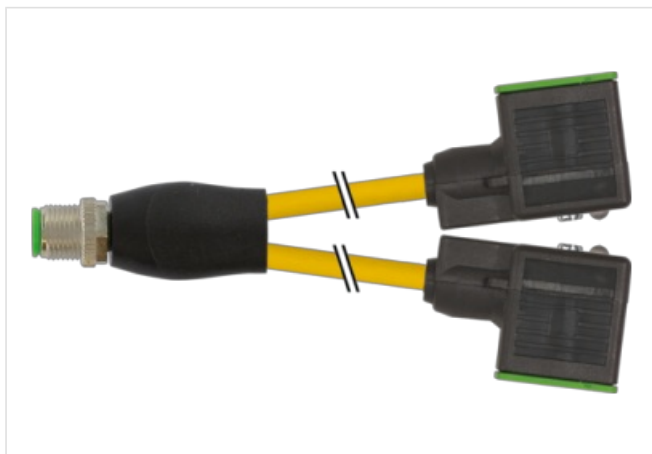
MSUD

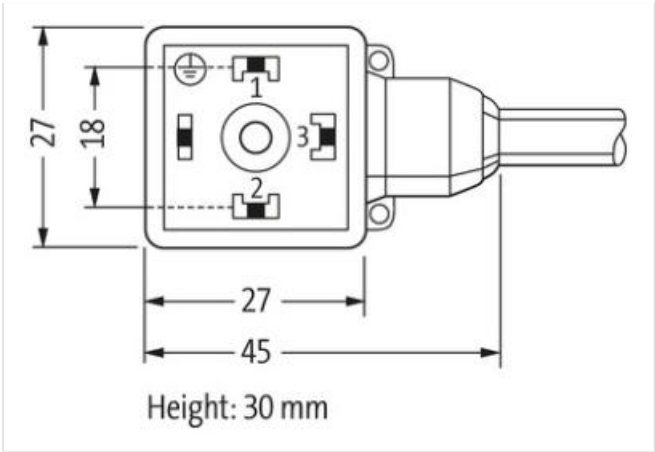
Form A (18 mm)

LED (yellow)

Diode/Z-Diode

Art-No. 7005 - M12 Lite - (plastic hexagonal screw) on request

[Link naar het product](#)**Afbeelding**



Product van afwijken van afbeelding



|                          |                   |
|--------------------------|-------------------|
| Cable length             | 0,6 m             |
| Side 1                   |                   |
| Tightening torque        | 0,4 Nm            |
| Mounting method          | inserted, screwed |
| Coating contact          | gold plated       |
| Family construction form | M12               |
| Thread                   | M3                |
| Material contact         | Copper alloy      |
| Material                 | PUR               |
| No. of poles             | 4                 |
| Width across flats       | SW13              |
| Side 2                   |                   |
| Tightening torque        | 0,6 Nm            |
| Mounting method          | inserted, screwed |
| Coating contact          | silver-plated     |
| Family construction form | MSUD              |
| Thread                   | M12 x 1           |
| Material                 | PBT               |
| No. of poles             | 4                 |
| Side 3                   |                   |
| Mounting method          | inserted, screwed |
| Family construction form | MSUD              |
| No. of poles             | 4                 |
| Commerciële gegevens     |                   |
| ECLASS-6.0               | 27143423          |
| ECLASS-6.1               | 27279218          |
| ECLASS-7.0               | 27279218          |
| ECLASS-8.0               | 27279218          |
| ECLASS-9.0               | 27060312          |
| ECLASS-10.1              | 27060312          |
| ECLASS-11.1              | 27060312          |
| ECLASS-12.0              | 27060312          |

|                                                 |                                                                                                                                                       |
|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| ETIM-5.0                                        | EC001855                                                                                                                                              |
| Douane tarief nummer                            | 85444290                                                                                                                                              |
| GTIN                                            | 4048879614122                                                                                                                                         |
| Verpakkingseenheid                              | 1                                                                                                                                                     |
| <b>Electrical data   Supply</b>                 |                                                                                                                                                       |
| Operating voltage AC                            | 24 V                                                                                                                                                  |
| Operating voltage AC min.                       | 19,2 V                                                                                                                                                |
| Operating voltage AC max.                       | 28,8 V                                                                                                                                                |
| Operating voltage DC                            | 24 V                                                                                                                                                  |
| Operating voltage DC min.                       | 18 V                                                                                                                                                  |
| Operating voltage DC max.                       | 30 V                                                                                                                                                  |
| Cut-off peak voltage max.                       | 55 V                                                                                                                                                  |
| Current operating per contact max.              | 4 A                                                                                                                                                   |
| Current consumption max.                        | 15 mA                                                                                                                                                 |
| <b>Diagnostics</b>                              |                                                                                                                                                       |
| Status indication LED                           | yellow                                                                                                                                                |
| <b>Device protection   Electrical</b>           |                                                                                                                                                       |
| Degree of protection (EN IEC 60529)             | IP67                                                                                                                                                  |
| Additional condition protection degree          | inserted, screwed                                                                                                                                     |
| Pollution Degree                                | 3                                                                                                                                                     |
| Rated surge voltage                             | 0,8 kV                                                                                                                                                |
| Material group (IEC 60664-1)                    | I                                                                                                                                                     |
| Additional suppressor                           | Diode, Z-Diode                                                                                                                                        |
| <b>Mechanical data</b>                          |                                                                                                                                                       |
| Contour for corrugated hose                     | without                                                                                                                                               |
| <b>Mechanical data   Material data</b>          |                                                                                                                                                       |
| Coating locking                                 | Nickeled                                                                                                                                              |
| Material gasket                                 | PUR                                                                                                                                                   |
| Locking material                                | Zinc die-casting                                                                                                                                      |
| <b>Mechanical data   Mounting data</b>          |                                                                                                                                                       |
| Mounting method                                 | inserted, screwed                                                                                                                                     |
| <b>Environmental characteristics   Climatic</b> |                                                                                                                                                       |
| Operating temperature min.                      | -25 °C                                                                                                                                                |
| Operating temperature max.                      | 85 °C                                                                                                                                                 |
| Additional condition temperature range          | depending on cable quality                                                                                                                            |
| <b>Important installation notes</b>             |                                                                                                                                                       |
| Note on strain relief                           | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius                          | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |
| <b>Conformity</b>                               |                                                                                                                                                       |
| Product standard                                | DIN EN 61076-2-101 (M12)                                                                                                                              |
| <b>Installation   Cable</b>                     |                                                                                                                                                       |
| wire arrangement                                | black 1, black 2, green-yellow                                                                                                                        |
| Cable identification                            | 026                                                                                                                                                   |
| Cable Type                                      | 2                                                                                                                                                     |
| Printing color of wire insulation               | white (isolation black)                                                                                                                               |
| Jacket Color                                    | yellow                                                                                                                                                |
| Type of Certificate                             | cURus                                                                                                                                                 |
| Amount stranding                                | 1                                                                                                                                                     |
| Stranding                                       | 3 wires twisted                                                                                                                                       |
| wire arrangement                                | black 1, black 2, green-yellow                                                                                                                        |

|                                          |                                                  |
|------------------------------------------|--------------------------------------------------|
| Cable weight                             | 55 g/m                                           |
| Material jacket                          | PUR                                              |
| Shore hardness jacket                    | 85 ± 5 Shore A                                   |
| Freedom from ingredients (jacket)        | lead-free, cadmium-free, CFC-free, silicone-free |
| Outer-diameter (jacket)                  | 5,9 mm                                           |
| Tolerance outer diameter (sheath)        | ± 5 %                                            |
| Material inner jacket                    | PVC                                              |
| Color (inner jacket)                     | yellow                                           |
| Material wire insulation                 | PVC                                              |
| Amount wires                             | 3                                                |
| Outer diameter insulation                | 1,8 mm                                           |
| Outer diameter tolerance core insulation | ± 5 %                                            |
| Shore hardness wire insulation           | 43 ± 5 Shore D                                   |
| Ingredient freeness wire insulation      | lead-free, cadmium-free, CFC-free, silicone-free |
| Printing color of wire insulation        | white (isolation black)                          |
| Amount strands (wire)                    | 42                                               |
| Diameter of single wires                 | 0,15 mm                                          |
| Conductor crosssection (wire)            | 0,75 mm²                                         |
| Material conductor wire                  | Stranded copper wire, bare                       |
| Conductor type (wire)                    | strand class 6                                   |
| Nominal voltage AC max.                  | 300 V                                            |
| Current load capacity (standard)         | to DIN VDE 0298-4                                |
| Current load capacity min. wire          | 9,6 A                                            |
| Electrical resistance line constant wire | 26 Ω/km @ 20 °C                                  |
| Min. operating temperature (static)      | -30 °C                                           |
| Max. operating temperature (fixed)       | 80 °C                                            |
| Operating temperature min. (dynamic)     | -5 °C                                            |
| Operating temperature max. (dynamic)     | 80 °C                                            |
| chemical resistance                      | Good, application-related testing                |
| Gasoline resistance                      | Good, application-related testing                |
| Oil resistance                           | DIN EN 60811-404                                 |
| Bending radius (fixed)                   | 10 x Outer diameter                              |
| Bending radius (dynamic)                 | 15 x Outer diameter                              |
| No. of bending cycles (C-track)          | 2 Mio. @ 25 °C                                   |
| Traversing distance (C-track)            | 5 m @ 25 °C   horizontal                         |
| Travel speed (C-track)                   | 3,3 m/s @ 25 °C                                  |