

MOTOR SUPPRESSOR

Varistor, 3x400VAC/7,5kW



3× 400 V AC

VDR

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

Link naar het product

Afbeelding

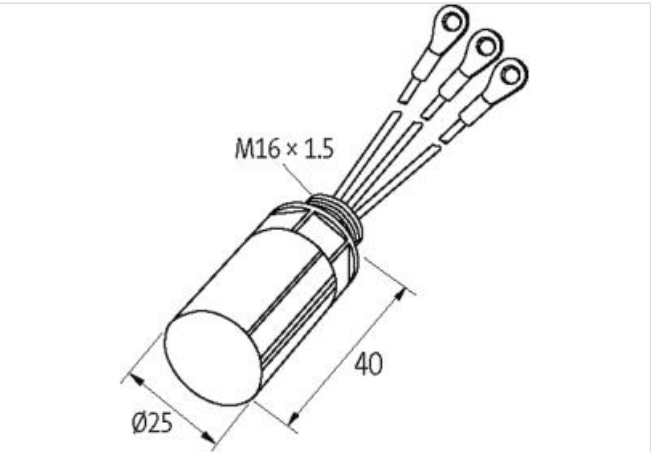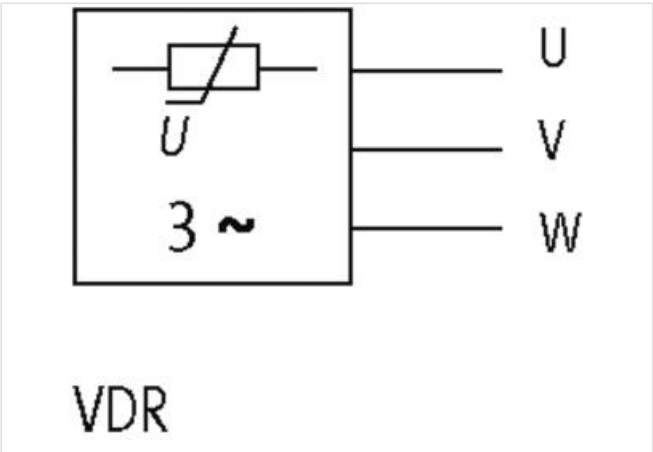

Product van afwijken van afbeelding



| Commerciële gegevens |          |
|----------------------|----------|
| ECLASS-6.0           | 27371013 |
| ECLASS-6.1           | 27371013 |
| ECLASS-7.0           | 27371013 |
| ECLASS-8.0           | 27371013 |
| ECLASS-9.0           | 27371013 |
| ECLASS-10.1          | 27371013 |

|                      |               |
|----------------------|---------------|
| ECLASS-11.1          | 27371013      |
| ECLASS-12.0          | 27371013      |
| ETIM-5.0             | EC000197      |
| Douane tarief nummer | 85363010      |
| GTIN                 | 4048879018920 |
| Verpakkingseenheid   | 1             |

**Electrical data | Input**

|                  |       |
|------------------|-------|
| Input voltage AC | 400 V |
|------------------|-------|

**Installation**

|                               |                     |
|-------------------------------|---------------------|
| Connection cross section max. | 0,5 mm <sup>2</sup> |
|-------------------------------|---------------------|

**Installation | Connection**

|                        |                |
|------------------------|----------------|
| Connection information | Single strands |
| Length single strands  | 100 mm         |
| Ring terminals         | M6isolated     |

**Device protection | Media**

|                  |                 |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

**Mechanical data | Material data**

|                                     |                   |
|-------------------------------------|-------------------|
| Combustibility class housing (UL94) | V-0               |
| Material housing                    | Plastic           |
| Material potting compound           | 2-component epoxy |

**Mechanical data | Mounting data**

|                            |                  |
|----------------------------|------------------|
| Mounting method            | inserted         |
| Suitable for mounting type | Motorklemmkasten |
| Height                     | 25 mm            |
| Width                      | 25 mm            |
| Depth                      | 40 mm            |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 60 °C  |