



SUPPRESSOR FOR CONTACTORS

VDR-diode, 220 VDC, 25 W

24...240 V DC
VDR + Diode
DIN-rail mountable (EN 60715)
For other configurations and voltages, please inquire.

[Link naar het product](#)

Afbeelding

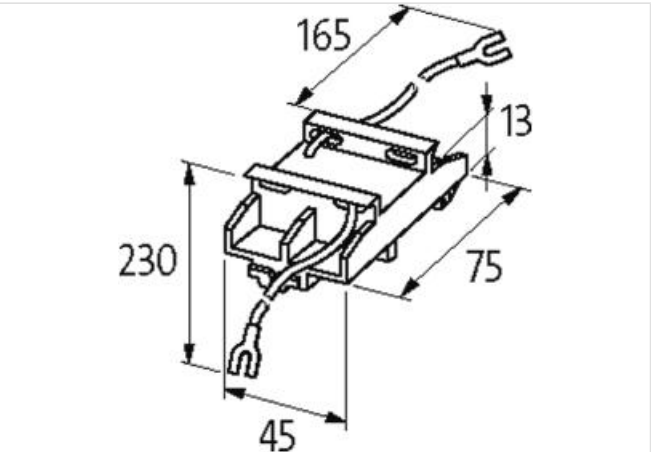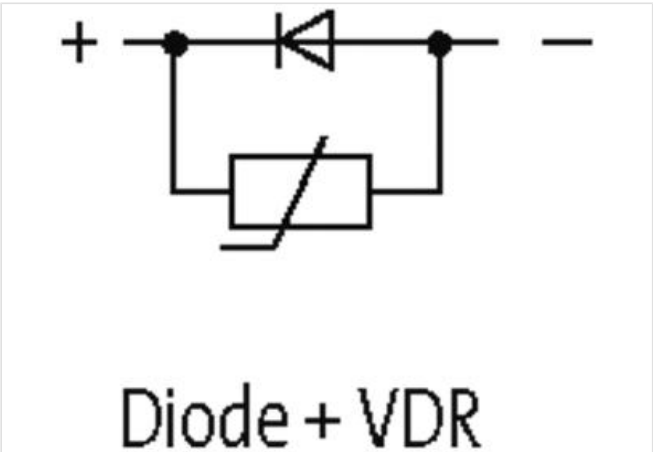

Product van afwijken van afbeelding



Commerciële gegevens	
ECLASS-6.0	27371013
ECLASS-6.1	27371013
ECLASS-7.0	27371013
ECLASS-8.0	27371013
ECLASS-9.0	27371013
ECLASS-10.1	27371013

ECLASS-11.1	27371013
ECLASS-12.0	27371013
ETIM-5.0	EC002498
Douane tarief nummer	85363010
GTIN	4048879018319
Verpakkingseenheid	1

Compatibility | Compatible with

Appropriate contactors	universal
------------------------	-----------

Electrical data

Damping factor	1.5× UN
Holding power max.	25 W

Electrical data | Input

Input voltage DC min.	24 V
Input voltage DC max.	240 V

Installation | Connection

Connection information	self-securing cable forks
------------------------	---------------------------

Device protection | Media

Flame resistance	flame retardant
------------------	-----------------

Mechanical data | Material data

Combustibility class housing (UL94)	V-0
Material housing	Plastic

Mechanical data | Mounting data

Mounting method	geschnappt
Suitable for mounting type	mounting rail, (EN 60715)
Height	75 mm
Width	45 mm
Depth	13 mm

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	70 °C