

**MOTOR SUPPRESSOR**

RC, 3x400VAC/10kW

3× 400 V AC



RC

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

For DIN-rail mounting use 2×Art.-No. 20900 adapter feet  
approx. 500 mm, PVC cable 3× 0.75 mm²

**Link to Product**

**Illustration**

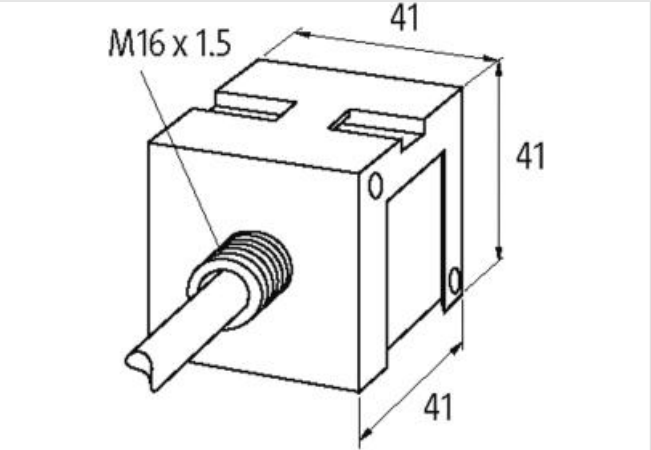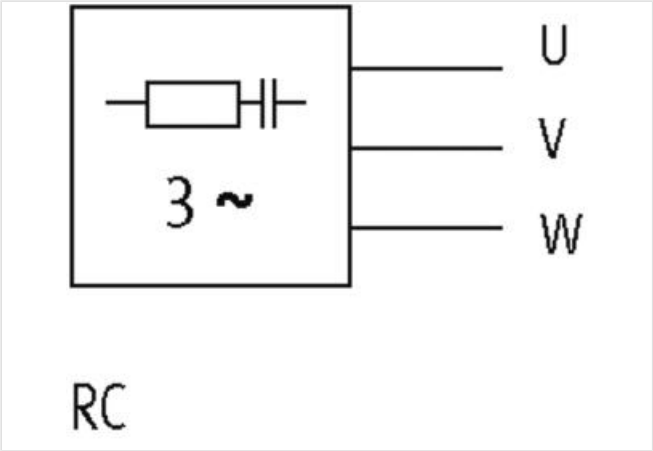

Product may differ from Image



| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27371013 |
| ECLASS-6.1      | 27371013 |
| ECLASS-7.0      | 27371013 |
| ECLASS-8.0      | 27371013 |

|                       |               |
|-----------------------|---------------|
| ECLASS-9.0            | 27371013      |
| ECLASS-10.1           | 27371013      |
| ECLASS-11.1           | 27371013      |
| ECLASS-12.0           | 27371013      |
| ETIM-5.0              | EC000197      |
| customs tariff number | 85363010      |
| GTIN                  | 4048879019569 |
| Packaging unit        | 1             |

**Electrical data | Supply**

|                 |              |
|-----------------|--------------|
| Power frequency | 50 ... 60 Hz |
|-----------------|--------------|

**Electrical data | Input**

|                  |       |
|------------------|-------|
| Input voltage AC | 400 V |
|------------------|-------|

**Installation**

|                               |          |
|-------------------------------|----------|
| Connection cross section max. | 0,75 mm² |
|-------------------------------|----------|

**Installation | Connection**

|                          |                |
|--------------------------|----------------|
| Family construction form | free cable end |
|--------------------------|----------------|

**Installation | Pin assignment**

|              |   |
|--------------|---|
| No. of poles | 3 |
|--------------|---|

**Device protection | Media**

|                  |                 |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

**Mechanical data | Material data**

|                                     |                   |
|-------------------------------------|-------------------|
| Combustibility class housing (UL94) | V-0               |
| Material housing                    | Plastic           |
| Material potting compound           | 2-component epoxy |

**Mechanical data | Mounting data**

|                            |                                |
|----------------------------|--------------------------------|
| Mounting method            | geschnappt                     |
| Suitable for mounting type | Mounting rail TH35, (EN 60715) |
| Height                     | 41 mm                          |
| Width                      | 41 mm                          |
| Depth                      | 41 mm                          |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 60 °C  |