



POWER DISTRIBUTOR PD4 7/8" 5 POLE

24+E male to 4 x 7/8" 5-pole female

Industry male plug 24+PE
to 4x 7/8" UNF female
5-pole

[Link to Product](#)

Illustration

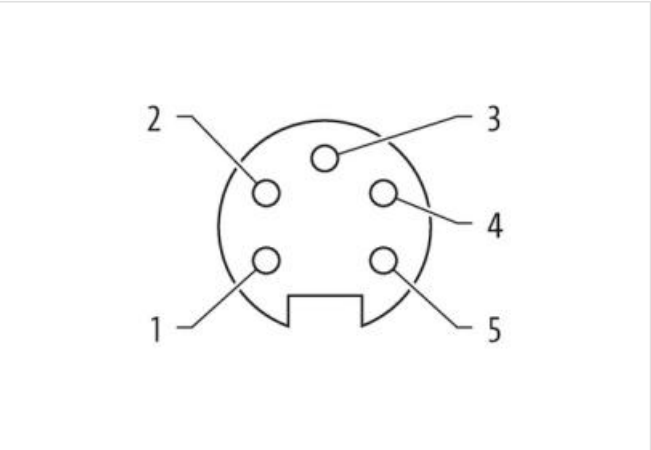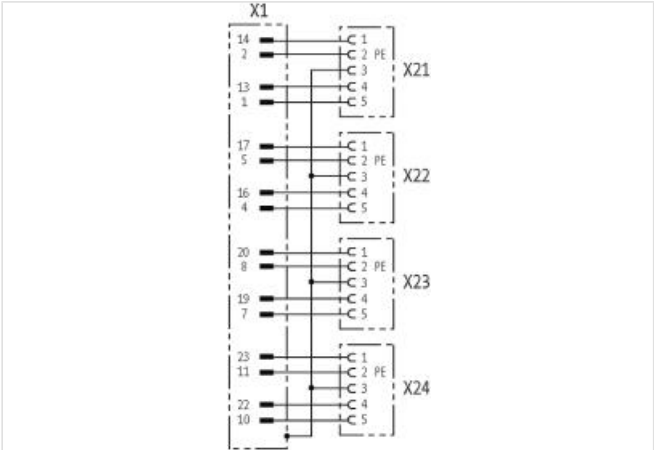

Product may differ from Image



| Commercial data | |
|-----------------|----------|
| ECLASS-6.0 | 27279219 |
| ECLASS-6.1 | 27142601 |
| ECLASS-7.0 | 27142601 |
| ECLASS-8.0 | 27142601 |
| ECLASS-9.0 | 27142601 |
| ECLASS-10.1 | 27142601 |

| | |
|---|--------------------------|
| ECLASS-11.1 | 27142606 |
| ECLASS-12.0 | 27142606 |
| ETIM-5.0 | EC002585 |
| customs tariff number | 85369010 |
| GTIN | 4048879063449 |
| Packaging unit | 1 |
| Electrical data | |
| Security level | SELV |
| Electrical data Supply | |
| Operating voltage AC | 50 V |
| Operating voltage DC | 120 V |
| Current operating per contact max. | 9 A |
| Device protection Electrical | |
| Degree of protection (EN IEC 60529) | IP67 |
| Additional condition protection degree | inserted, screwed |
| Mechanical data Material data | |
| Coating housing | powder-coated |
| Material housing | Aluminum die casting |
| Mechanical data Mounting data | |
| Height | 165 mm |
| Width | 70 mm |
| Depth | 100 mm |
| Looking techniques | 2-hand fixing (2 clamps) |
| Environmental characteristics Climatic | |
| Operating temperature min. | -30 °C |
| Operating temperature max. | 85 °C |