

**Product discontinued until 31.10.2018, replaced by: 56469**

Gateway Ethernet-IP/AS-i, 1 Master, Spec. 3.0, IP20

Gateway-Singlemaster

via pluggable spring clamp plug-in terminals on the front 0.5...1.5 mm<sup>2</sup>

AS-Interface/EtherNet/IP

Specification 3.0

Current manuals, GSD/type data can be downloaded at: [www.murrelektronik.com](http://www.murrelektronik.com)


Other gateways on request.

## Link to Product

### Illustration



Product may differ from Image

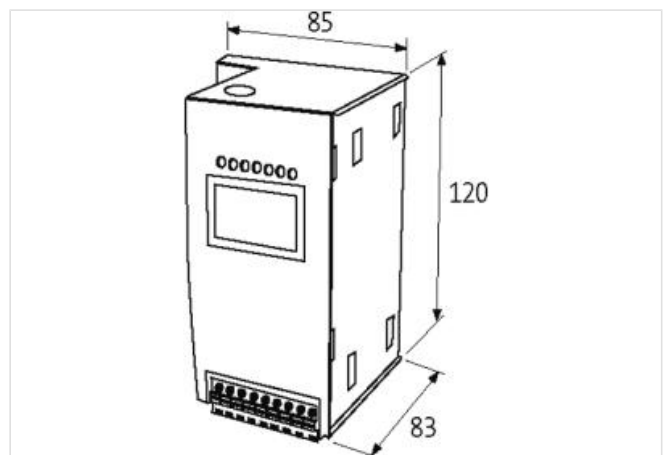

### Commercial data

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27242208      |
| ECLASS-7.0            | 27242208      |
| ECLASS-8.0            | 27242208      |
| ECLASS-9.0            | 27242208      |
| ETIM-5.0              | EC001604      |
| customs tariff number | 85176200      |
| GTIN                  | 4048879495707 |
| Packaging unit        | 1             |

### Electrical data

|                                           |        |
|-------------------------------------------|--------|
| Rated operating current AS-Interface max. | 200 mA |
|-------------------------------------------|--------|

### Electrical data | Supply

|                      |      |
|----------------------|------|
| Operating voltage DC | 30 V |
|----------------------|------|

### Industrial communication

|                    |             |
|--------------------|-------------|
| Supported protocol | EtherNet/IP |
|--------------------|-------------|

### Industrial communication | AS-Interface

|                             |                            |
|-----------------------------|----------------------------|
| AS-i specification          | V3.0                       |
| Number of slaves max.       | 62                         |
| Diagnostic interface serial | RJ45/Fieldbus or PS2/RS232 |

The information in this Product-PDF has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-05

Murrelektronik bv | Noorderlaan 147-b9 | B-2030 Antwerpen | Fon +32 (0)380 868 81 | Fax | [shop@murrelektronik.be](mailto:shop@murrelektronik.be) | [shop.murrelektronik.be](http://shop.murrelektronik.be)

Cycle time AS-i 150  $\mu$ s  $\times$  (number of slaves + 2)

**Installation | Connection**

Family construction form RJ45

**Device protection | Electrical**

Degree of protection (EN IEC 60529) IP20

Rated insulation voltage 500 V

**Mechanical data | Mounting data**

Mounting method geschnappt

Suitable for mounting type mounting rail, (EN 60715)

Height 120 mm

Width 85 mm

Depth 83 mm

**Environmental characteristics | Climatic**

Operating temperature min. 0 °C

Operating temperature max. 55 °C

Storage temperature min. -25 °C

Storage temperature max. 85 °C

**Conformity**

Low Voltage Directive EN 50295