

HYBRID FIELD-BUS COUPLERS

Conversion electrical-electrical (passive)


CU, CU (female/female)  
Han-Brid ® a registered trademark of HARTING KGaA.

Link to Product

Illustration



Product may differ from Image

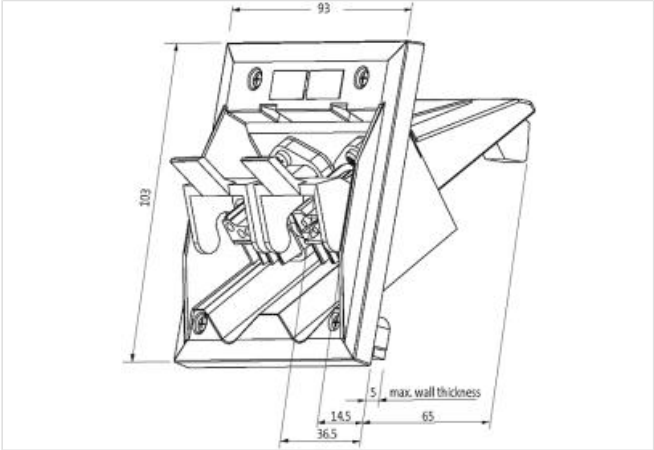

| Commercial data                                      |                                |
|------------------------------------------------------|--------------------------------|
| ECLASS-6.0                                           | 27189217                       |
| ECLASS-7.0                                           | 27189217                       |
| ECLASS-8.0                                           | 27189217                       |
| ECLASS-9.0                                           | 27189217                       |
| ETIM-5.0                                             | EC002641                       |
| customs tariff number                                | 85366990                       |
| GTIN                                                 | 4048879041492                  |
| Packaging unit                                       | 1                              |
| Electrical data   Supply                             |                                |
| Operating voltage DC                                 | 24 V                           |
| Industrial communication                             |                                |
| Data transmission rate max.                          | 12 MBit/s                      |
| Installation                                         |                                |
| Connection cross-section solid max.                  | 0,25 mm²                       |
| Connection cross-section stranded/fine-stranded max. | 2,5 mm²                        |
| Installation   Connection                            |                                |
| Connection                                           | Spring clamp plug-in terminals |
| Device protection                                    |                                |
| Shielded                                             | no                             |
| Device protection   Media                            |                                |

Flame resistance flame retardant

**Mechanical data | Material data**

|                  |         |
|------------------|---------|
| Color housing    | black   |
| Material housing | Plastic |

**Mechanical data | Mounting data**

|               |        |
|---------------|--------|
| Height cutout | 90 mm  |
| Width cutout  | 80 mm  |
| Height        | 103 mm |
| Width         | 93 mm  |
| Depth         | 65 mm  |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 50 °C  |