



MKN POWER SUPPLY 1-PHASE, LINEAR REGULATED

IN: 230VAC OUT: 10V/0,08ADC

INPUT: 230 V AC  
OUTPUT: 10 V DC  
Current: 80 mA  
This power supply units meet the (EN 61000-3-2) standard for harmonic current.  
Condensation not permitted

Link to Product

Illustration

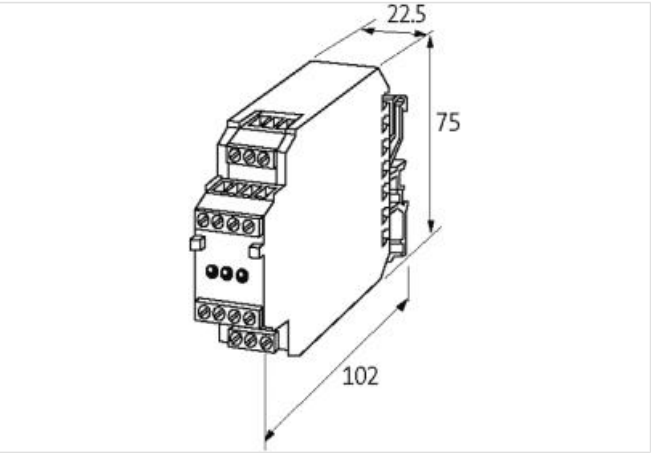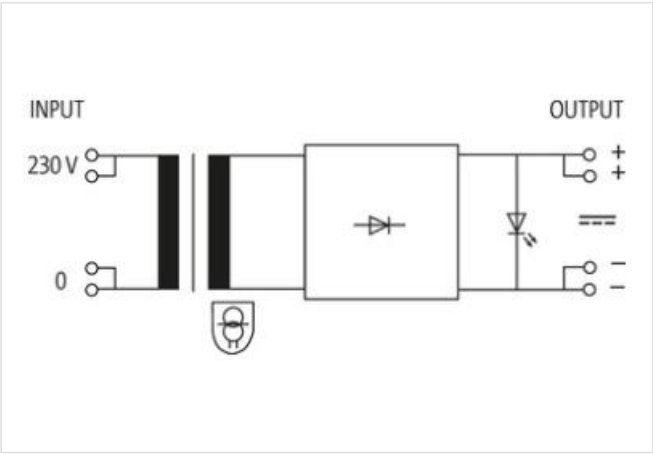

Product may differ from Image



| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27049002 |
| ECLASS-6.1      | 27049002 |
| ECLASS-7.0      | 27049002 |
| ECLASS-8.0      | 27049002 |
| ECLASS-9.0      | 27040701 |

|                       |               |
|-----------------------|---------------|
| ECLASS-10.1           | 27040701      |
| ECLASS-11.1           | 27040701      |
| ECLASS-12.0           | 27040701      |
| ETIM-5.0              | EC002540      |
| customs tariff number | 85044095      |
| GTIN                  | 4048879079655 |
| Packaging unit        | 1             |

**Electrical data | Supply**

|                 |              |
|-----------------|--------------|
| Power frequency | 50 ... 60 Hz |
|-----------------|--------------|

**Electrical data | Input**

|                                      |         |
|--------------------------------------|---------|
| Characteristic back-up fuse          | Inertia |
| Input voltage AC min.                | 207 V   |
| Input voltage AC max.                | 253 V   |
| Input current                        | 20 mA   |
| External back-up fuse per phase max. | 0,063 A |

**Electrical data | Output**

|                     |                          |
|---------------------|--------------------------|
| Output suppression  | Screening capacitor, VDR |
| Output current max. | 0,08 A                   |
| Ripple (s-s) max.   | 10 mV                    |

**Device protection | Electrical**

|                                 |     |
|---------------------------------|-----|
| Overload protection output      | yes |
| Short-circuit protection output | yes |

**Mechanical data | Mounting data**

|                            |                                     |
|----------------------------|-------------------------------------|
| Mounting method            | geschnappt                          |
| Suitable for mounting type | Mounting rail TH35, G32, (EN 60715) |

**Environmental characteristics | Climatic**

|                            |       |
|----------------------------|-------|
| Operating temperature min. | 0 °C  |
| Operating temperature max. | 60 °C |