


MIRO 6.2 MULTI-TIMER TRANSISTOR FK

IN: 30 VDC - OUT: 30 VDC / 0.1 A

Transistor output  
Impulse expansion: 10 ms...100 s  
Spring clamp terminals

[Link to Product](#)

Illustration

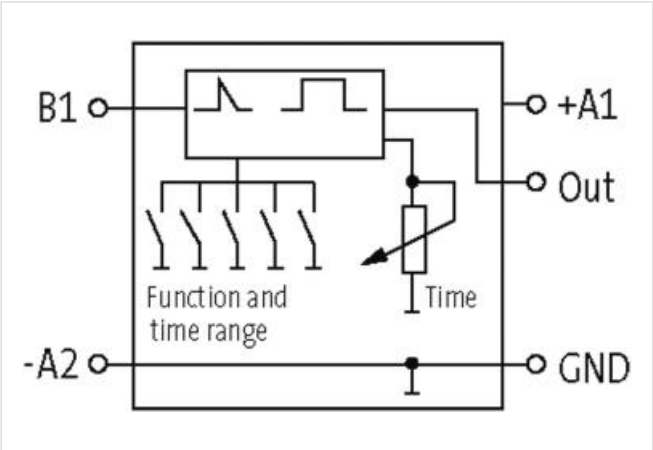

Product may differ from Image



| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27210990 |
| ECLASS-6.1      | 27371790 |
| ECLASS-7.0      | 27371790 |
| ECLASS-8.0      | 27371605 |
| ECLASS-9.0      | 27371605 |
| ECLASS-10.1     | 27371605 |

|                                                 |                           |
|-------------------------------------------------|---------------------------|
| ECLASS-11.1                                     | 27371605                  |
| ECLASS-12.0                                     | 27371605                  |
| ETIM-5.0                                        | EC001439                  |
| customs tariff number                           | 85364900                  |
| GTIN                                            | 4048879021234             |
| Packaging unit                                  | 1                         |
| <b>Electrical data   Input</b>                  |                           |
| Input voltage DC min.                           | 18 V                      |
| Input voltage DC max.                           | 30 V                      |
| Control voltage DC min.                         | 18 V                      |
| Control voltage DC max.                         | 30 V                      |
| <b>Electrical data   Output</b>                 |                           |
| Switching frequency max.                        | 50 Hz                     |
| Switching voltage DC                            | 24 V                      |
| Switching current DC                            | 1 mA                      |
| Switching current max.                          | 100 mA                    |
| <b>Device protection   Electrical</b>           |                           |
| Short-circuit protected                         | yes                       |
| <b>Mechanical data   Mounting data</b>          |                           |
| Mounting method                                 | geschnappt                |
| Suitable for mounting type                      | mounting rail, (EN 60715) |
| Height                                          | 91 mm                     |
| Width                                           | 6,2 mm                    |
| Depth                                           | 70 mm                     |
| <b>Environmental characteristics   Climatic</b> |                           |
| Operating temperature min.                      | -20 °C                    |
| Operating temperature max.                      | 60 °C                     |
| <b>Connection type 5</b>                        |                           |
| Connection                                      | Spring clamp terminals FK |
| Family construction form                        | terminal                  |
| Gender                                          | female                    |
| Color contact carrier                           | black                     |
| No. of poles                                    | 1                         |
| PIN 1                                           | + A 1                     |
| Connection                                      | Spring clamp terminals FK |
| Family construction form                        | terminal                  |
| Gender                                          | female                    |
| Color contact carrier                           | black                     |
| No. of poles                                    | 1                         |
| PIN 1                                           | 0 V                       |
| Connection                                      | Spring clamp terminals FK |
| Family construction form                        | terminal                  |
| Gender                                          | female                    |
| Color contact carrier                           | black                     |
| No. of poles                                    | 1                         |
| PIN 1                                           | Out                       |
| Connection                                      | Spring clamp terminals FK |
| Family construction form                        | terminal                  |
| Gender                                          | female                    |
| Color contact carrier                           | black                     |
| No. of poles                                    | 1                         |
| PIN 1                                           | B 1                       |

|                          |                           |
|--------------------------|---------------------------|
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | black                     |
| No. of poles             | 1                         |
| PIN 1                    | - A 2                     |