


MIRO 6.2 TIMER

Impulsverlängerung 24 VDC / 25 mA / 45 ms

Transistor output  
Impulse expansion: 40...45 ms  
Spring clamp terminals

[Link to Product](#)

Illustration

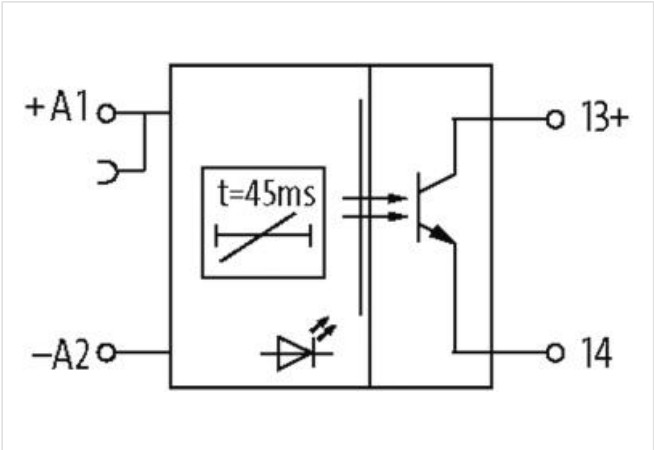

Product may differ from Image



| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27210990 |
| ECLASS-6.1      | 27371790 |
| ECLASS-7.0      | 27371790 |
| ECLASS-8.0      | 27371605 |
| ECLASS-9.0      | 27371605 |
| ECLASS-10.1     | 27371605 |

|                       |               |
|-----------------------|---------------|
| ECLASS-11.1           | 27371605      |
| ECLASS-12.0           | 27371605      |
| ETIM-5.0              | EC001439      |
| customs tariff number | 85364110      |
| GTIN                  | 4048879411608 |
| Packaging unit        | 1             |

#### Electrical data | Output

|                           |        |
|---------------------------|--------|
| Switching frequency max.  | 20 Hz  |
| Voltage switching DC min. | 2 V    |
| Switching voltage DC max. | 30 V   |
| Switching current DC      | 0,1 mA |
| Switching current max.    | 25 mA  |

#### Mechanical data | Mounting data

|                            |                           |
|----------------------------|---------------------------|
| Mounting method            | geschnappt                |
| Suitable for mounting type | mounting rail, (EN 60715) |
| Height                     | 91 mm                     |
| Width                      | 6,2 mm                    |
| Depth                      | 70 mm                     |

#### Environmental characteristics | Climatic

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 60 °C  |
| Storage temperature min.   | -40 °C |
| Storage temperature max.   | 80 °C  |

#### Connection type 4

|                          |                           |
|--------------------------|---------------------------|
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | black                     |
| No. of poles             | 1                         |
| PIN 1                    | 14                        |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | black                     |
| No. of poles             | 1                         |
| PIN 1                    | 13                        |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | black                     |
| No. of poles             | 1                         |
| PIN 1                    | - A 2                     |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | black                     |
| No. of poles             | 1                         |
| PIN 1                    | + A 1                     |