


**Modlink MSDD-set: Frame 4000-68112-0000000,**  
insert 4000-68000-1500000

[Link to Product](#)

Illustration

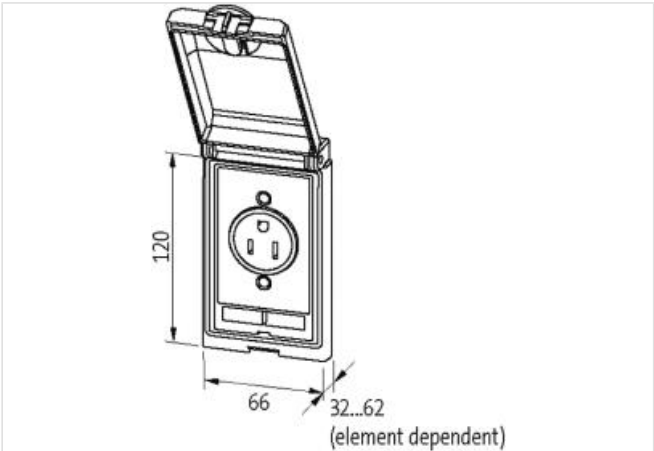

Product may differ from Image



| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27189217 |
| ECLASS-6.1      | 27189217 |
| ECLASS-7.0      | 27189217 |
| ECLASS-8.0      | 27189217 |
| ECLASS-9.0      | 27189217 |
| ECLASS-10.1     | 27182806 |
| ECLASS-11.1     | 27182806 |
| ECLASS-12.0     | 27182806 |

|                       |               |
|-----------------------|---------------|
| ETIM-5.0              | EC002625      |
| customs tariff number | 85366990      |
| GTIN                  | 4048879036436 |
| Packaging unit        | 1             |

**Frame**

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Degree of protection (EN IEC 60529)           | IP65                  |
| Operating temperature min.                    | -10 °C                |
| Operating temperature max.                    | 60 °C                 |
| Storage temperature min.                      | -25 °C                |
| Storage temperature max.                      | 60 °C                 |
| Suitable for installation wall thickness min. | 1 mm                  |
| Suitable for installation wall thickness max. | 5 mm                  |
| Coating housing                               | KTL                   |
| Material housing                              | Fine zinc die casting |

**SUB-D25**

|                                       |                                                |
|---------------------------------------|------------------------------------------------|
| Operating voltage AC                  | 48 V                                           |
| Operating voltage DC                  | 48 V                                           |
| Operating voltage AC max. (UL-listed) | 30 V                                           |
| Operating voltage DC max. (UL-listed) | 42,4 V                                         |
| Operating current                     | 3 A                                            |
| Current operating max. (UL)           | 175 mA                                         |
| Family construction form              | SUB-D25                                        |
| Family type Back side                 | SUB-D25                                        |
| Gender                                | female                                         |
| Gender Rear                           | male                                           |
| Looking techniques                    | Standard UNC 4-40 screw thread bolt (EN 60807) |
| No. of poles                          | 25                                             |

**PS2**

|                               |                     |
|-------------------------------|---------------------|
| Connection cross section max. | 0,5 mm <sup>2</sup> |
| AWG number max.               | 20                  |
| Operating voltage AC          | 30 V                |
| Operating voltage DC          | 30 V                |
| Operating current             | 1 A                 |
| Family construction form      | PS2                 |
| Family type Back side         | PS2                 |
| Gender                        | female              |
| Gender Rear                   | Lötanschluss        |
| Looking techniques            | Screw locking       |
| No. of poles                  | 6                   |