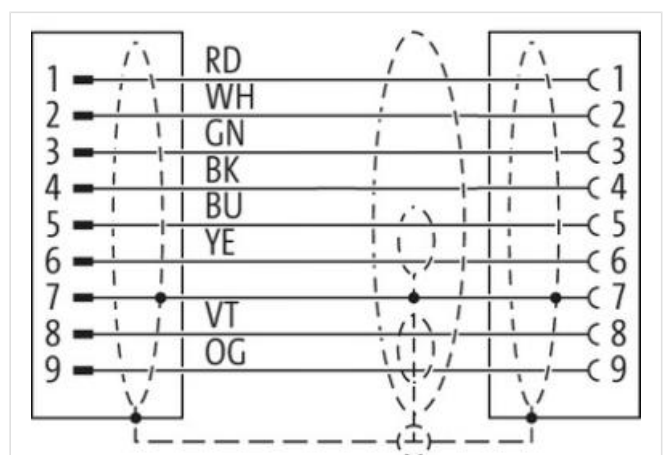
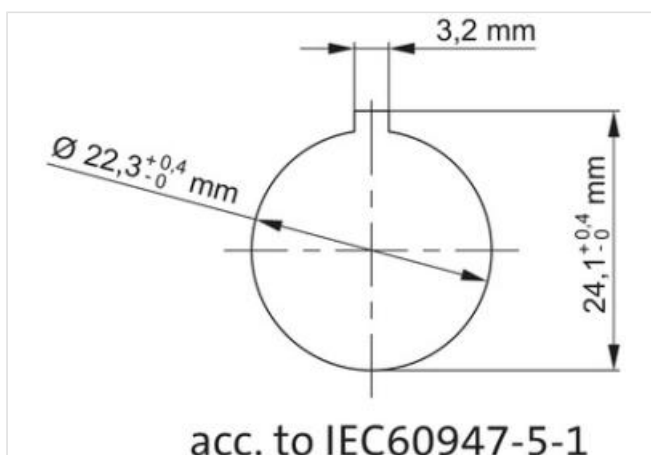
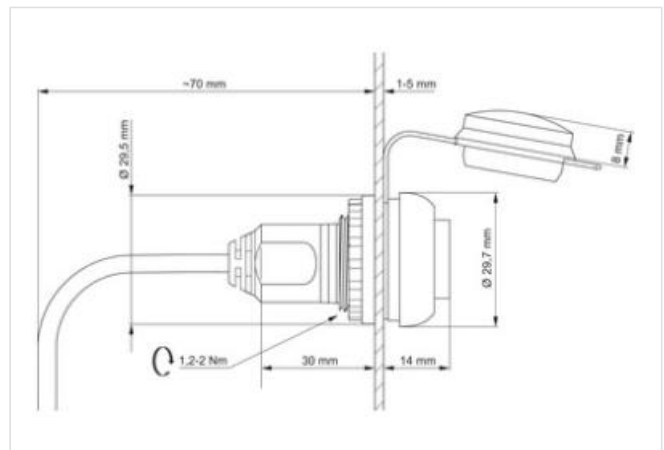




**MSDD pass-through USB 3.0 form A, 0.6 m cable, design black**

Neutral lid without logo

Pass-through

1 × USB 3.0 (female/male/0.6 m cable) form A

[Link to Product](#)
**Illustration**

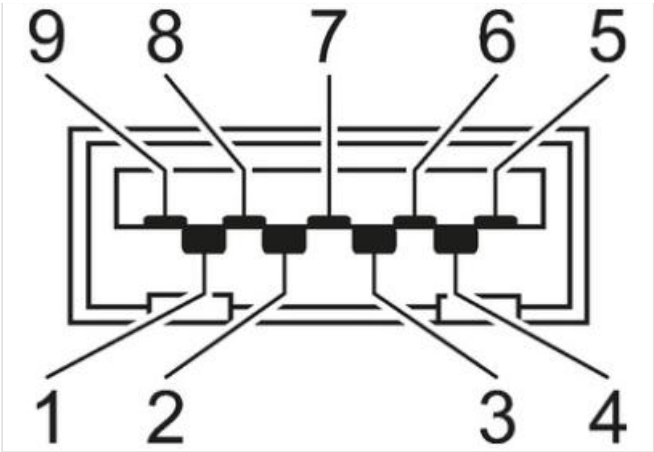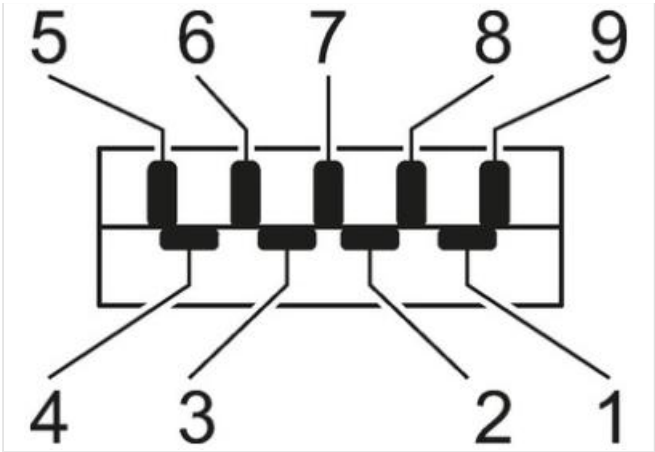


Product may differ from Image



| Commercial data                        |                           |
|----------------------------------------|---------------------------|
| ECLASS-6.0                             | 27143423                  |
| ECLASS-6.1                             | 27143419                  |
| ECLASS-7.0                             | 27440515                  |
| ECLASS-8.0                             | 27440515                  |
| ECLASS-9.0                             | 27440515                  |
| ECLASS-10.1                            | 27440515                  |
| ECLASS-11.1                            | 27440515                  |
| ECLASS-12.0                            | 27440515                  |
| ETIM-5.0                               | EC002625                  |
| customs tariff number                  | 85444290                  |
| GTIN                                   | 4065909037263             |
| Packaging unit                         | 1                         |
| Electrical data   Supply               |                           |
| Operating voltage AC                   | 5 V                       |
| Operating voltage DC                   | 5 V                       |
| Operating current max.                 | 900 mA                    |
| Industrial communication               |                           |
| USB specification                      | 3.0                       |
| Device protection                      |                           |
| Shielded                               | yes                       |
| Device protection   Electrical         |                           |
| Degree of protection (EN IEC 60529)    | IP20, IP65                |
| Protection NEMA                        | 2, 3R, 4, 12, 13, 4x      |
| Additional condition protection degree | inserted, in closed state |
| Device protection   Mechanical         |                           |
| Mechanical endurance                   | 1500 Cycles               |
| Mechanical data   Mounting data        |                           |
| Diameter cutout                        | 22,5 mm                   |
| Diameter                               | 29,5 mm                   |
| Mounting depth                         | 70 mm                     |
| Depth                                  | 30 mm                     |

Approvals

|        |     |
|--------|-----|
| UL 50E | yes |
|--------|-----|