

MQ15-X-Power male receptacle front mount only housing

MQ15-X-Power male receptacle front mount

Male straight


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request. Additionally required contacts for mounting are not included in the scope of delivery.

Link to Product

Illustration



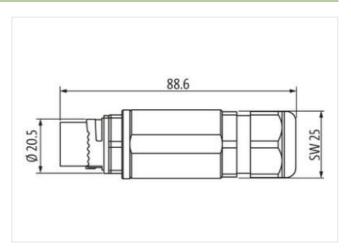

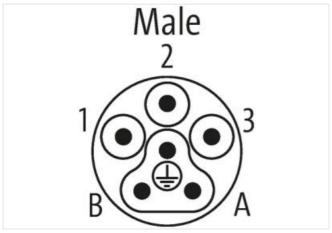

Product may differ from Image

Side 1		
Family construction form	MQ15	
Material contact	Copper alloy	
No. of poles	6	
Commercial data		
ECLASS-6.0	27279220	
ECLASS-7.0	27440103	
ECLASS-8.0	27440103	
ECLASS-9.0	27440103	
ECLASS-10.1	27440103	
ECLASS-11.1	27440103	_



ECLASS-12.0	27440103	
ETIM-5.0	EC002061	
customs tariff number	85472000	
GTIN	4065909015933	
Packaging unit	1	
Electrical data Supply		
Operating voltage AC per power contact max.	600 V	
Operating voltage AC per signal contact max.	63 V	
Operating voltage DC per signal contact max.	63 V	
Operating current per power contact max.	16 A	
Operating current per signal contact max.	10 A	
Installation		
Connection cross section min.	1,5 mm ²	
Connection cross section max.	2,5 mm ²	
Installation Connection		
Connection	Crimp	
Mating cycles min.	500	
Device protection		
Shielded	no	
Device protection Electrical		
Degree of protection (EN IEC 60529)	IP67	
Additional condition protection degree	inserted, screwed	
Pollution Degree	3	
Rated surge voltage	6 kV	
Overvoltage category (EN 60950-1)		
Mechanical data Material data		
Combustibility class (UL94)	НВ	
Material gasket	NBR	
Material housing	PA	
Environmental characteristics Climatic		
Operating temperature min.	-25 °C	
Operating temperature max.	90 °C	
Important installation notes		
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.	
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.	