

Valve plug MSC SuperSeal male/MSC SuperSeal female

PUR 4x0.75 sw 10m

Xtreme - Outdoor

Male straight – female straight

max. 24 V DC

4-pole

without components




Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

Further cable lengths on request.

[Link to Product](#)

Illustration

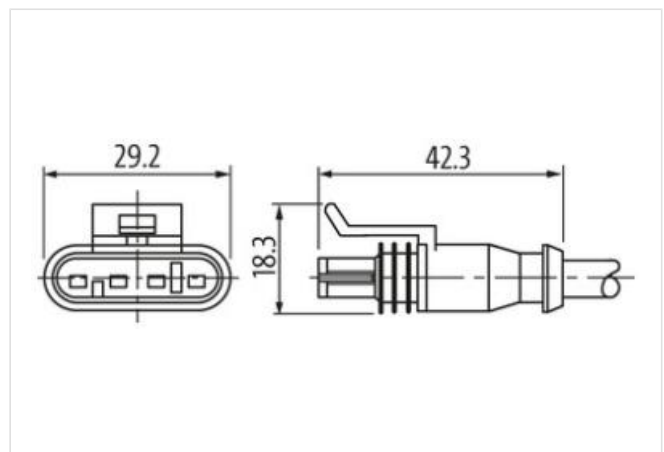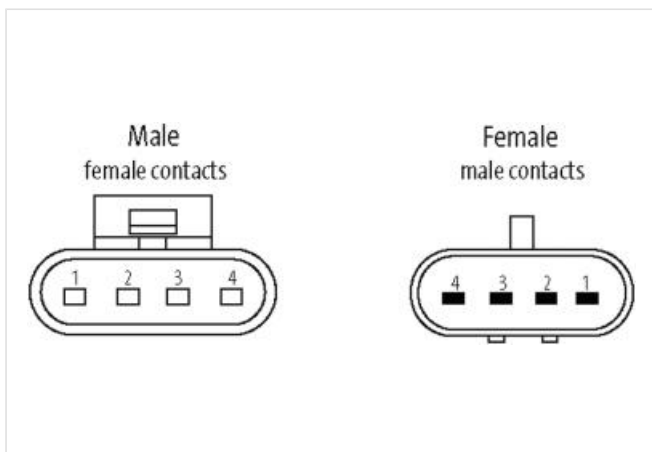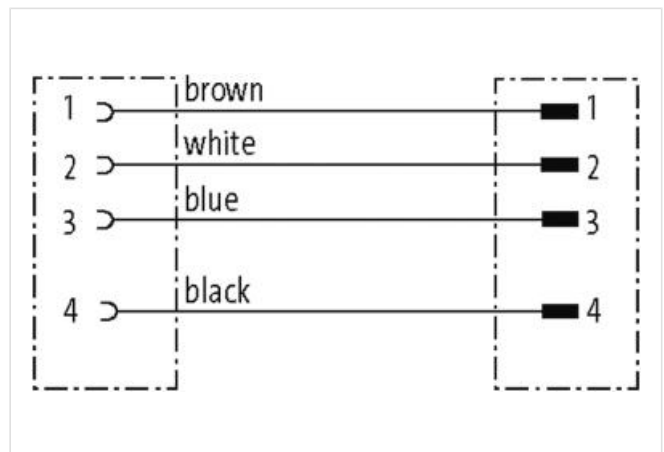

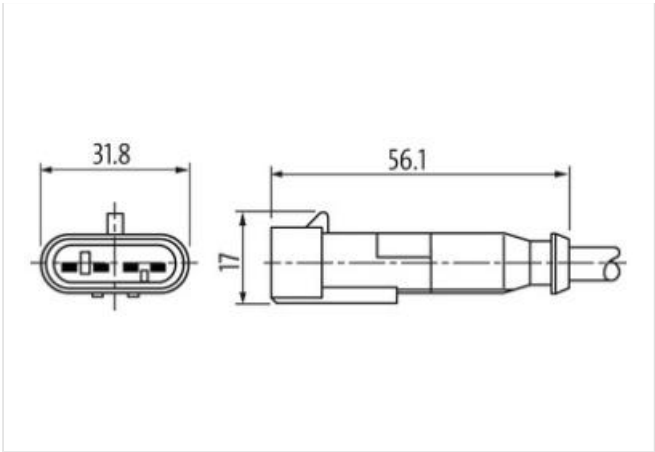

Product may differ from Image

| | |
|--|--------------------|
| Cable length | 10 m |
| Side 1 | |
| Mounting method | inserted |
| Coating contact | tin-plated |
| Family construction form | SuperSeal |
| Material contact | Copper alloy |
| No. of poles | 4 |
| Degree of protection (EN IEC 60529) | IP67, IP69K |
| Side 2 | |
| Mounting method | inserted |
| Coating contact | tin-plated |
| Family construction form | SuperSeal |
| No. of poles | 4 |
| Commercial data | |
| ECLASS-6.0 | 27279218 |
| ECLASS-6.1 | 27279218 |
| ECLASS-7.0 | 27279218 |
| ECLASS-8.0 | 27279218 |
| ECLASS-9.0 | 27060312 |
| ECLASS-10.1 | 27060312 |
| ECLASS-11.1 | 27060312 |
| ECLASS-12.0 | 27060312 |
| ETIM-5.0 | EC000830 |
| customs tariff number | 85444290 |
| GTIN | 4048879703741 |
| Packaging unit | 1 |
| Electrical data Supply | |
| Operating voltage DC max. | 24 V |
| Current operating per contact max. | 7 A |
| Diagnostics | |
| Status indication LED | no |
| Installation Connection | |
| Family construction form | AMP SuperSeal 1.5 |
| Device protection Electrical | |
| Additional condition protection degree | inserted |
| Additional suppressor | without components |

| Mechanical data Material data | |
|--|---|
| Color housing | black |
| Material gasket | Silicon |
| Material housing | Plastic |
| Material overmolding | TPU |
| Mechanical data Mounting data | |
| Looking techniques | Snap-in connector |
| Environmental characteristics Climatic | |
| Operating temperature min. | -40 °C |
| Operating temperature max. | 125 °C |
| Additional condition temperature range | depending on cable quality |
| Important installation notes | |
| Note on strain relief | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. |
| Note on bending radius | Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |
| Installation Cable | |
| Cable identification | 514 |
| Jacket Color | black |
| Amount stranding | 1 |
| Stranding | 4 wires twisted |
| wire arrangement | brown, black, blue, white |
| Material jacket | PUR |
| Outer-diameter (jacket) | 5,7 mm |
| Tolerance outer diameter (sheath) | ± 5 % |
| Material wire insulation | PP |
| Amount wires | 4 |
| Outer diameter insulation | 1,79 mm |
| Outer diameter tolerance core insulation | ± 5 % |
| Amount strands (wire) | 42 |
| Diameter of single wires | 0,15 mm |
| Conductor crosssection (wire) | 0,75 mm² |
| Material conductor wire | Stranded copper wire, bare |
| Conductor type (wire) | strand class 6 |
| Nominal voltage AC max. | 300 V |
| Current load capacity (standard) | to DIN VDE 0298-4 |
| Current load capacity min. wire | 12 A |
| Electrical resistance line constant wire | 58 Ω/km |
| Operating temperature min. (dynamic) | -25 °C |
| Operating temperature max. (dynamic) | 80 °C |
| UV resistance | DIN EN ISO 4892-2 A |
| Flame resistance | UL 1581 § 1100 FT2 IEC 60332-2-2 UL 1581 § 1090 |
| chemical resistance | Good, application-related testing |
| Gasoline resistance | Good, application-related testing |
| Oil resistance | Good, application-related testing DIN EN 60811-404 |
| Bending radius (dynamic) | 6 x Outer diameter |
| Travel speed (C-track) | 2 Mio. |