

B24 Coupling h., high profile, IP65

Double locking lever m., top entry M32


B24  
Coupling housing (high)  
Double locking lever  
IP65  
Technical data will be only guaranteed with Murrelektronik components.

Link to Product

Illustration



Product may differ from Image

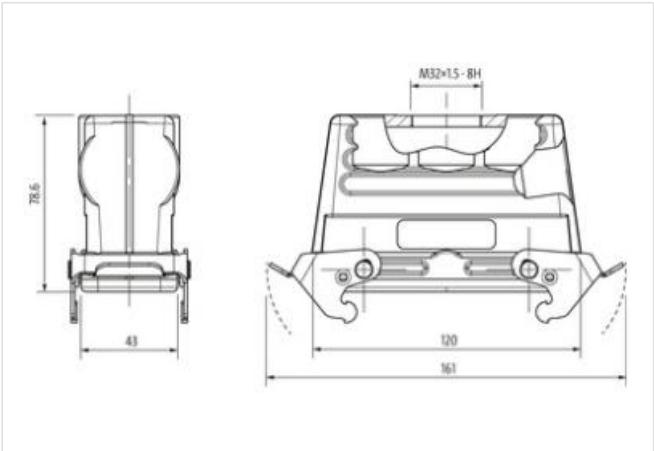

Commercial data

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27143424      |
| ECLASS-6.1            | 27261203      |
| ECLASS-7.0            | 27440202      |
| ECLASS-8.0            | 27440202      |
| ECLASS-9.0            | 27440202      |
| ECLASS-10.1           | 27440202      |
| ECLASS-11.1           | 27440202      |
| ECLASS-12.0           | 27440202      |
| ETIM-5.0              | EC000437      |
| customs tariff number | 85389099      |
| GTIN                  | 4048879646819 |
| Packaging unit        | 1             |

Installation

|              |          |
|--------------|----------|
| Cable outlet | straight |
|--------------|----------|

Installation | Connection

|                    |     |
|--------------------|-----|
| Mounting set       | M32 |
| Mating cycles min. | 500 |

Device protection | Electrical

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Degree of protection (EN IEC 60529)    | IP65                                    |
| Additional condition protection degree | inserted, locked, with screw connection |

Mechanical data

|              |                  |
|--------------|------------------|
| Housing type | Coupling housing |
|--------------|------------------|

Mechanical data | Material data

|                 |               |
|-----------------|---------------|
| Coating housing | powder-coated |
|-----------------|---------------|

|                 |          |
|-----------------|----------|
| Coating locking | verzinkt |
|-----------------|----------|

|                 |     |
|-----------------|-----|
| Material gasket | NBR |
|-----------------|-----|

|                  |                      |
|------------------|----------------------|
| Material housing | Aluminum die casting |
|------------------|----------------------|

|                  |       |
|------------------|-------|
| Locking material | Steel |
|------------------|-------|

**Mechanical data | Mounting data**

|      |     |
|------|-----|
| Size | B24 |
|------|-----|

|        |         |
|--------|---------|
| Height | 78,6 mm |
|--------|---------|

|       |       |
|-------|-------|
| Width | 43 mm |
|-------|-------|

|       |        |
|-------|--------|
| Depth | 161 mm |
|-------|--------|

|                    |                      |
|--------------------|----------------------|
| Locking techniques | Double locking lever |
|--------------------|----------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
|----------------------------|--------|

|                            |        |
|----------------------------|--------|
| Operating temperature max. | 100 °C |
|----------------------------|--------|

|                                    |           |
|------------------------------------|-----------|
| Climatic category (EN IEC 60068-1) | 40/100/21 |
|------------------------------------|-----------|