

## **CAP WITH SPRING PLUG TERMINALS 21 POLE**

Use with MVP12 / Exact12 UNIVERSAL

4-way distribution box M12, UNIVERSAL Spring clamp plug-in terminals Replaces identical product (Art.No. 277314)


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

## **Link to Product**

## Illustration



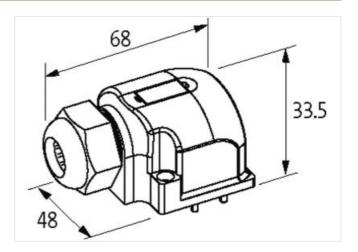



Product may differ from Image



Commercial data	
ECLASS-6.0	27143423
ECLASS-6.1	27279219
ECLASS-7.0	27279219
ECLASS-8.0	27279219
ECLASS-9.0	27440108

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-04-28



ECLASS-10.1	27440111
ECLASS-11.1	27440111
ECLASS-12.0	27440111
ETIM-5.0	EC002585
customs tariff number	85366990
GTIN	4048879378529
Packaging unit	1
Electrical data   Supply	
Total current max.	8 A
Installation	
Connection cross section max.	1,5 mm²
AWG number max.	16
Installation   Connection	
Connection	Spring clamp terminals FK
Device protection   Media	
Flame resistance	flame retardant
Mechanical data   Material data	
Material housing	Plastic
Environmental characteristics   Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	80 °C
Connection type 2	
Family construction form	Сар
No. of poles	21
Family construction form	M12
Gender	female
Color contact carrier	black
Coding	A
No. of poles	5