

## **EXACT12, 8XM12, 5-POLE, BASIC HOUSING**

Without homerun-cable

8-way, 5-pole Form PNP Screw plug-in terminals


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.


## **Link to Product**

## Illustration







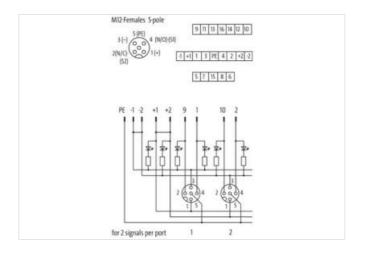

Product may differ from Image









Commercial data		
ECLASS-6.0	27143423	
ECLASS-6.1	27279219	
ECLASS-7.0	27279219	
ECLASS-8.0	27279219	



stay connected

ECLASS-9.0	27440108
ECLASS-10.1	27440111
ECLASS-11.1	27440111
ECLASS-12.0	27440111
ETIM-5.0	EC002585
customs tariff number	85369010
GTIN	4048879054065
Packaging unit	1
Electrical data   Supply	
Operating voltage DC	24 V
Current operating per contact max.	4 A
Total current max.	8 A
Device protection   Electrical	
Degree of protection (EN IEC 60529)	IP65, IP67
Device protection   Media	
Flame resistance	flame retardant
Mechanical data   Material data	
Material housing	Plastic
Environmental characteristics   Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	70 °C