


RM-22/24VAC/DC KL.BZ.EN OUTPUT RELAY

IN: 24 VAC/DC - OUT: 250 VAC/DC / 5 A

2 relays; each 2 NO/NC contacts
8 A
24 V DC
Screw terminals

[Link naar het product](#)

Afbeelding

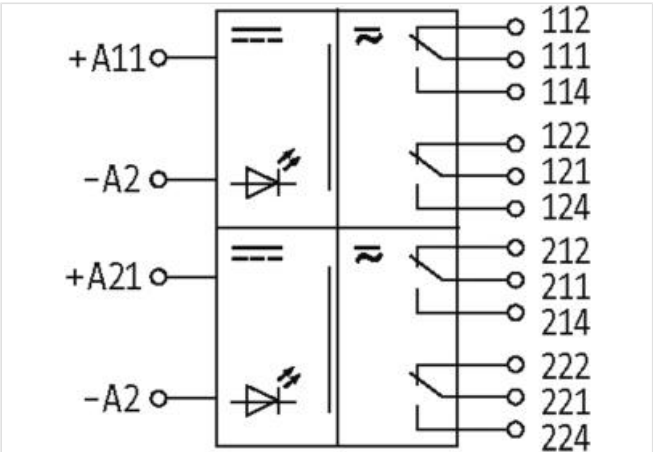

Product van afwijken van afbeelding



Commerciële gegevens	
ECLASS-6.0	27371001
ECLASS-6.1	27371601
ECLASS-7.0	27371601
ECLASS-8.0	27371601
ECLASS-9.0	27371601
ECLASS-10.1	27371601

ECLASS-11.1 27371601

ECLASS-12.0 27371601

ETIM-5.0 EC001437

Douane tarief nummer 85364900

GTIN 4048879027601

Verpakkingseenheid 1

Electrical data | Input

Input voltage AC 24 V

Input voltage AC min. 19,2 V

Input voltage AC max. 30 V

Input voltage DC 24 V

Input voltage DC min. 19,2 V

Input voltage DC max. 30 V

Input current 14 mA

Electrical data | Output

Utilization category AC-15 (EN IEC 60947-5-1) 3 A @ 24 V, 3 A @ 110 V, 3 A @ 230 V

Utilization category DC-13 (EN IEC 60947-5-1) 2 A @ 24 V, 0,3 A @ 110 V, 0,2 A @ 230 V

Additional condition switching frequency with load

Switching frequency max. 0,1 Hz

Power rating AC max. 1250 VA

Power rating DC max. 240 W

Switching voltage AC max. 250 V

Switching voltage DC max. 250 V

Switching current DC 100 mA

Switching current max. 8 A

Switching capacity AC-12 (EN IEC 60947-5-1) 8 A (24/110/230 V AC)

Diagnostics

Status indication LED red

Device protection

Condition lifetime load-dependent

Device protection | Electrical

Rated surge voltage 4 kV

Electrical lifetime 20000000 Cycles

Device protection | Mechanical

Mechanical endurance 20000000 Cycles

Mechanical data

Drop-out time max. 10 ms

Response time max. 10 ms

Bounce time max. 2 ms

Mechanical data | Material data

Material contact Ag Ni 0.15 hv

Mechanical data | Mounting data

Mounting method geschnappt

Suitable for mounting type Mounting rail TH35, G32, (EN 60715)

Height 75 mm

Width 22,5 mm

Depth 85 mm

Environmental characteristics | Climatic

Operating temperature min. -20 °C

Operating temperature max. 50 °C

Connection type 4	
Connection type 1	X1
Connection type 2	X2
Connection type 3	X3
Connection type 4	X4
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	4
PIN 1	212
PIN 2	- A 2
PIN 3	+ A 21
PIN 4	+ A 11
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	4
PIN 1	114
PIN 2	112
PIN 3	211
PIN 4	214
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	4
PIN 1	- A 2
PIN 2	222
PIN 3	221
PIN 4	224
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	4
PIN 1	122
PIN 2	121
PIN 3	124
PIN 4	111