

UFL 50 L PLUG FOR SIGNAL TRANSFER

24 VDC / 1 A - male with LED




Ribbon cable connector + LED

50-pole


Via the combined fixing mechanism, connectors with or without strain relief can be connected.  
for plugs with or without strain relief (DIN 41651); for plugs with strain relief, it may be necessary to remove the bottom hook

[Link naar het product](#)

Afbeelding

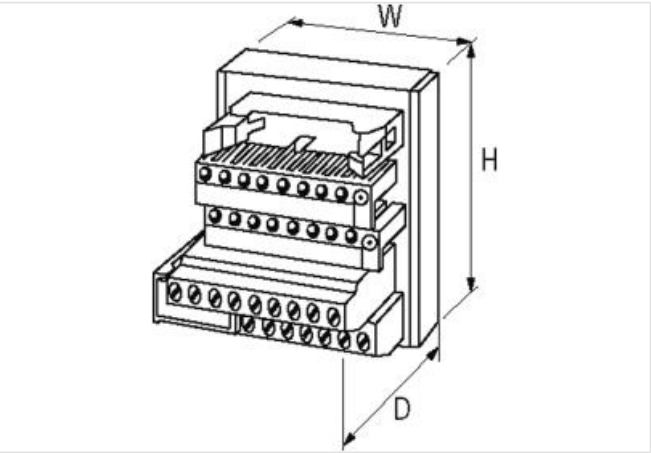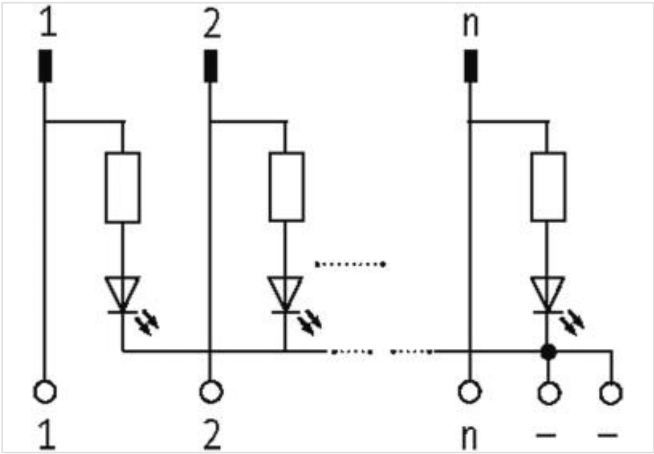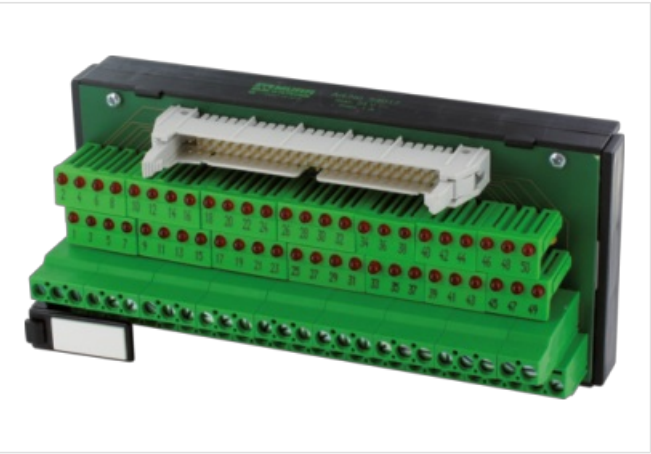

Product van afwijken van afbeelding



| Commerciële gegevens |          |
|----------------------|----------|
| ECLASS-6.0           | 27141120 |
| ECLASS-6.1           | 27141120 |
| ECLASS-7.0           | 27141120 |
| ECLASS-8.0           | 27141120 |
| ECLASS-9.0           | 27141120 |

|                      |               |
|----------------------|---------------|
| ECLASS-10.1          | 27141120      |
| ECLASS-11.1          | 27141120      |
| ECLASS-12.0          | 27141120      |
| ETIM-5.0             | EC001283      |
| Douane tarief nummer | 85366990      |
| GTIN                 | 4048879026567 |
| Verpakkingseenheid   | 1             |

**Electrical data | Supply**

|                        |      |
|------------------------|------|
| Operating voltage AC   | 24 V |
| Operating current max. | 1 A  |

**Diagnostics**

|                       |     |
|-----------------------|-----|
| Status indication LED | red |
|-----------------------|-----|

**Device protection | Electrical**

|                                   |    |
|-----------------------------------|----|
| Overvoltage category (EN 60664-1) | II |
|-----------------------------------|----|

**Mechanical data | Mounting data**

|                            |                           |
|----------------------------|---------------------------|
| Mounting method            | geschnappt                |
| Suitable for mounting type | mounting rail, (EN 60715) |
| Height                     | 63 mm                     |
| Width                      | 140 mm                    |
| Depth                      | 48 mm                     |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 70 °C  |