



MASI20 INSTALLATION TECHNOLOGY

Distributor AS-I and extern power, 1 potential

- 5 ports, universal
- 1 potential
- 5 plug terminals included

[Link naar het product](#)

Afbeelding

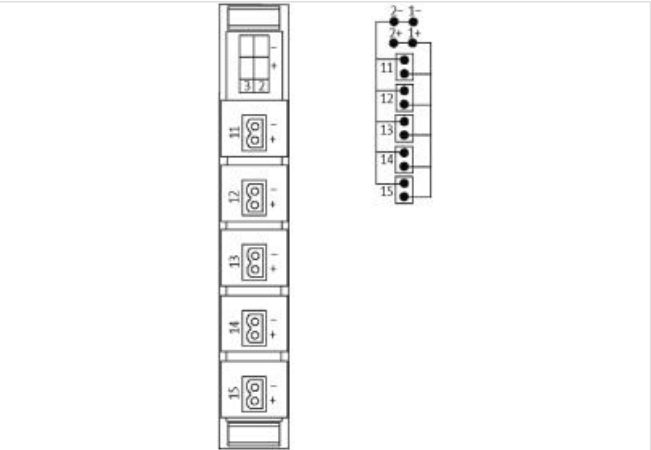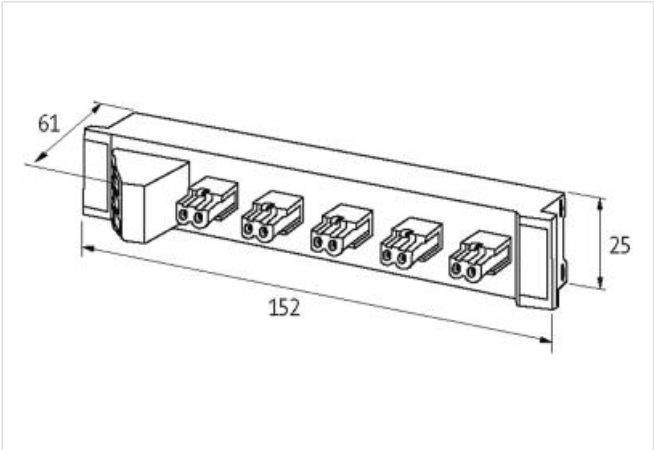

Product van afwijken van afbeelding



| Commerciële gegevens |          |
|----------------------|----------|
| ECLASS-6.0           | 27279219 |
| ECLASS-6.1           | 27279219 |
| ECLASS-7.0           | 27279219 |
| ECLASS-8.0           | 27279219 |
| ECLASS-9.0           | 27440108 |
| ECLASS-10.1          | 27440111 |
| ECLASS-11.1          | 27440111 |

|                                                 |                           |
|-------------------------------------------------|---------------------------|
| ECLASS-12.0                                     | 27440111                  |
| ETIM-5.0                                        | EC001596                  |
| Douane tarief nummer                            | 85369010                  |
| GTIN                                            | 4048879050463             |
| Verpakkingseenheid                              | 1                         |
| <b>Electrical data   Supply</b>                 |                           |
| Operating voltage DC max.                       | 36 V                      |
| Current operating per port max.                 | 8 A                       |
| Total current max.                              | 12 A                      |
| <b>Device protection   Electrical</b>           |                           |
| Degree of protection (EN IEC 60529)             | IP20                      |
| Insulation strength Power/Power (EN 60664-1)    | 50 V                      |
| Insulation strength ASI/Power                   | 200 V                     |
| <b>Mechanical data   Mounting data</b>          |                           |
| Mounting method                                 | geschnappt                |
| Suitable for mounting type                      | mounting rail, (EN 60715) |
| Height                                          | 61 mm                     |
| Width                                           | 25 mm                     |
| Depth                                           | 152 mm                    |
| <b>Environmental characteristics   Climatic</b> |                           |
| Operating temperature min.                      | -20 °C                    |
| Operating temperature max.                      | 70 °C                     |
| <b>Conformity</b>                               |                           |
| Product standard                                | EN 60664-1                |
| <b>Connection type 6</b>                        |                           |
| Connection type 1                               | 11                        |
| Connection type 2                               | 12                        |
| Connection type 3                               | 13                        |
| Connection type 4                               | 14                        |
| Connection type 5                               | 15                        |
| Connection type 6                               | Power / Asi               |
| Connection                                      | Screw terminals SK        |
| Family construction form                        | terminal                  |
| Gender                                          | female                    |
| Color contact carrier                           | green                     |
| No. of poles                                    | 2                         |
| PIN 1                                           | 11 +                      |
| PIN 2                                           | 11 -                      |
| Connection                                      | Screw terminals SK        |
| Family construction form                        | terminal                  |
| Gender                                          | female                    |
| Color contact carrier                           | green                     |
| No. of poles                                    | 2                         |
| PIN 1                                           | 12 +                      |
| PIN 2                                           | 12 -                      |
| Connection                                      | Screw terminals SK        |
| Family construction form                        | terminal                  |
| Gender                                          | female                    |
| Color contact carrier                           | green                     |
| No. of poles                                    | 2                         |
| PIN 1                                           | 13 +                      |

|                          |                    |
|--------------------------|--------------------|
| PIN 2                    | 13 -               |
| Connection               | Screw terminals SK |
| Family construction form | terminal           |
| Gender                   | female             |
| Color contact carrier    | green              |
| No. of poles             | 2                  |
| PIN 1                    | 14 +               |
| PIN 2                    | 14 -               |
| Connection               | Screw terminals SK |
| Family construction form | terminal           |
| Gender                   | female             |
| Color contact carrier    | green              |
| No. of poles             | 2                  |
| PIN 1                    | 15 +               |
| PIN 2                    | 15 -               |
| Connection               | Screw terminals SK |
| Family construction form | terminal           |
| Gender                   | female             |
| Color contact carrier    | green              |
| No. of poles             | 4                  |
| PIN 1                    | 1 +                |
| PIN 2                    | 1 -                |
| PIN 3                    | 2 +                |
| PIN 4                    | 2 -                |