


MASI65 VALVE PLUG PLUG

2 digital inputs, 2 digital outputs

Digital inputs/outputs  
DI2 - 0.2 A (M12)  
DO2 - 2 A (Form A/M12)  
24 V DC external (18...30.2 V DC) EN 61131-2, connection via black AS-Interface profile cable

Link naar het product

Afbeelding

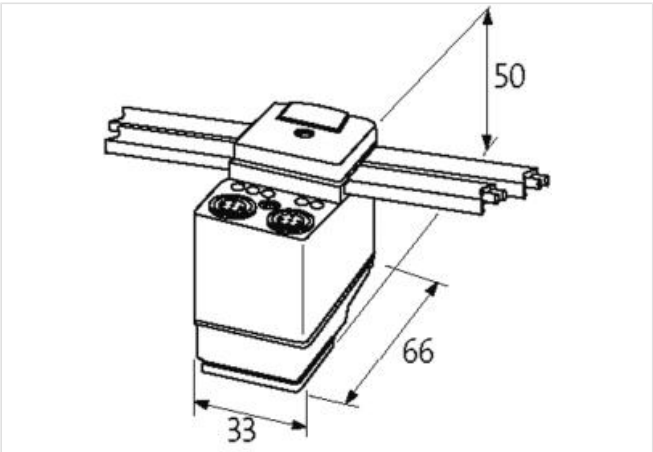

Product van afwijken van afbeelding



| Commerciële gegevens               |               |
|------------------------------------|---------------|
| ECLASS-6.0                         | 27242604      |
| ECLASS-6.1                         | 27242604      |
| ECLASS-7.0                         | 27242604      |
| ECLASS-8.0                         | 27242604      |
| ECLASS-9.0                         | 27242604      |
| ECLASS-10.1                        | 27242604      |
| ECLASS-11.1                        | 27242604      |
| ECLASS-12.0                        | 27242604      |
| ETIM-5.0                           | EC001599      |
| Douane tarief nummer               | 85176200      |
| GTIN                               | 4048879050180 |
| Verpakkingseenheid                 | 1             |
| Electrical data   Supply           |               |
| Bus voltage AS-Interface DC min.   | 26,5 V        |
| Bus voltage AS-Interface DC max.   | 31,6 V        |
| Current consumption AS-i port max. | 250 mA        |
| Total current max.                 | 2 A           |
| Electrical data   Input            |               |
| Overload resistant                 | yes           |
| Short-circuit protected            | yes           |

|                                                 |                                                |
|-------------------------------------------------|------------------------------------------------|
| Type input                                      | PNP, for 3-wire sensors or mechanical switches |
| Current carrying capacity max.                  | 0,2 A                                          |
| <b>Electrical data   Output</b>                 |                                                |
| Overload resistant                              | yes                                            |
| Short-circuit protected                         | yes                                            |
| Output current per pin max.                     | 2 A                                            |
| <b>Industrial communication   Bus data</b>      |                                                |
| Address range min.                              | 1                                              |
| Address range max.                              | 31                                             |
| Address setting type                            | Addressing socket                              |
| <b>Industrial communication   AS-Interface</b>  |                                                |
| Profile (IO.ID.ID2)                             | S-3.F.E                                        |
| <b>Diagnostics</b>                              |                                                |
| Diagnostic                                      | No voltage                                     |
| Diagnostic via LED                              | per module                                     |
| LED display                                     | Ethernet connection/data traffic               |
| <b>Installation</b>                             |                                                |
| Contact distance                                | 18 mm                                          |
| <b>Device protection   Electrical</b>           |                                                |
| Degree of protection (EN IEC 60529)             | IP67                                           |
| <b>Mechanical data   Mounting data</b>          |                                                |
| Height                                          | 50 mm                                          |
| Width                                           | 33 mm                                          |
| Depth                                           | 66 mm                                          |
| <b>Environmental characteristics   Climatic</b> |                                                |
| Operating temperature min.                      | -20 °C                                         |
| Operating temperature max.                      | 70 °C                                          |
| Storage temperature min.                        | -20 °C                                         |
| Storage temperature max.                        | 70 °C                                          |
| <b>Connection type 3</b>                        |                                                |
| Connection type 1                               | Ausgang O 1                                    |
| Connection type 2                               | Ausgang O 2                                    |
| Connection type 3                               | Eingänge I 1 & I 2                             |
| Family construction form                        | MSUD A                                         |
| Gender                                          | female                                         |
| Color contact carrier                           | black                                          |
| No. of poles                                    | 2                                              |
| PIN 1                                           | 0 V                                            |
| PIN 2                                           | DO 1                                           |
| Family construction form                        | M12                                            |
| Gender                                          | female                                         |
| Color contact carrier                           | black                                          |
| Coding                                          | A                                              |
| No. of poles                                    | 5                                              |
| PIN 1                                           | n.c.                                           |
| PIN 2                                           | n.c.                                           |
| PIN 3                                           | 0 V                                            |
| PIN 4                                           | DO 2                                           |
| PIN 5                                           | n.c.                                           |
| Family construction form                        | M12                                            |
| Gender                                          | female                                         |

|                       |         |
|-----------------------|---------|
| Color contact carrier | black   |
| Coding                | A       |
| No. of poles          | 5       |
| PIN 1                 | Usens + |
| PIN 2                 | DI 2    |
| PIN 3                 | Usens - |
| PIN 4                 | DI 1    |
| PIN 5                 | n.c.    |