

CUBE20S COMMUNICATION MODULE

RS422/485

RS422


RS485

[Link naar het product](#)

Afbeelding



Product van afwijken van afbeelding

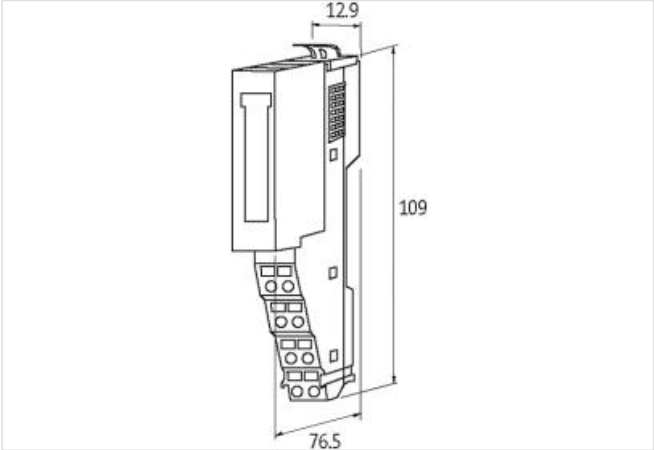

| Commerciële gegevens        |                                  |
|-----------------------------|----------------------------------|
| ECLASS-6.0                  | 27242605                         |
| ECLASS-7.0                  | 27242605                         |
| ECLASS-8.0                  | 27242605                         |
| ECLASS-9.0                  | 27242605                         |
| ETIM-5.0                    | EC001604                         |
| Douane tarief nummer        | 85389099                         |
| GTIN                        | 4048879422918                    |
| Verpakkingseenheid          | 1                                |
| Electrical data   Supply    |                                  |
| Current consumption max.    | 100 mA                           |
| module supply               | via system connection            |
| Industrial communication    |                                  |
| Transmission rate min.      | 150 KBit/s                       |
| Data transmission rate max. | 115,2 KBit/s                     |
| Diagnostics                 |                                  |
| Diagnostic                  | Under voltage                    |
| Diagnostic via BUS          | per module                       |
| Diagnostic via LED          | per module and channel           |
| Short circuit diagnosis     | yes                              |
| LED display                 | Ethernet connection/data traffic |
| Overload diagnosis          | yes                              |

**Device protection | Electrical**

|                                     |      |
|-------------------------------------|------|
| Degree of protection (EN IEC 60529) | IP20 |
|-------------------------------------|------|

**Mechanical data | Mounting data**

|                            |                           |
|----------------------------|---------------------------|
| Mounting method            | geschnappt                |
| Suitable for mounting type | mounting rail, (EN 60715) |
| Height                     | 109 mm                    |
| Width                      | 12,9 mm                   |
| Depth                      | 76,5 mm                   |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | 0 °C   |
| Operating temperature max. | 60 °C  |
| Storage temperature min.   | -25 °C |
| Storage temperature max.   | 70 °C  |

**Connection type 2**

|                          |                           |
|--------------------------|---------------------------|
| Connection type 1        | Power                     |
| Connection type 2        | Power                     |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| No. of poles             | 8                         |
| PIN 1                    | n.c.                      |
| PIN 2                    | 24 V DC                   |
| PIN 3                    | 0 V                       |
| PIN 4                    | 24 V DC Sys               |
| PIN 5                    | n.c.                      |
| PIN 6                    | 24 V DC                   |
| PIN 7                    | 0 V                       |
| PIN 8                    | 0 V Sys                   |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| No. of poles             | 8                         |
| PIN 1                    | TXD-P                     |
| PIN 2                    | RXD-P / TXD / RXD-P       |
| PIN 3                    | RTS                       |
| PIN 4                    | TERM                      |
| PIN 5                    | TXD-N                     |
| PIN 6                    | RXD-N / TXD / RXD-N       |
| PIN 7                    | GND_ISO                   |
| PIN 8                    | TERM                      |