



MKS - D 20/1300-1 P DIODE MODULES

Mounting rail / screw-type terminal

Universal diode 1 300 V, 1 A
20 diodes
Common potential cathode
Diode modules are suitable for the suppression of inductive loads (valve, contactor, etc.)

[Link naar het product](#)

Afbeelding

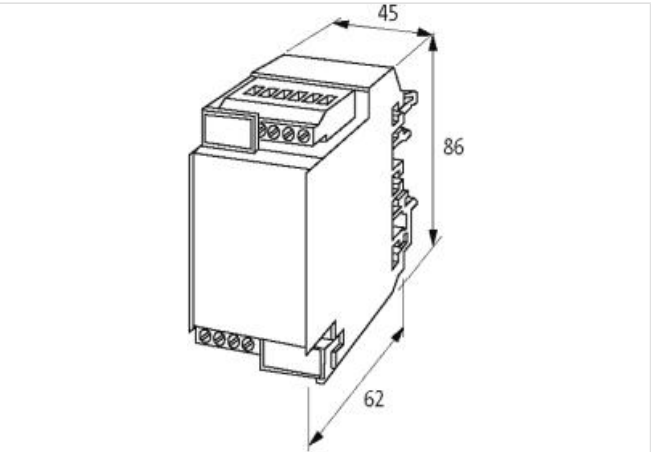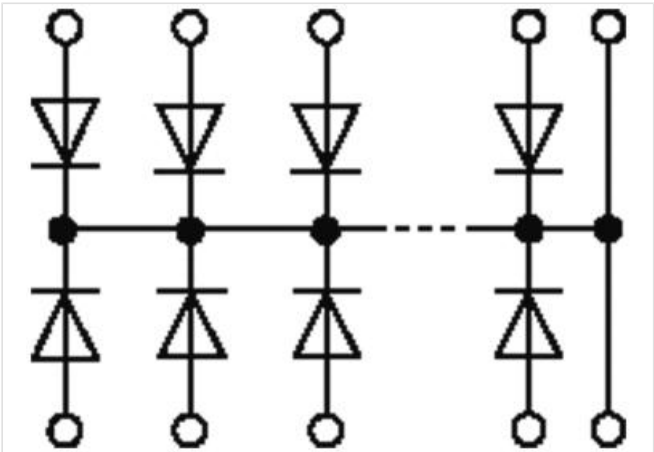

Product van afwijken van afbeelding



Commerciële gegevens	
ECLASS-6.0	27371010
ECLASS-6.1	27371010
ECLASS-7.0	27371010
ECLASS-8.0	27371010
ECLASS-9.0	27371010
ECLASS-10.1	27371010

ECLASS-11.1	27371010
ECLASS-12.0	27371010
ETIM-5.0	EC002780
Douane tarief nummer	85411000
GTIN	4048879041911
Verpakkingseenheid	1

Electrical data | Supply

Operating voltage AC max.	48 V
Operating voltage DC max.	48 V

Installation

Connection cross section max.	4 mm ²
-------------------------------	-------------------

Installation | Connection

Connection	Screw terminals SK
------------	--------------------

Mechanical data | Mounting data

Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, G32, (EN 60715)
Height	86 mm
Width	45 mm
Depth	62 mm

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	60 °C

Connection type 1

Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	22