



ASSEMBLY MODULE MKS - M 4

Mounting rail / screw-type terminal

4 pairs of solder pins  
screw terminals connected to solder pin pairs

[Link naar het product](#)

Afbeelding

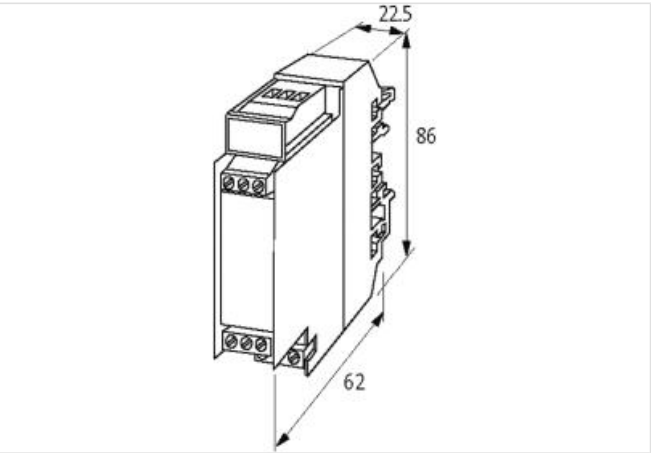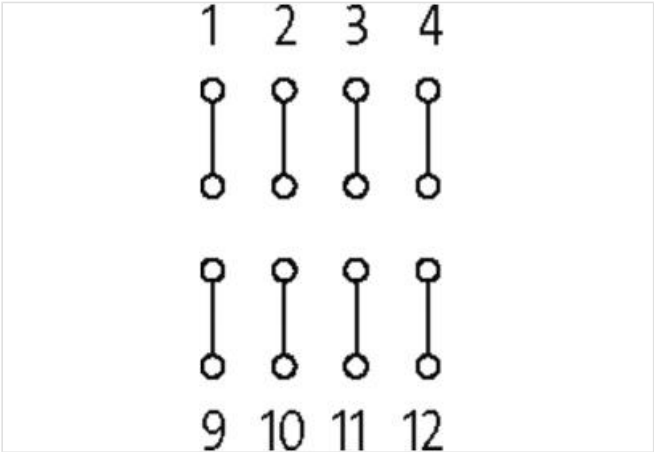

Product van afwijken van afbeelding



| Commerciële gegevens |          |
|----------------------|----------|
| ECLASS-6.0           | 27379201 |
| ECLASS-6.1           | 27141149 |
| ECLASS-7.0           | 27141149 |
| ECLASS-8.0           | 27141149 |
| ECLASS-9.0           | 27141149 |
| ECLASS-10.1          | 27141149 |
| ECLASS-11.1          | 27141149 |
| ECLASS-12.0          | 27141149 |

|                                                 |                                     |
|-------------------------------------------------|-------------------------------------|
| ETIM-5.0                                        | EC002780                            |
| Douane tarief nummer                            | 85369010                            |
| GTIN                                            | 4048879041812                       |
| Verpakkingseenheid                              | 1                                   |
| <b>Electrical data   Supply</b>                 |                                     |
| Operating voltage AC max.                       | 250 V                               |
| Operating voltage DC max.                       | 250 V                               |
| Operating current max.                          | 2,5 A                               |
| <b>Device protection   Media</b>                |                                     |
| Flame resistance                                | flame retardant                     |
| <b>Mechanical data   Material data</b>          |                                     |
| Housing properties                              | removable cover                     |
| Material housing                                | Plastic                             |
| <b>Mechanical data   Mounting data</b>          |                                     |
| Distance of solder pins                         | 30 mm                               |
| Mounting method                                 | geschnappt                          |
| Suitable for mounting type                      | Mounting rail TH35, G32, (EN 60715) |
| Height                                          | 68 mm                               |
| Width                                           | 22,5 mm                             |
| Depth                                           | 65 mm                               |
| <b>Environmental characteristics   Climatic</b> |                                     |
| Operating temperature min.                      | -20 °C                              |
| Operating temperature max.                      | 60 °C                               |
| <b>Connection type 1</b>                        |                                     |
| Connection                                      | Screw terminals SK                  |
| Family construction form                        | terminal                            |
| Gender                                          | female                              |
| No. of poles                                    | 8                                   |