


R-Button 30 DS 1NO L M12(4)

Illuminated reset button

R-Button 30 DS 1NO L M12(4)
Illuminated reset button
Frontring and cover stainless steel
Mounting hole 30,3 mm
Connection M12 (4-pin)

[Link naar het product](#)

Afbeelding

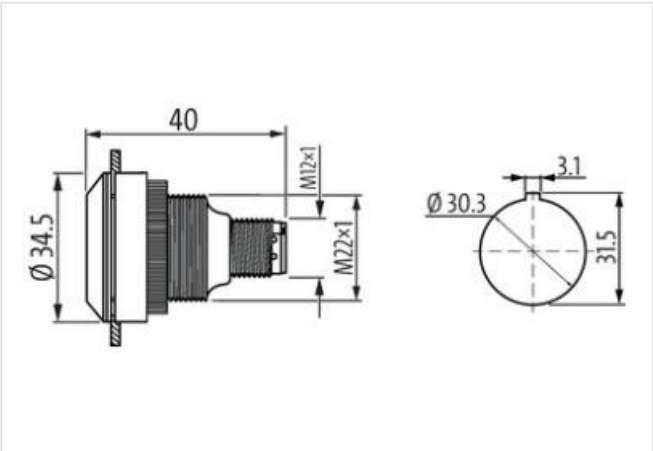

Product van afwijken van afbeelding



Commerciële gegevens

ECLASS-6.1	27371228
ECLASS-7.0	27371228
ECLASS-8.0	27371228
ECLASS-9.0	27371228
ECLASS-10.1	27371228
ECLASS-11.1	27371228
ECLASS-12.0	27371228
Douane tarief nummer	85365080
GTIN	4065909019634
Verpakkingseenheid	1

Electrical data | Supply

Operating voltage DC min.	20 V
Operating voltage DC max.	28 V
Rated operating voltage AC-15	35 V
Rated operating voltage DC-13	35 V
Rated operating current	0,1 A

Electrical data | Input

Short-circuit current	1000 A
-----------------------	--------

Electrical data | Output

Switching power max.	1 W
----------------------	-----

Voltage switching AC min.	0,02 V
---------------------------	--------

Switching voltage AC max.	35 V
---------------------------	------

Voltage switching DC min.	0,02 V
---------------------------	--------

Switching voltage DC max.	35 V
---------------------------	------

Switching voltage DC max. (UL 60947)	30 V
--------------------------------------	------

Switching voltage peak DC (UL 60947)	42,4 V
--------------------------------------	--------

Switching current min.	0,01 mA
------------------------	---------

Switching current max.	100 mA
------------------------	--------

Installation | Connection

Family construction form	M12
--------------------------	-----

Installation | Pin assignment

Coding	A
--------	---

No. of poles	4
--------------	---

Device protection | Electrical

Installation height max. ASL	2000 m
------------------------------	--------

Degree of protection front (EN IEC 60529)	IP66, IP67, IP69
---	------------------

Degree of protection back (EN IEC 60529)	IP66, IP67
--	------------

Pollution Degree	2
------------------	---

Short circuit protective device (SCPD)	fuse 250 V / 0.1 A / 1.5 kA gG quick
--	--------------------------------------

Rated insulation voltage	250 V
--------------------------	-------

Overvoltage category (EN 60950-1)	II
-----------------------------------	----

Device protection | Mechanical

Mechanical endurance	500000 Cycles
----------------------	---------------

Mechanical endurance B10	650000 Cycles
--------------------------	---------------

UL enclosure type rating front side	type 4X
-------------------------------------	---------

Device protection | Media

Salt-spray resistance (IEC 60068-2-11)	yes
--	-----

Mechanical data

Can be illuminated	yes
--------------------	-----

Actuating function	spring return
--------------------	---------------

Actuating force min.	5 N
----------------------	-----

Actuating force max.	12 N
----------------------	------

Actuating travel max.	1 mm
-----------------------	------

Color	black
-------	-------

Color bezel	Stainless steel
-------------	-----------------

Color collar	black
--------------	-------

Color front ring	Stainless steel
------------------	-----------------

Color illuminant	white
------------------	-------

Shape collar	round
--------------	-------

Contact type	1 S
--------------	-----

Type of illuminant	LED
--------------------	-----

Mechanical data | Material data

Material housing	Plastic
------------------	---------

Material contact	Gold
------------------	------

Mechanical data | Mounting data

Mounting method	Threaded ring
-----------------	---------------

Installation height	3,9 mm
---------------------	--------

Mounting depth	36,4 mm
----------------	---------

Mounting hole	30,3 mm
---------------	---------

Height	34,5 mm
--------	---------

Width	40 mm
-------	-------

Grid min.	35 mm
-----------	-------

Environmental characteristics | Climatic

Operating temperature min.	-25 °C
----------------------------	--------

Operating temperature max.	70 °C
----------------------------	-------

Derating from	40 °C
---------------	-------

Storage temperature min.	-40 °C
--------------------------	--------

Storage temperature max.	85 °C
--------------------------	-------

Relative humidity max. (operation)	93 %
------------------------------------	------

Connection type 1

Family construction form	M12
--------------------------	-----

Gender	male
--------	------

Color contact carrier	black
-----------------------	-------

Coding	A
--------	---

No. of poles	4
--------------	---

PIN 1	NO
-------	----

PIN 2	LED (A)
-------	---------

PIN 3	LED (K)
-------	---------

PIN 4	NO
-------	----