



LED-INDICATOR GREEN

LED 5mm - 24V AC/DC - 15mA - IP40

(green)  
24 V AC/DC  
Protection IP40

[Link naar het product](#)

Afbeelding

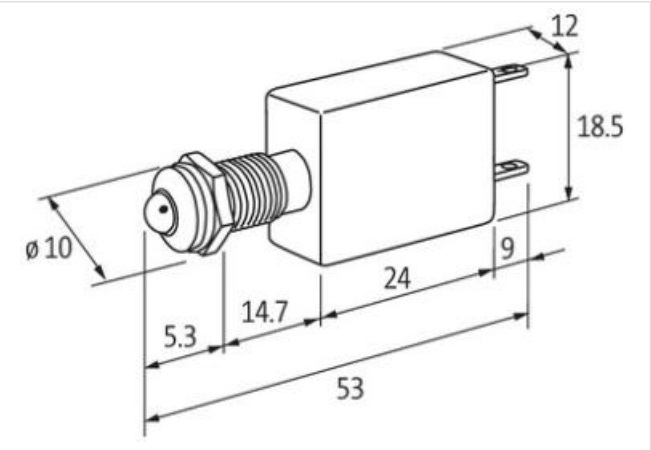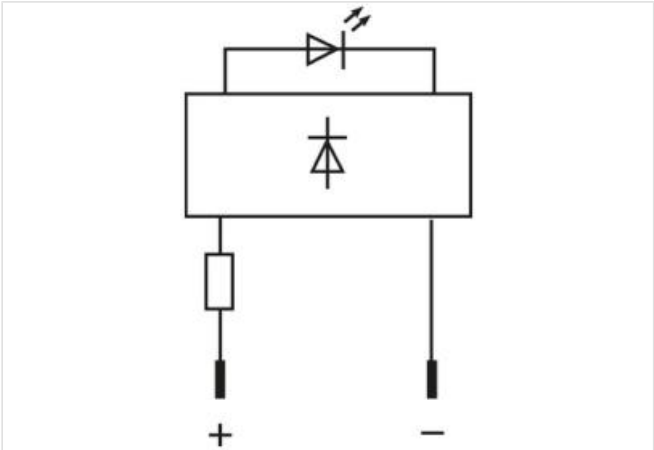

Product van afwijken van afbeelding

| Commerciële gegevens |               |
|----------------------|---------------|
| ECLASS-6.0           | 27261590      |
| ECLASS-6.1           | 27261501      |
| ECLASS-7.0           | 27261501      |
| ECLASS-8.0           | 27261501      |
| ECLASS-9.0           | 27261501      |
| ECLASS-10.1          | 27261501      |
| ECLASS-11.1          | 27261501      |
| ECLASS-12.0          | 27261501      |
| ETIM-5.0             | EC000272      |
| Douane tarief nummer | 85318070      |
| GTIN                 | 4048879040990 |

Verpakkingseenheid 10

**Electrical data | Supply**

|                           |        |
|---------------------------|--------|
| Operating voltage AC      | 24 V   |
| Operating voltage AC min. | 20,4 V |
| Operating voltage AC max. | 26,4 V |
| Operating voltage DC      | 24 V   |
| Operating voltage DC min. | 20,4 V |
| Operating voltage DC max. | 26,4 V |
| Current consumption min.  | 13 mA  |
| Current consumption max.  | 17 mA  |

**Installation | Connection**

Connection information Faston 2.8x0.8 mm

**Device protection | Electrical**

Degree of protection (EN IEC 60529) IP40

**Mechanical data**

Diameter LED 5 mm

**Mechanical data | Material data**

Color housing gray  
Material housing PVC

**Mechanical data | Mounting data**

Diameter front panel drilling 8 mm  
Height 18,5 mm  
Width 12 mm  
Depth 53 mm

**Environmental characteristics | Climatic**

Operating temperature min. -40 °C  
Operating temperature max. 70 °C