
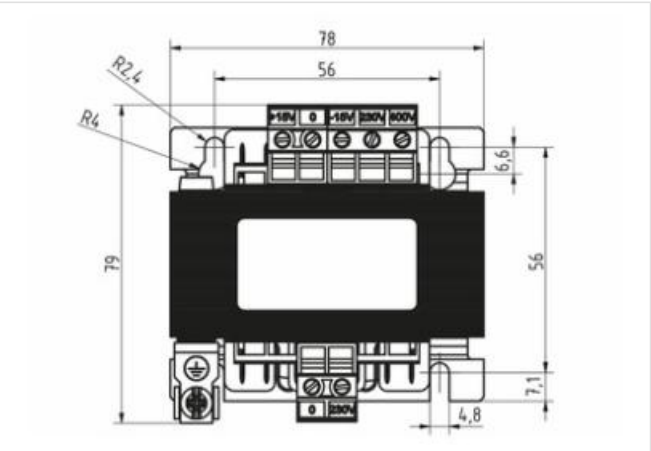


MET 0063-230-400±15V/230 UL


The MET series comprises single-phase control transformers/isolating transformers of the protection class I and protection degree IP00 with double insulation between the primary and secondary windings for general use in industrial applications.

[Link naar het product](#)

Afbeelding

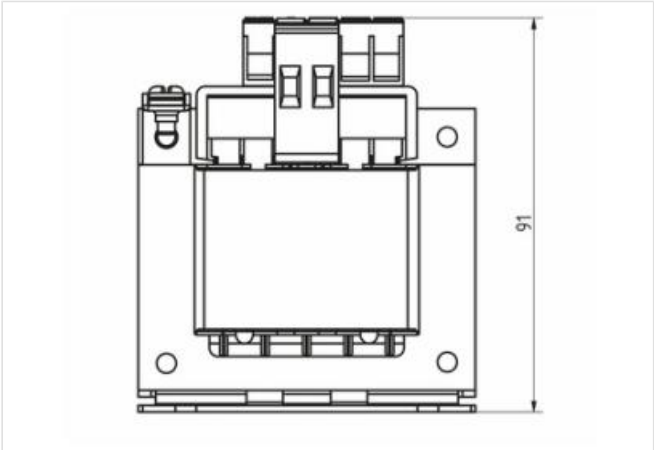

Product van afwijken van afbeelding

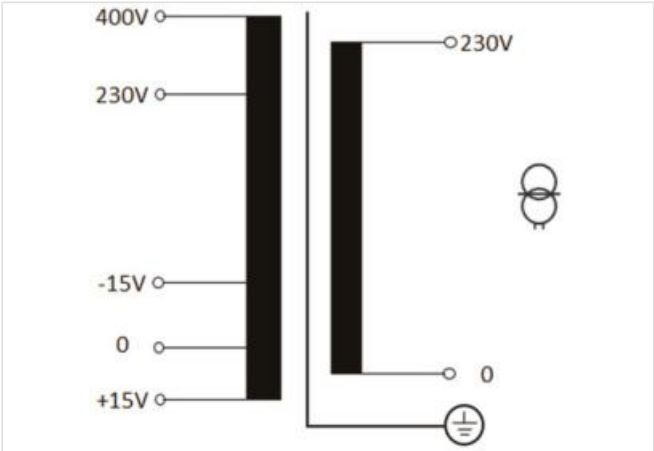

Electrical data Supply	
Power frequency	50/60 Hz
Electrical data Input	
Input voltage 1 AC	230 V
Input voltage 2 AC	400 V
Input current at input voltage 1 AC	0,33 A
Input current at input voltage 2 AC	0,19 A
Inrush current at input voltage 1	6,1 A
Inrush current at input voltage 2	3,5 A

Short-circuit current at input voltage 1	4,1 A
--	-------

Short-circuit current at input voltage 2	2,4 A
--	-------

Electrical data | Output

Output voltage AC	230 V
-------------------	-------

Mechanical data | Mounting data

Mounting method	screwed
-----------------	---------

Suitable for mounting type	Schlüssellochaufhängung
----------------------------	-------------------------

Mounting dimension a	56 mm
----------------------	-------

Mounting dimension b	56 mm
----------------------	-------

Mounting dimension c	2,4 mm
----------------------	--------

Height	79 mm
--------	-------

Width	78 mm
-------	-------

Depth	91 mm
-------	-------

Diameter bore	2,4 mm
---------------	--------

Length bore	6,6 mm
-------------	--------

Environmental characteristics | Climatic

Ambient temperature min.	-20 °C
--------------------------	--------

Ambient temperature max.	50 °C
--------------------------	-------

Storage temperature min.	-30 °C
--------------------------	--------

Storage temperature max.	80 °C
--------------------------	-------

Conformity

Product standard	EN 61558-1, EN 61558-2-4, EN 62041
------------------	------------------------------------

EMC	2014/30/EU
-----	------------

Commerciële gegevens

Douane tarief nummer	85043180
----------------------	----------

GTIN	4065909080771
------	---------------

Verpakkingseenheid	1
--------------------	---