

M12-DISTRIBUTOR BOX 8-WAY, 5-POLE WITHOUT LED

MVC8-UE10.0-XA 10m PVC-CNOMO-cable 16x0,34/3x1


8-way, 5-pole  
PVC (CNOMO)  
10.0 m  
without LED, up to 125 V AC/DC  
Further cable lengths on request.

Link naar het product

Afbeelding



Product van afwijken van afbeelding

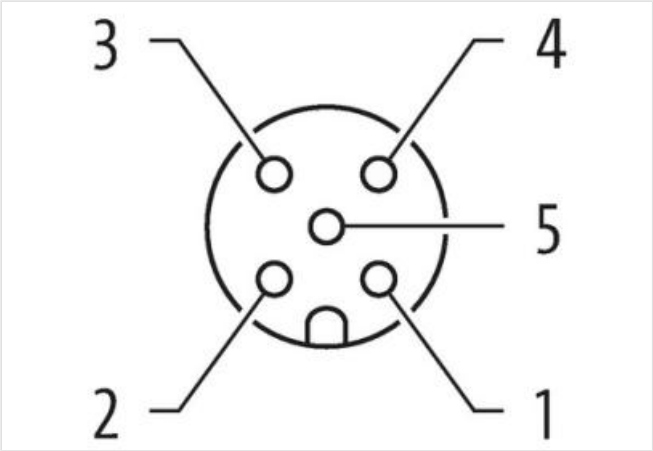

Commerciële gegevens

|                      |               |
|----------------------|---------------|
| ECLASS-6.0           | 27279219      |
| ECLASS-7.0           | 27279219      |
| ECLASS-8.0           | 27279219      |
| ECLASS-9.0           | 27440108      |
| ETIM-5.0             | EC002585      |
| Douane tarief nummer | 85444290      |
| GTIN                 | 4048879062299 |
| Verpakkingseenheid   | 1             |

Electrical data | Supply

|                                    |      |
|------------------------------------|------|
| Operating voltage DC               | 24 V |
| Current operating per contact max. | 4 A  |
| Total current max.                 | 10 A |

Industrial communication

|                            |   |
|----------------------------|---|
| Number of signals per port | 2 |
|----------------------------|---|

Installation | Connection

|              |         |
|--------------|---------|
| Mounting set | M12 x 1 |
|--------------|---------|

Device protection | Electrical

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP67              |
| Additional condition protection degree | inserted, screwed |

Mechanical data | Mounting data

|                 |                |
|-----------------|----------------|
| Mounting method | Schraubgewinde |
| Height          | 127 mm         |

|       |       |
|-------|-------|
| Width | 54 mm |
| Depth | 29 mm |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 80 °C  |

**Connection type 2**

|                          |                |
|--------------------------|----------------|
| Family construction form | free cable end |
| No. of poles             | 19             |
| Family construction form | M12            |
| Gender                   | female         |
| Color contact carrier    | black          |
| Coding                   | A              |
| No. of poles             | 5              |
| PIN 1                    | +              |
| PIN 3                    | -              |
| PIN 5                    | PE             |