
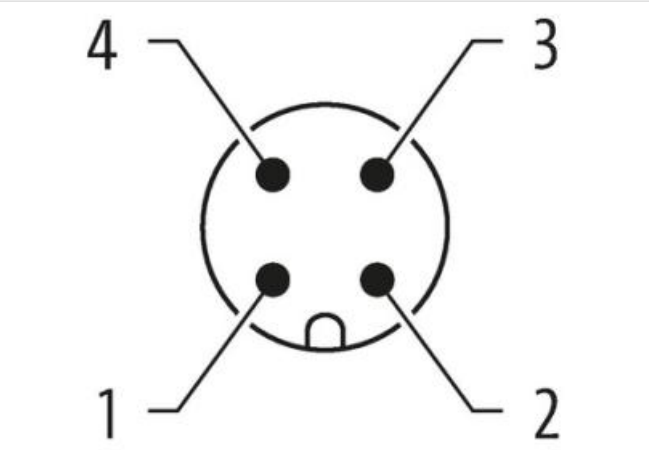
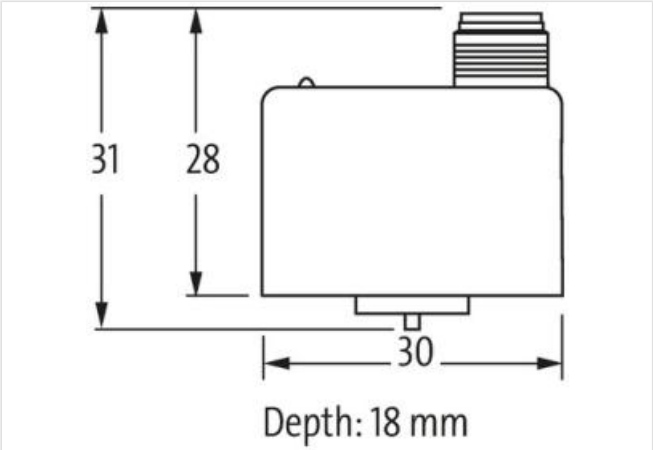


MSDD-AU7AB 1LED DIREKTANSCHL.F.M.-VENTIL

24 V AC/DC $\pm 25\%$
LED and suppressor diode
4-pole
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link naar het product](#)

Afbeelding

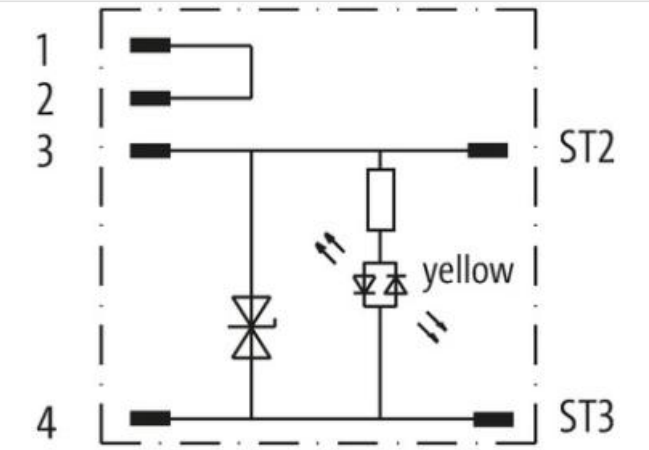

Product van afwijken van afbeelding

Commerciële gegevens	
ECLASS-6.0	27143423
ECLASS-7.0	27449001
ECLASS-8.0	27449001
ECLASS-9.0	27440321
ETIM-5.0	EC001855
Douane tarief nummer	85366990
GTIN	4048879238052
Verpakkingseenheid	50
Electrical data Supply	
Operating voltage AC	24 V
Operating voltage AC min.	18 V

Operating voltage AC max.	30 V
Operating voltage DC	24 V
Operating voltage DC min.	18 V
Operating voltage DC max.	30 V
Current operating per contact max.	4 A

Diagnostics

Status indication LED	yellow
-----------------------	--------

Installation | Connection

Tightening torque	0,6 Nm
Mounting set	M12 x 1

Installation | Pin assignment

No. of poles	2 + PE
--------------	--------

Device protection | Electrical

Additional suppressor	Suppressor diode
-----------------------	------------------

Mechanical data | Mounting data

Mounting method	inserted, screwed
-----------------	-------------------

Environmental characteristics | Climatic

Operating temperature min.	-25 °C
Operating temperature max.	85 °C

Important installation notes

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.