



MTS SINGLE-PHASE CONTROL AND ISOLATION TRANSFORMER

P:250VA IN:400VAC±5% OUT:24VAC/230VAC

Single-phase - Control and Isolation Transformers
250 VA
Isolation class T 40/B

[Link naar het product](#)

Afbeelding

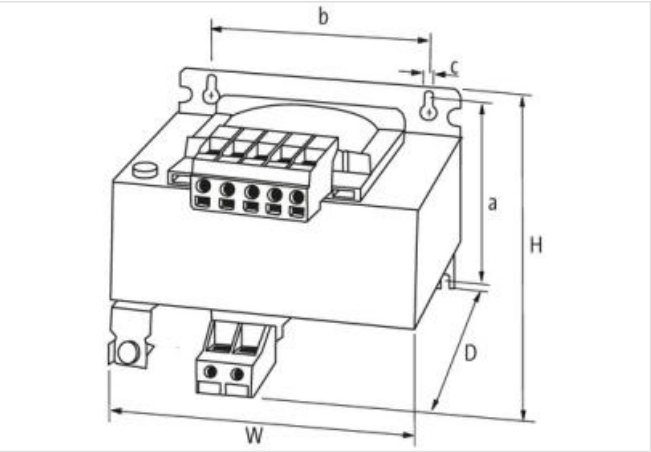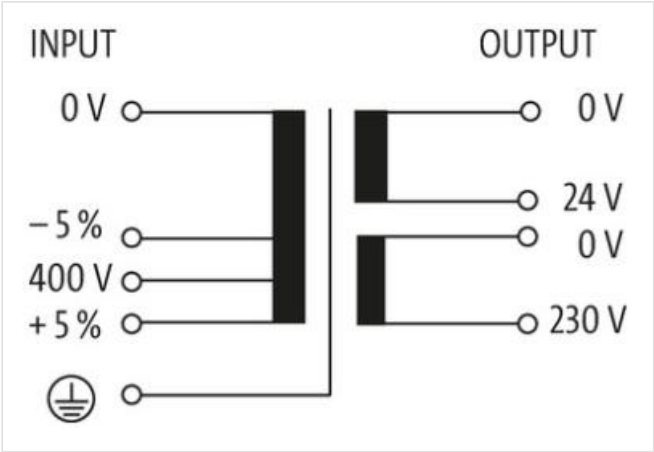

Product van afwijken van afbeelding



Commerciële gegevens	
ECLASS-6.0	27031202
ECLASS-6.1	27031302
ECLASS-7.0	27031302
ECLASS-8.0	27031302
ECLASS-9.0	27031302
ECLASS-10.1	27031302
ECLASS-11.1	27031302

ECLASS-12.0 27031302

ETIM-5.0 EC002485

Douane tarief nummer 85043180

GTIN 4048879307161

Verpakkingseenheid 1

Electrical data | Supply

Power frequency 50 ... 60 Hz

Electrical data | Input

Input voltage AC 400 V

Input voltage AC min. 380 V

Input voltage AC max. 420 V

Current input AC 0,74 A

Max. inrush current 9,1 A

Short-circuit current 13,2 A

Electrical data | Output

Output voltage AC 1 24 V

Output voltage AC 2 230 V

Output voltage adjustable no

Power rating AC max. 250 VA

Device protection | Electrical

Insulation test voltage input - output 5,8 kV

Mechanical data | Mounting data

Mounting method screwed

Mounting dimension a 86,5 mm

Mounting dimension b 84 mm

Mounting dimension c 4,8 mm

Height 104 mm

Width 97 mm

Depth 108 mm

Diameter bore 4,8 mm

Length bore 8,4 mm

Environmental characteristics | Climatic

Operating temperature min. -20 °C

Operating temperature max. 40 °C

Storage temperature min. -40 °C

Storage temperature max. 80 °C

Conformity

Product standard EN 61558-2-4, EN 61558-2-6, EN 62041 category 0

Connection type 3

Connection type 1 Input

Connection type 2 Output

Connection Screw terminals SK

Family construction form terminal

Gender female

No. of poles 4

PIN 1 + 5%

PIN 3 - 5%

PIN 4 400 V

Connection Screw terminals SK

Family construction form terminal

Gender female

No. of poles	4
PIN 2	24 V DC
PIN 4	230 V
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	metallic
No. of poles	1
PIN 1	PE