


Cube67 I/O Cable-Module, I/O Extension Module

DI16/DO16, Open-End, 5m

Expansion module  
With open ended wires  
Connection cables are in the online shop under "Connection Technology".  
Housing fully potted.

Link naar het product

Afbeelding

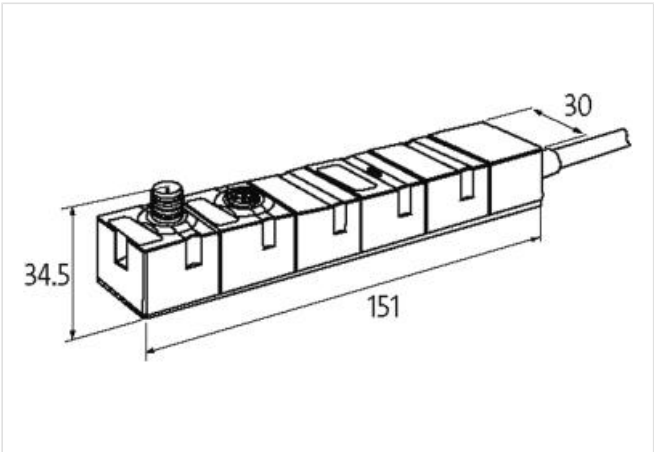

Product van afwijken van afbeelding



| Commerciële gegevens     |               |
|--------------------------|---------------|
| ECLASS-6.0               | 27242604      |
| ECLASS-6.1               | 27242604      |
| ECLASS-7.0               | 27242604      |
| ECLASS-8.0               | 27242604      |
| ECLASS-9.0               | 27242604      |
| ECLASS-10.1              | 27242604      |
| ECLASS-11.1              | 27242604      |
| ECLASS-12.0              | 27242604      |
| ETIM-5.0                 | EC001599      |
| Douane tarief nummer     | 85444290      |
| GTIN                     | 4048879413152 |
| Verpakkingseenheid       | 1             |
| Electrical data   Supply |               |
| Norm operating voltage   | EN 61131-2    |
| Operating voltage US DC  | 24 V          |
| Operating voltage UA DC  | 24 V          |
| Current consumption max. | 50 mA         |
| Total current UA max.    | 4 A           |
| Total current US max.    | 4 A           |
| Electrical data   Input  |               |

|                                                 |                                                |
|-------------------------------------------------|------------------------------------------------|
| Type input                                      | PNP, for 3-wire sensors or mechanical switches |
| Input filter time                               | 1 ms                                           |
| Current carrying capacity max.                  | 0,2 A                                          |
| <b>Electrical data   Output</b>                 |                                                |
| Overload resistant                              | yes                                            |
| Short-circuit protected                         | yes                                            |
| Output current per pin max.                     | 0,5 A                                          |
| <b>Diagnostics</b>                              |                                                |
| Actuator warning                                | per channel via BUS                            |
| Diagnostic                                      | No voltage, Under voltage                      |
| Diagnostic via BUS                              | per module and channel                         |
| Diagnostic via LED                              | per module                                     |
| Short circuit diagnosis                         | yes                                            |
| LED display                                     | Ethernet connection/data traffic               |
| Overload diagnosis                              | yes                                            |
| <b>Device protection   Electrical</b>           |                                                |
| Degree of protection (EN IEC 60529)             | IP67                                           |
| <b>Mechanical data   Mounting data</b>          |                                                |
| Suitable for mounting type                      | 2-hole screw mounting                          |
| Height                                          | 150 mm                                         |
| Width                                           | 30 mm                                          |
| Depth                                           | 34,5 mm                                        |
| <b>Environmental characteristics   Climatic</b> |                                                |
| Operating temperature min.                      | 0 °C                                           |
| Operating temperature max.                      | 55 °C                                          |
| Storage temperature min.                        | -20 °C                                         |
| Storage temperature max.                        | 75 °C                                          |
| <b>Connection type 3</b>                        |                                                |
| Connection type 1                               | Bus In                                         |
| Connection type 2                               | Bus Out                                        |
| Connection type 3                               | Data                                           |
| Family construction form                        | M12                                            |
| Gender                                          | male                                           |
| Color contact carrier                           | black                                          |
| Coding                                          | A                                              |
| No. of poles                                    | 6                                              |
| PIN 1                                           | 24 V DC (UA)                                   |
| PIN 2                                           | 24 V DC (US)                                   |
| PIN 3                                           | 0 V                                            |
| PIN 4                                           | Bus internal                                   |
| PIN 5                                           | Bus internal                                   |
| PIN 6                                           | 0 V                                            |
| Family construction form                        | M12                                            |
| Gender                                          | female                                         |
| Color contact carrier                           | black                                          |
| Coding                                          | A                                              |
| No. of poles                                    | 6                                              |
| PIN 1                                           | 24 V DC (UA)                                   |
| PIN 2                                           | 24 V DC (US)                                   |
| PIN 3                                           | 0 V                                            |
| PIN 4                                           | Bus internal                                   |

|                          |                |
|--------------------------|----------------|
| PIN 5                    | Bus internal   |
| PIN 6                    | 0 V            |
| Family construction form | free cable end |
| Color contact carrier    | gray           |
| No. of poles             | 36             |
| PIN 1                    | Out 1          |
| PIN 2                    | Out 2          |
| PIN 3                    | Out 3          |
| PIN 4                    | Out 4          |
| PIN 5                    | Out 5          |
| PIN 6                    | Out 6          |
| PIN 7                    | Out 7          |
| PIN 8                    | Out 8          |
| PIN 9                    | Out 9          |
| PIN 10                   | Out 10         |
| PIN 11                   | Out 11         |
| PIN 12                   | Out 12         |
| PIN 13                   | Out 13         |
| PIN 14                   | Out 14         |
| PIN 15                   | Out 15         |
| PIN 16                   | Out 16         |
| PIN 17                   | In 1           |
| PIN 18                   | In 2           |
| PIN 19                   | In 3           |
| PIN 20                   | In 4           |
| PIN 21                   | In 5           |
| PIN 22                   | In 6           |
| PIN 23                   | In 7           |
| PIN 24                   | In 8           |
| PIN 25                   | In 9           |
| PIN 26                   | In 10          |
| PIN 27                   | In 11          |
| PIN 28                   | In 12          |
| PIN 29                   | In 13          |
| PIN 30                   | In 14          |
| PIN 31                   | In 15          |
| PIN 32                   | In 16          |
| PIN 33                   | 0 V            |
| PIN 34                   | 0 V            |
| PIN 35                   | 0 V            |
| PIN 36                   | 24 V DC Sensor |