



Modlight Illumix Classic Line 24W



RGBW-LED Maschinenleuchte, IP67, 24VDC, M12 Anschluss

Modlight Illumix Classic Line
24 W

[Link naar het product](#)

Afbeelding

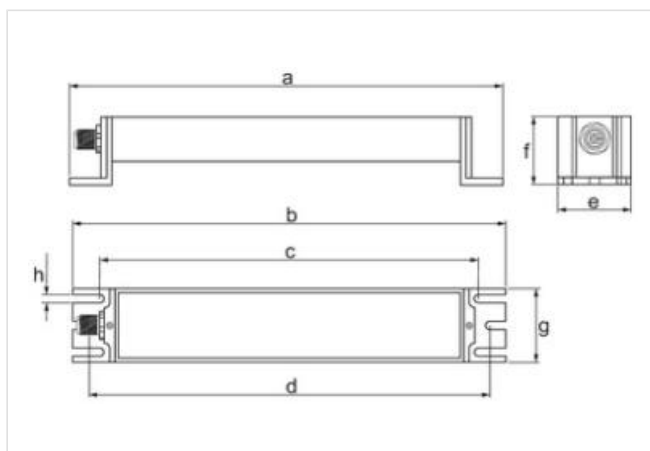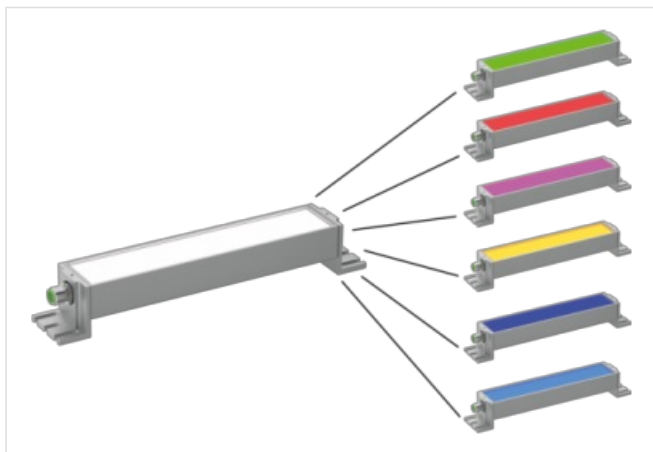

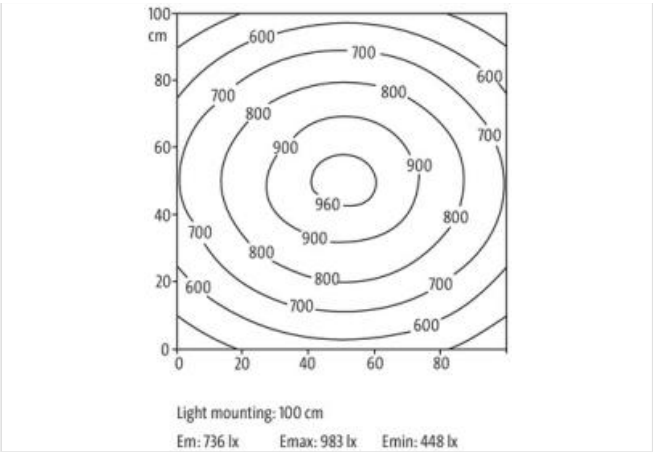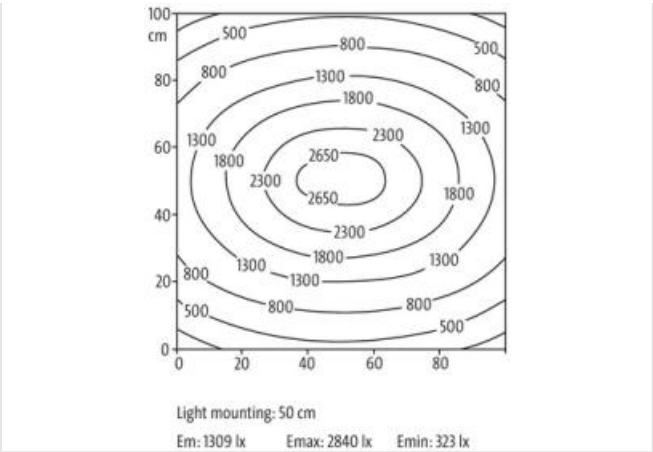

Product van afwijken van afbeelding



General product information

URI manufacturer	https://www.murrelektronik.com/
URI product	https://shop.murrelektronik.com/4000-75801-1416024

Commerciële gegevens

ECLASS-6.0	27110306
ECLASS-6.1	27110390
ECLASS-7.0	27110390
ECLASS-8.0	27110390
ECLASS-9.0	27110345
ECLASS-10.1	27110345
ECLASS-11.1	27110345
ECLASS-12.0	27110345
ETIM-5.0	EC000348
Douane tarief nummer	94054239
GTIN	4065909086834
Verpakkingseenheid	1

Electrical data | Supply

Operating voltage DC	24 V
Operating voltage DC min.	21,6 V
Operating voltage DC max.	27,6 V
Power consumption max.	39,6 W
Power consumption illumination white	24 W
Power consumption red	14,4 W
Power consumption green	10,8 W
	14,4 W

HMI | Illumination properties

LED service life L70 min.	52000 h
Energy efficiency class (EU 2019/2015)	D
Number of light sources	4
Radiation angle min.	120 °
Luminous temperature	5700 K
Color reproduction (Ra) min.	80

Luminous efficacy	147 lm/W
Light color	daylight white
Luminous flux illumination white	3524 lm
Luminous flux red	880 lm
Luminous flux green	1368 lm
Luminous flux blue	516 lm

Installation | Connection

Family construction form	M12
Gender	male

Installation | Pin assignment

Coding	A
No. of poles	5

Device protection | Electrical

Installation height max. ASL	2000 m
Degree of protection (EN IEC 60529)	IP67
Protection class (EN IEC 61140)	III

Device protection | Mechanical

Shock resistance (EN IEC 60068-2-27)	50 g, 11 ms
Vibration resistance (EN IEC 60068-2-6)	10 mm (2 ... 9 Hz), 3 g (9 ... 200 Hz)

Mechanical data | Material data

Coating housing	eloxiert
Material housing	Aluminium
Material light cover	diffuse single-pane safety glass (ESG)
Thickness material light cover	4 mm

Mechanical data | Mounting data

Net weight	1270 g
Height	40 mm
Width	760 mm
Depth	37 mm
Screw head diameter max.	7,2 mm
Screw head thread max.	M4

Environmental characteristics | Climatic

Operating temperature min.	-30 °C
Operating temperature max.	50 °C
Storage temperature min.	-30 °C
Storage temperature max.	50 °C
Relative humidity min. (operation)	5 %
Relative humidity max. (operation)	95 %

Environmental product conformity

REACH	compliant
RoHS	2011/65/EU

Conformity

CE	2014/30/EU
UKCA	Electromagnetic Compatibility Regulations 2016, The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012

Approvals

UL	E473165, UL2108 IFDR
ULc	E473165, CSA C22.2 No.250.0 IFDR7