

Modlight70 Pro connecting modul 8 pole M12

side, Input 24VDC


Basic
Outlet on the side
with M12 connection
Connection cables are in the online shop under "Connection Technology".

Link naar het product

Afbeelding



Product van afwijken van afbeelding

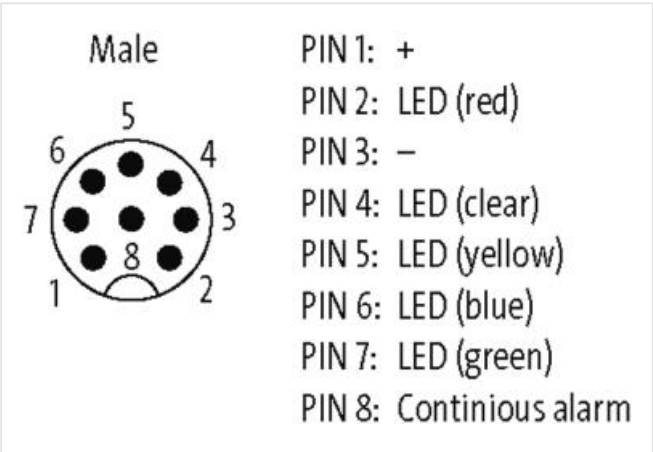

Commerciële gegevens	
ECLASS-6.0	27371232
ECLASS-6.1	27371232
ECLASS-7.0	27371232
ECLASS-8.0	27371232
ECLASS-9.0	27371232
ECLASS-10.1	27371232
ECLASS-11.1	27371232
ECLASS-12.0	27371232
ETIM-5.0	EC001152
ETIM-6.0	EC001152
ETIM-7.0	EC001152
Douane tarief nummer	85319000
GTIN	4048879758895
Verpakkingseenheid	1
Electrical data Supply	
Operating voltage DC	24 V
Operating voltage DC min.	21,6 V
Operating voltage DC max.	26,4 V
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP65

Additional condition protection degree inserted, locked

Mechanical data | Material data

Color housing black

Material housing Plastic

Mechanical data | Mounting data

Height 122 mm

Width 88 mm

Depth 70 mm

Environmental characteristics | Climatic

Operating temperature min. -30 °C

Operating temperature max. 60 °C

Connection type 2

Family construction form M12

Gender male

Coding A

No. of poles 8

PIN 1 24 V DC / 0 V

PIN 2 LED-Modul RD

PIN 3 0 V / 24 V DC

PIN 4 LED-Modul CL

PIN 5 LED-Modul YE

PIN 6 LED-Modul BU

PIN 7 LED-Modul GN

PIN 8 Buzzer

Mounting method bayonet-locking