



M12 female 0° A-cod. IDC

4-pol., 0.5 - 1.0mm², 5,5 - 8mm

Female straight  
M12, 4-pole  
IDC terminals  
Connection cross section: 0.5...1.0 mm²  
Art-No. 7005 - M12 Lite - (plastic hexagonal screw) on request  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link naar het product

Afbeelding

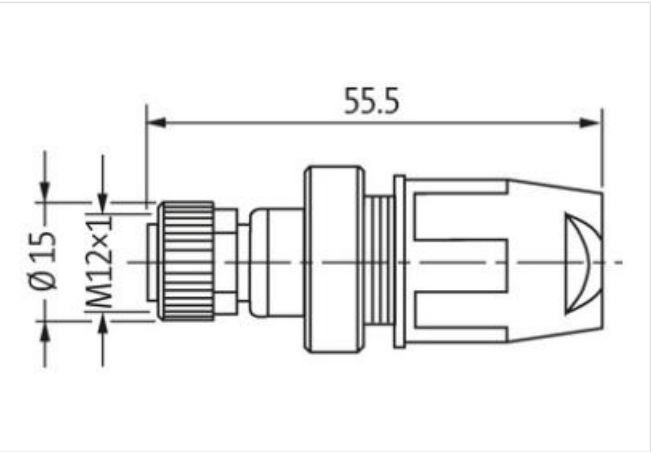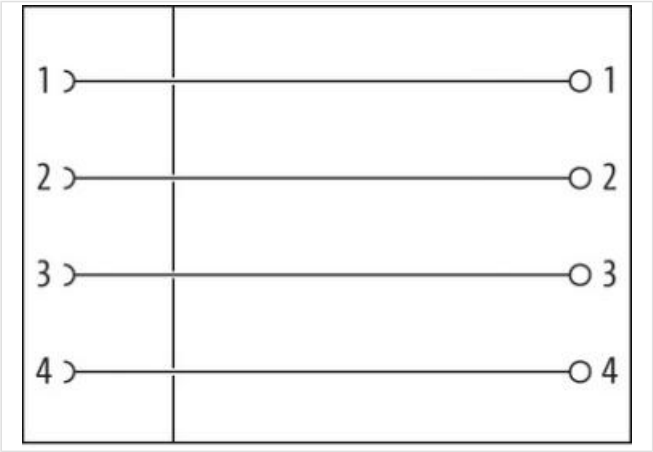

Product van afwijken van afbeelding

| Side 1                              |          |
|-------------------------------------|----------|
| Family construction form            | M12      |
| Degree of protection (EN IEC 60529) | IP67     |
| Commerciële gegevens                |          |
| ECLASS-6.0                          | 27279221 |
| ECLASS-7.0                          | 27440104 |
| ECLASS-8.0                          | 27440104 |
| ECLASS-9.0                          | 27440102 |

|                      |               |
|----------------------|---------------|
| ECLASS-10.1          | 27440102      |
| ECLASS-11.1          | 27440102      |
| ECLASS-12.0          | 27440116      |
| ETIM-5.0             | EC002635      |
| Douane tarief nummer | 85366990      |
| GTIN                 | 4048879201711 |
| Verpakkingseenheid   | 1             |

**Electrical data | Supply**

|                                    |      |
|------------------------------------|------|
| Operating voltage AC max.          | 32 V |
| Operating voltage DC max.          | 32 V |
| Current operating per contact max. | 4 A  |

**Installation**

|                               |                     |
|-------------------------------|---------------------|
| Connection cross section min. | 0,5 mm <sup>2</sup> |
| Connection cross section max. | 1 mm <sup>2</sup>   |
| Single wire diameter min.     | 0,1 mm              |

**Installation | Connection**

|                               |        |
|-------------------------------|--------|
| Wire insulation diameter min. | 1,6 mm |
| Wire insulation diameter max. | 2 mm   |
| Tightening torque             | 0,6 Nm |

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Additional condition protection degree | inserted, screwed |
| Rated surge voltage                    | 0,8 kV            |
| Material group (IEC 60664-1)           | III               |

**Mechanical data | Mounting data**

|                     |                                       |
|---------------------|---------------------------------------|
| Mounting method     | inserted, screwed, Shaking protection |
| Clamping range min. | 5,5 mm                                |
| Clamping range max. | 8 mm                                  |
| Height              | 55 mm                                 |
| Width               | 22 mm                                 |
| Depth               | 22 mm                                 |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C  |

**Important installation notes**

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |