

SVS VALVE PLUG FORM B 10 MM FIELD-WIREABLE




110V LED+VDR PG9

Form B (10 mm)
110 V AC/DC ±10%
LED and VDR
PG9

Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link naar het product](#)

Afbeelding

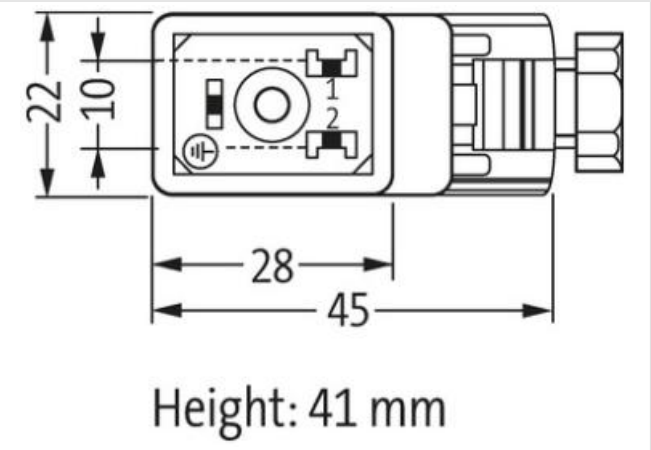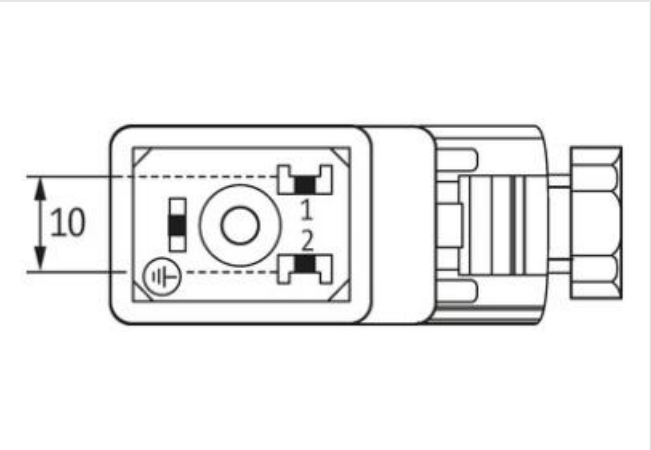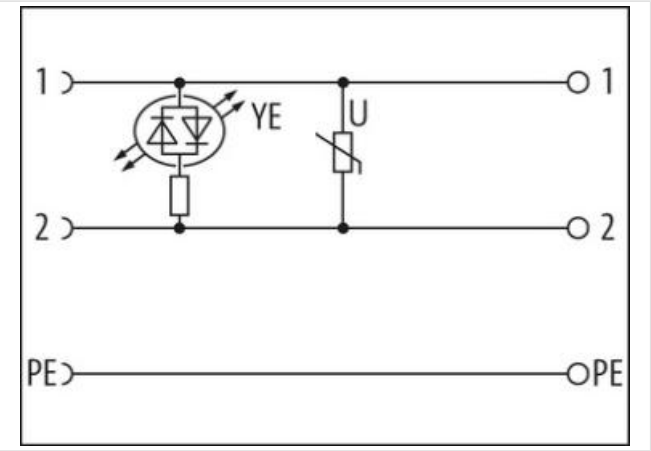

Product van afwijken van afbeelding

Side 1

Degree of protection (EN IEC 60529) IP65

Commerciële gegevens

ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ETIM-5.0	EC002062
Douane tarief nummer	85366990

GTIN 4048879187282

Verpakkingseenheid 1

Electrical data

Capacity CX 10 ms

Holding power max. 100 W

Electrical data | Supply

Operating voltage AC 110 V

Operating voltage AC min. 99 V

Operating voltage AC max. 121 V

Operating voltage DC 110 V

Operating voltage DC min. 99 V

Operating voltage DC max. 121 V

Cut-off peak voltage max. 250 V

Current operating per contact max. 1 A

Current consumption max. 12 mA

Diagnostics

Status indication LED yellow

Installation

Connection cross section max. 1,5 mm²

Installation | Connection

Tightening torque 0,4 Nm

Mounting set M3

Device protection | Electrical

Additional condition protection degree inserted, locked, with screw connection

Mechanical data | Mounting data

Mounting method PG9

Clamping range min. 6 mm

Clamping range max. 8 mm

Environmental characteristics | Climatic

Operating temperature min. -20 °C

Operating temperature max. 60 °C