




SVS VALVE PLUG FORM B 10 MM FIELD-WIREABLE

230V LED+VDR M16x1.5

Form B (10 mm)  
230 V AC/DC  $\pm 10\%$   
LED and VDR  
metric  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link naar het product](#)

Afbeelding

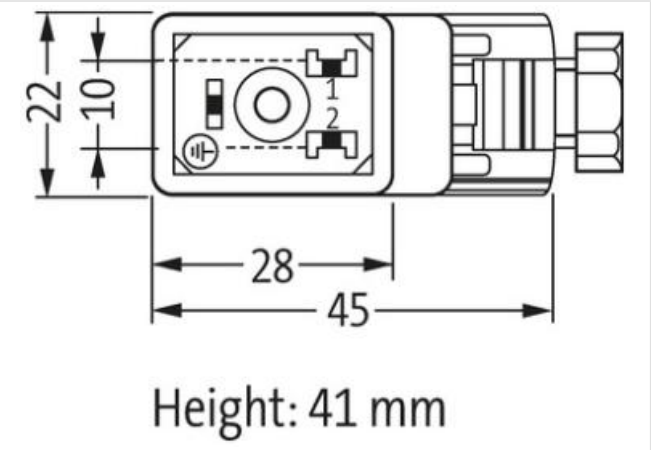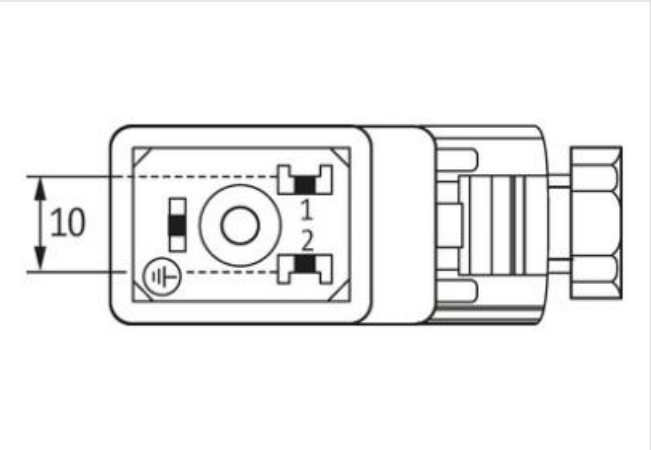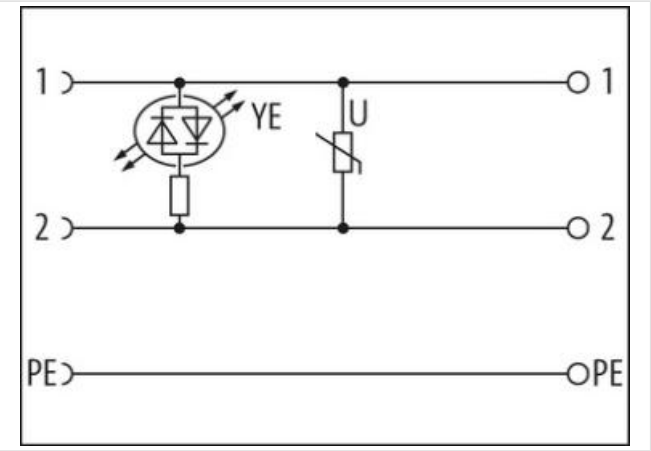

Product van afwijken van afbeelding

Side 1

Degree of protection (EN IEC 60529) IP65

Commerciële gegevens

|                      |          |
|----------------------|----------|
| ECLASS-6.0           | 27279221 |
| ECLASS-7.0           | 27440104 |
| ECLASS-8.0           | 27440104 |
| ECLASS-9.0           | 27440102 |
| ETIM-5.0             | EC002062 |
| Douane tarief nummer | 85366990 |

GTIN 4048879187275

Verpakkingseenheid 1

#### Electrical data

Capacity CX 15 ms

Holding power max. 100 W

#### Electrical data | Supply

Operating voltage AC 230 V

Operating voltage AC min. 207 V

Operating voltage AC max. 253 V

Operating voltage DC 230 V

Operating voltage DC min. 207 V

Operating voltage DC max. 253 V

Cut-off peak voltage max. 450 V

Current operating per contact max. 1 A

Current consumption max. 12 mA

#### Diagnostics

Status indication LED yellow

#### Installation

Connection cross section max. 1,5 mm<sup>2</sup>

#### Installation | Connection

Tightening torque 0,4 Nm

Mounting set M16 x 1.5

#### Device protection | Electrical

Additional condition protection degree inserted, locked, with screw connection

#### Mechanical data | Mounting data

fastening screw M3

Clamping range min. 5 mm

Clamping range max. 10 mm

#### Environmental characteristics | Climatic

Operating temperature min. -20 °C

Operating temperature max. 60 °C