

SVS VALVE PLUG FORM B 10 MM FIELD-WIREABLE




230V LED+VDR PG9

Form B (10 mm)
230 V AC/DC $\pm 10\%$
LED and VDR
PG9

Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link naar het product

Afbeelding

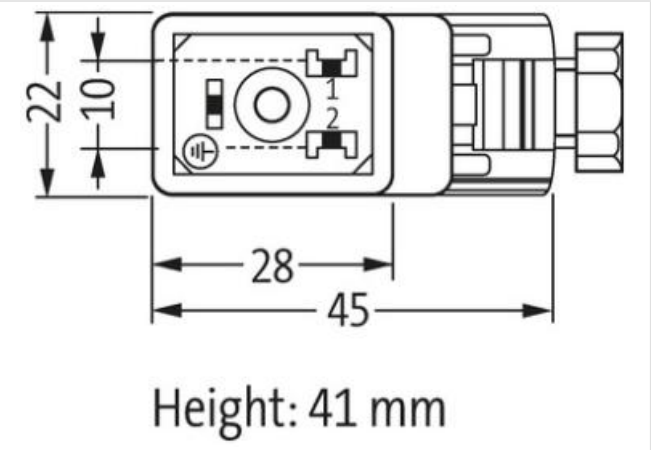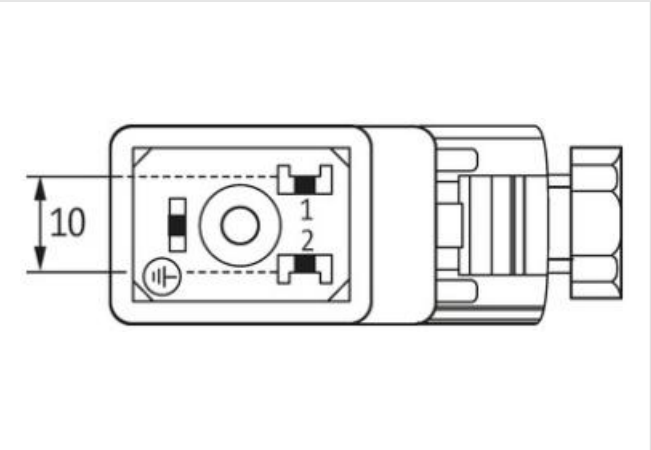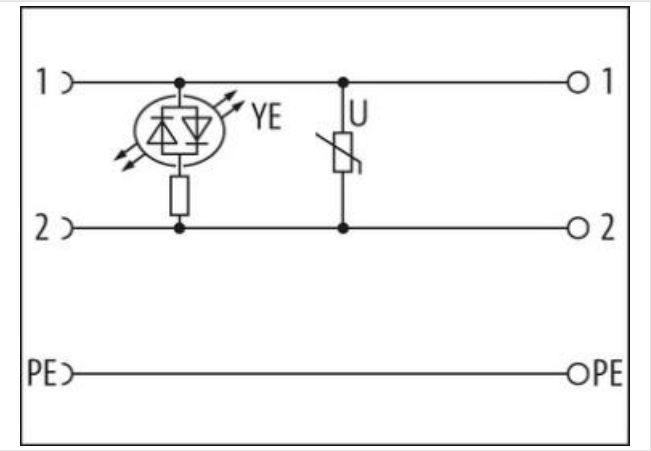

Product van afwijken van afbeelding

Side 1	
Degree of protection (EN IEC 60529)	IP65
Commerciële gegevens	
ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ETIM-5.0	EC002062
Douane tarief nummer	85366990

GTIN 4048879187251

Verpakkingseenheid 1

Electrical data

Capacity CX 15 ms

Holding power max. 100 W

Electrical data | Supply

Operating voltage AC 230 V

Operating voltage AC min. 207 V

Operating voltage AC max. 253 V

Operating voltage DC 230 V

Operating voltage DC min. 207 V

Operating voltage DC max. 253 V

Cut-off peak voltage max. 450 V

Current operating per contact max. 1 A

Current consumption max. 12 mA

Diagnostics

Status indication LED yellow

Installation

Connection cross section max. 1,5 mm²

Installation | Connection

Tightening torque 0,4 Nm

Mounting set M3

Device protection | Electrical

Additional condition protection degree inserted, locked, with screw connection

Mechanical data | Mounting data

Mounting method PG9

Clamping range min. 6 mm

Clamping range max. 8 mm

Environmental characteristics | Climatic

Operating temperature min. -20 °C

Operating temperature max. 60 °C