

M12 male 90° / M12 female 0° A-cod.

PUR 5x0.34 bk UL/CSA 0.6m

⚠ NOTICE ⚠**PRODUCT IS DISCONTINUED. PLEASE HAVE A LOOK AT THE ALTERNATIVE PRODUCTS.**

Male 90° – female straight


M12 – M12, 5-pole

Art-No. 7005 - M12 Lite - (plastic hexagonal screw) on request

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

Further cable lengths on request.

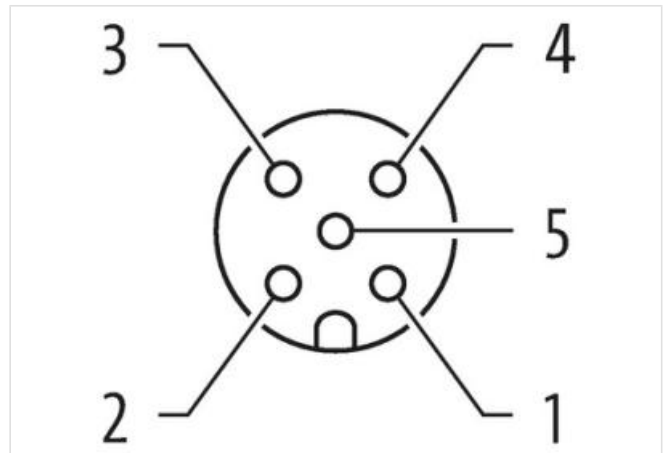[Link naar het product](#)**Afbeelding**

1	brown (+)	C 1
2	white (N/C)	C 2
4	black (N/O)	C 4
3	blue (-)	C 3
5	gn/ye (* gray)	C 5

(* for cable type 126, 732, 219, 619)

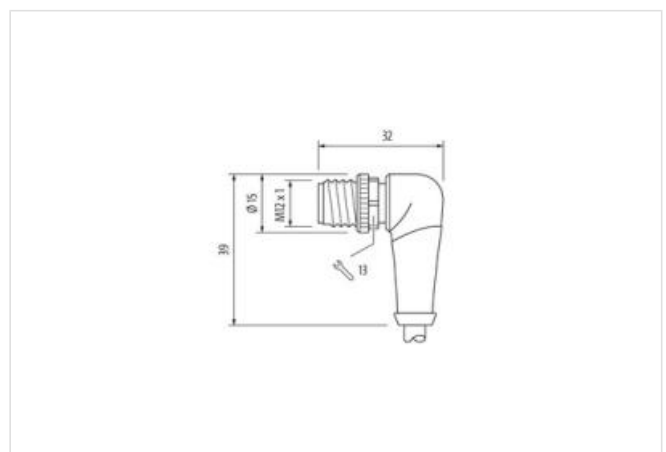



Product van afwijken van afbeelding



Cable length	0,6 m
Side 1	
Tightening torque	0,6 Nm
Mounting method	inserted, screwed
Family construction form	M12
Thread	M12 x 1
suitable for corrugated tube (internal Ø)	10 mm
Coding	A
Material	PUR
Width across flats	SW13
Degree of protection (EN IEC 60529)	IP66K, IP67
Side 2	
Tightening torque	0,6 Nm
Mounting method	inserted, screwed
Family construction form	M12
Thread	M12 x 1
suitable for corrugated tube (internal Ø)	10 mm
Coding	A
Material	PUR
Width across flats	SW13
Degree of protection (EN IEC 60529)	IP66K, IP67
Commerciële gegevens	
ECLASS-6.0	27279218
ECLASS-6.1	27279218
ECLASS-7.0	27279218
ECLASS-8.0	27279218
ECLASS-9.0	27060311
ECLASS-10.1	27060311
ECLASS-11.1	27060311
ECLASS-12.0	27060311
ETIM-5.0	EC001855
Douane tarief nummer	85444290

GTIN 4048879173711

Verpakkingseenheid 1

Electrical data | Supply

Operating voltage AC max. 125 V
 Operating voltage DC max. 125 V
 Operating voltage AC (UL-listed) 30 V
 Operating voltage DC (UL-listed) 30 V
 Current operating per contact max. 4 A

Installation | Connection

Mounting set M12 x 1

Device protection | Electrical

Additional condition protection degree inserted, screwed
 Pollution Degree 3
 Material group (IEC 60664-1) I

Mechanical data | Material data

Coating locking Nickeled
 Coating of fitting nickel plated
 Locking material Zinc die-casting
 Material screw connection Zinc die-casting

Mechanical data | Mounting data

Mounting method inserted, screwed, Shaking protection

Environmental characteristics | Climatic

Operating temperature min. -25 °C
 Operating temperature max. 85 °C
 Additional condition temperature range depending on cable quality

Cable

Cable identification 625
 Cable Type 2 (PUR/PVC)
 Approval (cable) UL (AWM-Style 20549/1731), CSA; CE conform
 Cable weight [g/m] 54,78 g
 Material wire Cu wire, bare
 Resistor (core) max. 57 Ω/km (20 °C)
 Single wire Ø (core) 0.1 mm
 Construction (core) 42× 0.1 mm (multi-strand wire class 6)
 Diameter (core) 5× 0.34 mm²
 AWG similar to AWG 22
 Material wire isolation PVC
 Material property wire insulation CFC-, cadmium-, silicone- and lead-free
 Shore hardness wire isolation 43 ±5 D
 Wire-Ø incl. isolation 1.25 mm ±5%
 Color/numbering of wires br, bk, bl, wh, gnye longitudinally striped
 Stranding combination 5 wires twisted around central filler
 Shield no
 Material jacket PUR/PVC
 Material property (jacket) CFC-, halogen-, cadmium-, silicone- and lead-free, matt, low-adhesion, machine easy to process, abrasion-resistant, hydrolysis and microbial resistant
 Shore hardness jacket 80 ±5 A (PVC-under jacket); 85 ±5 A (PUR-jacket)
 Outer-Ø (jacket) 5.0 mm ±5%
 Color jacket black
 chemical resistance good resistance to oil, gasoline and chemicals
 Nominal voltage UL 300 V AC

Test voltage	2000 V AC
Current load capacity	to DIN VDE 0298-4
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+80 °C
Bending radius (fixed)	10× outer Ø
Bending radius (dynamic)	15× outer Ø
No. of bending cycles (C-track)	max. 2 Mio. (25 °C)
Travel speed (C-track)	max. 3.3 m/s
Acceleration (C-track)	max. 5 m/s ²