



T-Coupler M12 male / M12 female A-cod.

5-pol. / 2x 5-pol.


T-coupler  
Male straight – females straight  
M12 – M12, 5-pole  
Distribution function (NO)  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link naar het product

Afbeelding

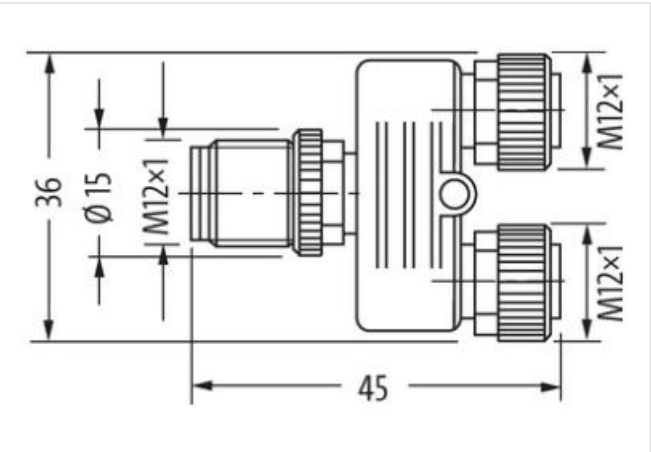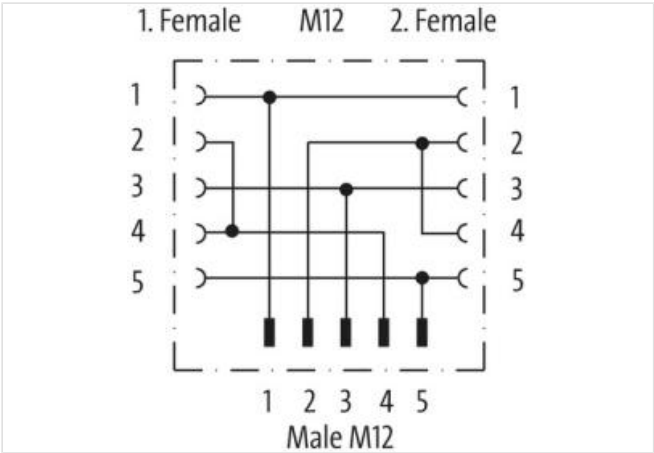

Product van afwijken van afbeelding

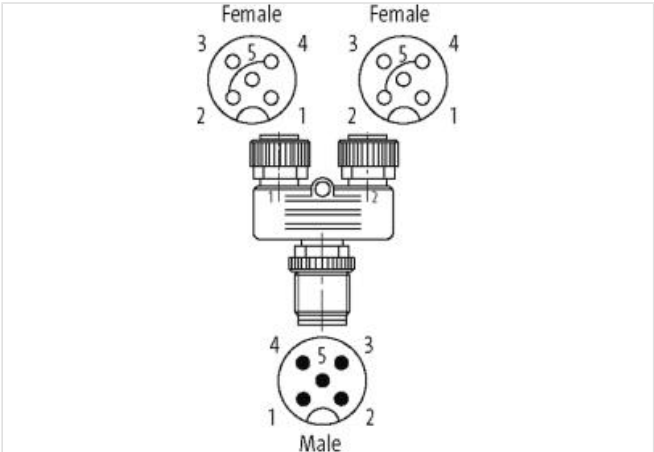

Side 1

Degree of protection (EN IEC 60529) IP67

Side 2

Degree of protection (EN IEC 60529) IP67

Commerciële gegevens

|                      |               |
|----------------------|---------------|
| ECLASS-6.0           | 27143423      |
| ECLASS-6.1           | 27279221      |
| ECLASS-7.0           | 27440104      |
| ECLASS-8.0           | 27440104      |
| ECLASS-9.0           | 27440106      |
| ECLASS-10.1          | 27440106      |
| ECLASS-11.1          | 27440106      |
| ECLASS-12.0          | 27440106      |
| ETIM-5.0             | EC002062      |
| Douane tarief nummer | 85366990      |
| GTIN                 | 4048879000840 |
| Verpakkingseenheid   | 1             |

**Electrical data | Supply**

|                                    |      |
|------------------------------------|------|
| Operating voltage AC max.          | 60 V |
| Operating voltage DC max.          | 60 V |
| Operating voltage AC (UL-listed)   | 30 V |
| Operating voltage DC (UL-listed)   | 30 V |
| Current operating per contact max. | 4 A  |

**Installation | Connection**

|                   |         |
|-------------------|---------|
| Tightening torque | 0,6 Nm  |
| Mounting set      | M12 x 1 |

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Additional condition protection degree | inserted, screwed |
| Rated surge voltage                    | 1,5 kV            |
| Material group (IEC 60664-1)           | I                 |

**Mechanical data | Material data**

|                  |                  |
|------------------|------------------|
| Coating locking  | Nickel           |
| Locking material | Zinc die-casting |

**Mechanical data | Mounting data**

|                 |                                       |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C  |