




Adaptor M12 on back A-cod/MSUD valve plug CI-9.4mm

3-pol.

Form CI (9.4 mm) – M12, connector at the rear  
24 V AC  $\pm 20\%$  / DC  $\pm 25\%$   
LED and suppression  
3-pole  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link naar het product

Afbeelding

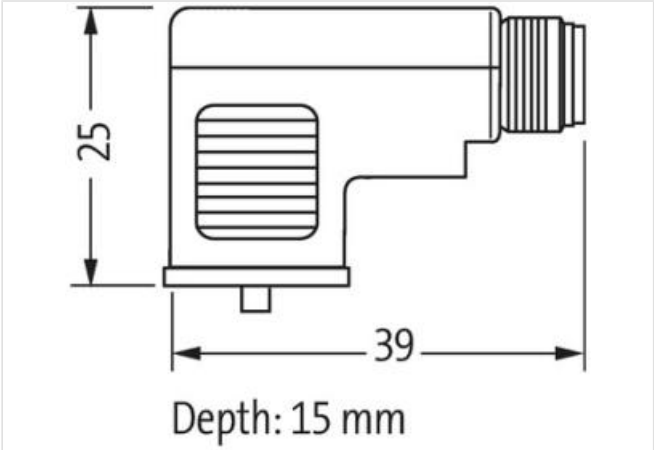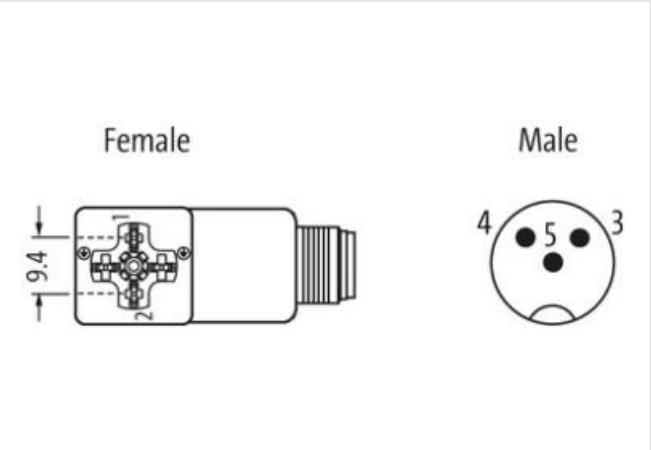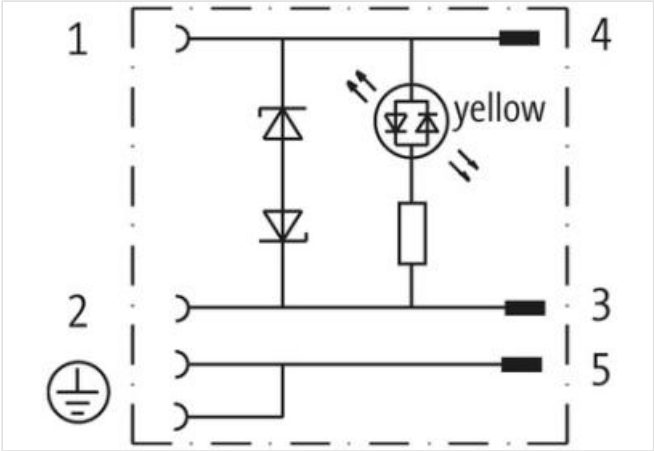

Product van afwijken van afbeelding



| Side 1                   |        |
|--------------------------|--------|
| Tightening torque        | 0,4 Nm |
| Family construction form | MSUD   |
| Side 2                   |        |
| Tightening torque        | 0,6 Nm |

|                                          |                                                                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Family construction form                 | M12                                                                                                                                                   |
| Commerciële gegevens                     |                                                                                                                                                       |
| ECLASS-6.0                               | 27143423                                                                                                                                              |
| ECLASS-6.1                               | 27279221                                                                                                                                              |
| ECLASS-7.0                               | 27440104                                                                                                                                              |
| ECLASS-8.0                               | 27440104                                                                                                                                              |
| ECLASS-9.0                               | 27440106                                                                                                                                              |
| ECLASS-10.1                              | 27440106                                                                                                                                              |
| ECLASS-11.1                              | 27440106                                                                                                                                              |
| ECLASS-12.0                              | 27440106                                                                                                                                              |
| ETIM-5.0                                 | EC001855                                                                                                                                              |
| Douane tarief nummer                     | 85366990                                                                                                                                              |
| GTIN                                     | 4048879348737                                                                                                                                         |
| Verpakkingseenheid                       | 1                                                                                                                                                     |
| Electrical data   Supply                 |                                                                                                                                                       |
| Operating voltage AC                     | 24 V                                                                                                                                                  |
| Operating voltage AC min.                | 19,2 V                                                                                                                                                |
| Operating voltage AC max.                | 28,8 V                                                                                                                                                |
| Operating voltage DC                     | 24 V                                                                                                                                                  |
| Operating voltage DC min.                | 18 V                                                                                                                                                  |
| Operating voltage DC max.                | 30 V                                                                                                                                                  |
| Cut-off peak voltage max.                | 55 V                                                                                                                                                  |
| Current operating per contact max.       | 4 A                                                                                                                                                   |
| Current consumption max.                 | 15 mA                                                                                                                                                 |
| Installation   Connection                |                                                                                                                                                       |
| Mounting set                             | M3                                                                                                                                                    |
| Installation   Pin assignment            |                                                                                                                                                       |
| No. of poles                             | 2 + PE                                                                                                                                                |
| Device protection   Electrical           |                                                                                                                                                       |
| Degree of protection (EN IEC 60529)      | IP67                                                                                                                                                  |
| Additional condition protection degree   | inserted, screwed                                                                                                                                     |
| Environmental characteristics   Climatic |                                                                                                                                                       |
| Operating temperature min.               | -25 °C                                                                                                                                                |
| Operating temperature max.               | 85 °C                                                                                                                                                 |
| Important installation notes             |                                                                                                                                                       |
| Note on strain relief                    | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius                   | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |