




Adaptor M12 male / M12 male B-cod. shielded

4-pol., Profibus

Adapter
Male - male
M12 – M12, 2-pole
B-coded
shielded

[Link naar het product](#)

Afbeelding

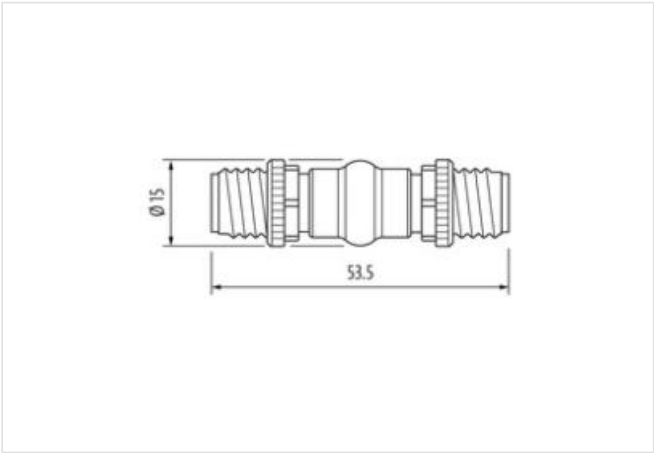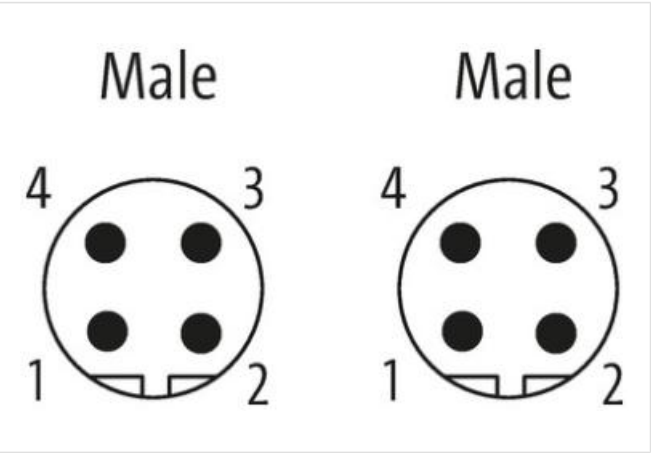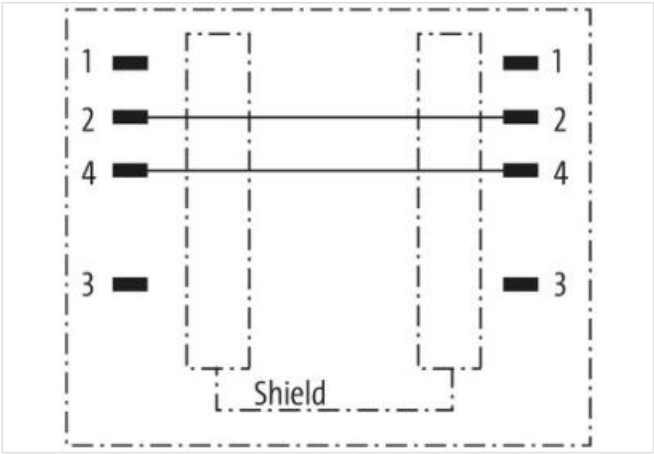

Product van afwijken van afbeelding

Commerciële gegevens	
ECLASS-6.0	27143423
ECLASS-6.1	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440106
ECLASS-10.1	27440106
ECLASS-11.1	27440106
ECLASS-12.0	27440106
ETIM-5.0	EC001855
Douane tarief nummer	85366990

GTIN	4048879317481
------	---------------

Verpakkingseenheid	1
--------------------	---

Electrical data | Supply

Operating voltage AC max.	60 V
---------------------------	------

Operating voltage DC max.	60 V
---------------------------	------

Current operating per contact max.	4 A
------------------------------------	-----

Installation | Connection

Tightening torque	0,6 Nm
-------------------	--------

Mounting set	M12 x 1
--------------	---------

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67
-------------------------------------	------

Additional condition protection degree	inserted, screwed
--	-------------------

Rated insulation voltage	800 V
--------------------------	-------

Rated surge voltage	1,5 kV
---------------------	--------

Mechanical data | Material data

Coating locking	Nickel
-----------------	--------

Material housing	PUR
------------------	-----

Locking material	Zinc die-casting
------------------	------------------

Mechanical data | Mounting data

Mounting method	inserted, screwed, Shaking protection
-----------------	---------------------------------------

Environmental characteristics | Climatic

Operating temperature min.	-25 °C
----------------------------	--------

Operating temperature max.	85 °C
----------------------------	-------

Important installation notes

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
-----------------------	---

Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
------------------------	---