

**M8 panel feed through male / female 0° A-cod.**

3-pol., shielded

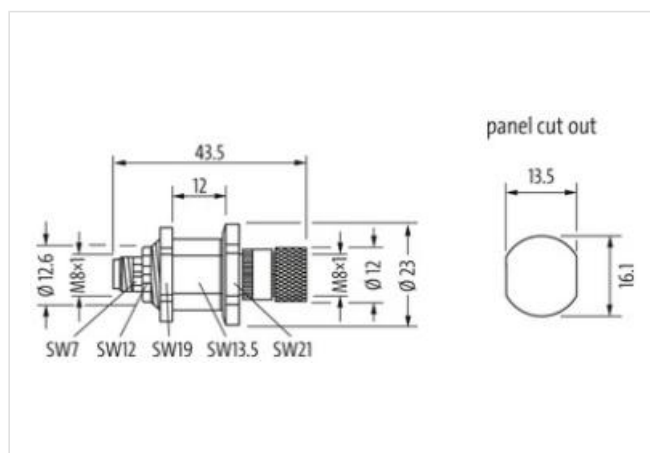
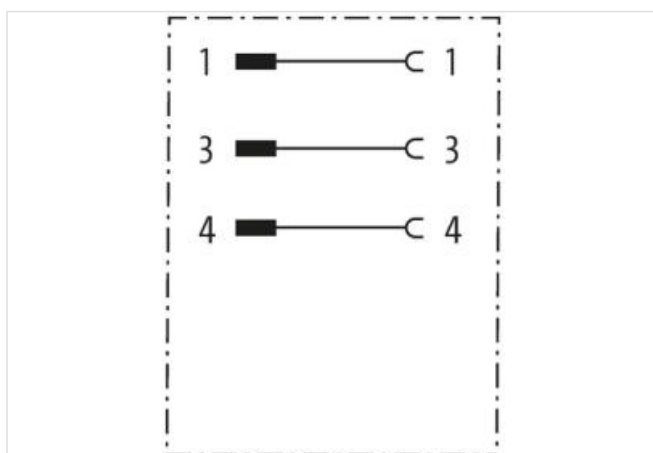
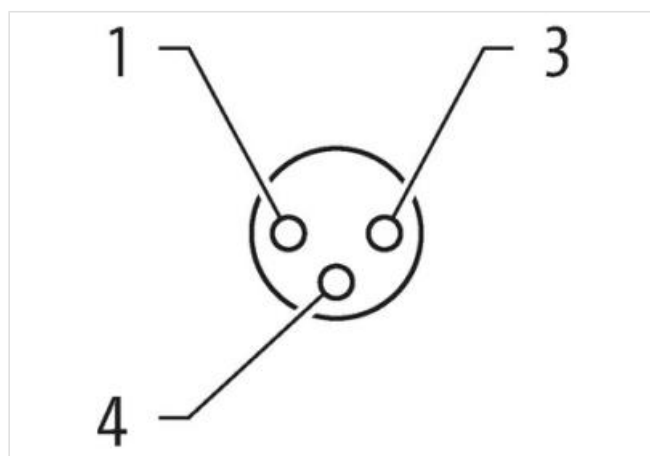
Control cabinet entry system

Male - female

M8, 3-pole

Rear mounting

shielded

[Link naar het product](#)**Afbeelding**



Product van afwijken van afbeelding

| Side 1                                 |                   |
|----------------------------------------|-------------------|
| Family construction form               | M8                |
| Material contact                       | Copper alloy      |
| No. of poles                           | 4                 |
| Commerciële gegevens                   |                   |
| ECLASS-6.0                             | 27143423          |
| ECLASS-7.0                             | 27449001          |
| ECLASS-8.0                             | 27449001          |
| ECLASS-9.0                             | 27440321          |
| ECLASS-10.1                            | 27440109          |
| ECLASS-11.1                            | 27440109          |
| ECLASS-12.0                            | 27440109          |
| ETIM-5.0                               | EC002640          |
| Douane tarief nummer                   | 85366990          |
| GTIN                                   | 4048879689298     |
| Verpakkingseenheid                     | 1                 |
| Electrical data   Supply               |                   |
| Operating voltage DC                   | 30 V              |
| Current operating per contact max.     | 4 A               |
| Diagnostics                            |                   |
| Status indication LED                  | no                |
| Installation   Connection              |                   |
| Mating cycles min.                     | 100               |
| Device protection   Electrical         |                   |
| Degree of protection (EN IEC 60529)    | IP67              |
| Additional condition protection degree | inserted, screwed |
| Pollution Degree                       | 3                 |
| Rated surge voltage                    | 2,5 kV            |
| Overvoltage category (EN 60950-1)      | II                |
| Mechanical data                        |                   |
| Contour for corrugated hose            | without           |
| Mechanical data   Material data        |                   |
| Coating contact                        | gold plated       |
| Material housing                       | Metal             |
| Material contact carrier               | PA                |

|                 |                   |
|-----------------|-------------------|
| Mounting method | inserted, screwed |
|-----------------|-------------------|

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C  |

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |