


Cable drum Ø 355mm

PVC 4x0.25 shielded gy 100m

Cable drum (100 m)  
PVC  
4× 0.25 mm², grey

Link naar het product

Afbeelding

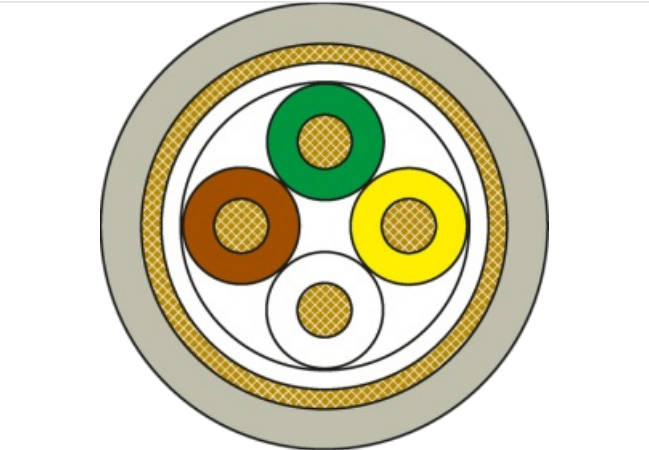

Product van afwijken van afbeelding

| Commerciële gegevens              |                             |
|-----------------------------------|-----------------------------|
| ECLASS-6.0                        | 27062011                    |
| ECLASS-6.1                        | 27061801                    |
| ECLASS-7.0                        | 27061801                    |
| ECLASS-8.0                        | 27061801                    |
| ECLASS-9.0                        | 27061801                    |
| ECLASS-10.1                       | 27061801                    |
| ECLASS-11.1                       | 27061801                    |
| ECLASS-12.0                       | 27061801                    |
| ETIM-5.0                          | EC001855                    |
| Douane tarief nummer              | 85444995                    |
| GTIN                              | 4048879495370               |
| Verpakkingseenheid                | 1                           |
| Installation   Cable              |                             |
| Cable identification              | 275                         |
| Jacket Color                      | gray                        |
| Amount stranding                  | 1                           |
| Stranding                         | 4 wires twisted             |
| Cable shielding (type)            | copper braid, tinned        |
| Cable shielding (coverage)        | 85 %                        |
| Banding                           | Foil                        |
| wire arrangement                  | brown, green, yellow, white |
| Cable weighth                     | 38,5 g/m                    |
| Material jacket                   | PVC                         |
| Outer-diameter (jacket)           | 4,6 mm                      |
| Tolerance outer diameter (sheath) | ± 5 %                       |
| Material wire insulation          | PVC                         |

|                                          |                                                      |
|------------------------------------------|------------------------------------------------------|
| Amount wires                             | 4                                                    |
| Outer diameter insulation                | 1,3 mm                                               |
| Outer diameter tolerance core insulation | ± 5 %                                                |
| Amount strands (wire)                    | 14                                                   |
| Diameter of single wires                 | 0,15 mm                                              |
| Conductor crosssection (wire)            | 0,25 mm <sup>2</sup>                                 |
| Material conductor wire                  | copper stranded wire, tinned                         |
| Conductor type (wire)                    | Strand class 5                                       |
| Nominal voltage AC max.                  | 350 V                                                |
| Current load capacity (standard)         | to DIN VDE 0298-4                                    |
| Current load capacity min. wire          | 3,6 A                                                |
| Electrical resistance line constant wire | 76 Ω/km @ 20 °C                                      |
| AC withstand voltage (wire - wire)       | 2 kV @ 60 s                                          |
| AC withstand voltage (wire - shield)     | 1,2 kV @ 60 s                                        |
| Min. operating temperature (static)      | -30 °C                                               |
| Max. operating temperature (fixed)       | 80 °C                                                |
| Operating temperature min. (dynamic)     | -5 °C                                                |
| Operating temperature max. (dynamic)     | 70 °C                                                |
| Flame resistance                         | UL 1581 § 1090   UL 1581 § 1100 FT2   IEC 60332-2-2  |
| chemical resistance                      | Good, application-related testing                    |
| Gasoline resistance                      | Good, application-related testing                    |
| Oil resistance                           | Good, application-related testing   DIN EN 60811-404 |
| Bending radius (fixed)                   | 5 x Outer diameter                                   |
| Bending radius (dynamic)                 | 20 x Outer diameter                                  |