

M12 male 0° / M12 female 0° A-cod. V4A

PVC 4x0.34 bk UL/CSA 1m

Male straight – female straight

M12 – M12, 4-pole

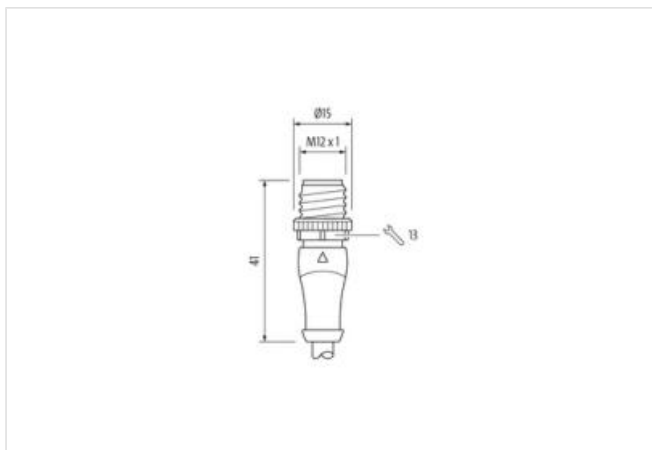
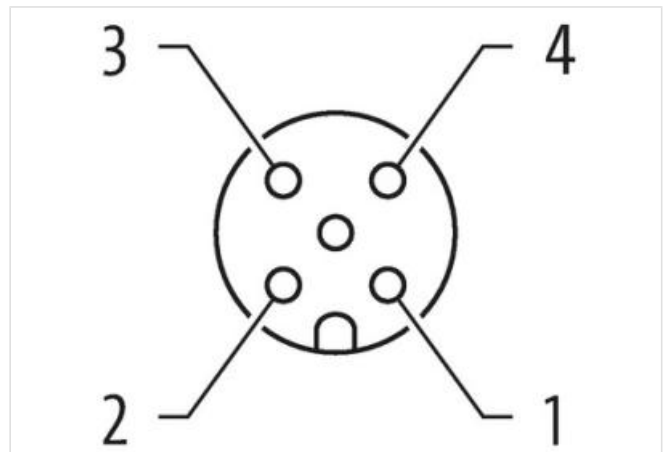
Art-No. 7005 - M12 Lite - (plastic hexagonal screw) on request

Stainless steel 1.4404 (V4A)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Further cable lengths on request.

[Link naar het product](#)**Afbeelding**



Product van afwijken van afbeelding



Cable length	1 m
Side 1	
Tightening torque	0,6 Nm
Family construction form	M12
Thread	M12 x 1
suitable for corrugated tube (internal Ø)	10 mm
Coding	A
Width across flats	SW13
Degree of protection (EN IEC 60529)	IP65, IP66K, IP67
Side 2	
Tightening torque	0,6 Nm
Family construction form	M12
Thread	M12 x 1
Coding	A
Commerciële gegevens	
ECLASS-6.0	27279218
ECLASS-6.1	27279218
ECLASS-7.0	27279218
ECLASS-8.0	27279218
ECLASS-9.0	27060311
ECLASS-10.1	27060311
ECLASS-11.1	27060311
ECLASS-12.0	27060311
ETIM-5.0	EC001855
Douane tarief nummer	85444290
GTIN	4048879513111
Verpakkingseenheid	1
Electrical data Supply	
Operating voltage AC max.	250 V
Operating voltage DC max.	250 V
Operating voltage AC (UL-listed)	30 V
Operating voltage DC (UL-listed)	30 V

Current operating per contact max. 4 A

Device protection | Electrical

Pollution Degree 3
 Rated surge voltage 2,5 kV
 Material group (IEC 60664-1) I

Mechanical data | Material data

Material housing PUR
 Locking material Stainless steel 1.4404 (V4A)

Mechanical data | Mounting data

Mounting method inserted, screwed, Shaking protection

Environmental characteristics | Climatic

Operating temperature min. -25 °C
 Operating temperature max. 85 °C
 Additional condition temperature range depending on cable quality

Conformity

Product standard DIN EN 61076-2-101 (M12)

Installation | Cable

Cable identification 614
 Cable Type 1
 Jacket Color black
 Type of Certificate cURus
 Amount stranding 1
 Stranding 4 wires twisted
 wire arrangement brown, black, blue, white
 Cable weight 40,7 g/m
 Material jacket PVC
 Shore hardness jacket 85 ± 5 Shore A
 Freedom from ingredients (jacket) lead-free, cadmium-free, CFC-free, silicone-free
 Outer-diameter (jacket) 5 mm
 Tolerance outer diameter (sheath) ± 5 %
 Material wire insulation PVC
 Amount wires 4
 Outer diameter insulation 1,25 mm
 Outer diameter tolerance core insulation ± 5 %
 Shore hardness wire insulation 45 ± 5 Shore D
 Material properties wire insulation good machinability
 Ingredient freeness wire insulation lead-free, cadmium-free, CFC-free, silicone-free
 Amount strands (wire) 19
 Diameter of single wires 0,15 mm
 Conductor crosssection (wire) 0,34 mm²
 Material conductor wire Stranded copper wire, bare
 Conductor type (wire) Strand class 5
 Current load capacity (standard) to DIN VDE 0298-4
 Current load capacity min. wire 4,8 A
 Electrical resistance line constant wire 57 Ω/km @ 20 °C
 Nominal voltage power AC max. 300 V
 Power frequency withstand voltage power (wire - jacket) 2 kV @ 60 s
 AC withstand voltage power (wire - wire) 2 kV @ 60 s
 Min. operating temperature (static) -30 °C
 Max. operating temperature (fixed) 80 °C
 Operating temperature min. (dynamic) -5 °C

Operating temperature max. (dynamic)	80 °C
UV resistance	DIN EN ISO 4892-2 A
Flame resistance	IEC 60332-2-2 UL 1581 § 1090 UL 1581 § 1100 FT2
chemical resistance	Good, application-related testing
Gasoline resistance	Good, application-related testing
Oil resistance	DIN EN 60811-404 Good, application-related testing
Bending radius (fixed)	5 x Outer diameter
Bending radius (dynamic)	10 x Outer diameter