



T-Coupler M12 male / M12 female A-cod. Lite

5-pol. / 2x 4-pol.


T-coupler
Male straight – females straight
M12 – M12, 5-pole
Distribution function (NO)
7005 - plastic hexagonal screw (M12 Lite)
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link naar het product

Afbeelding

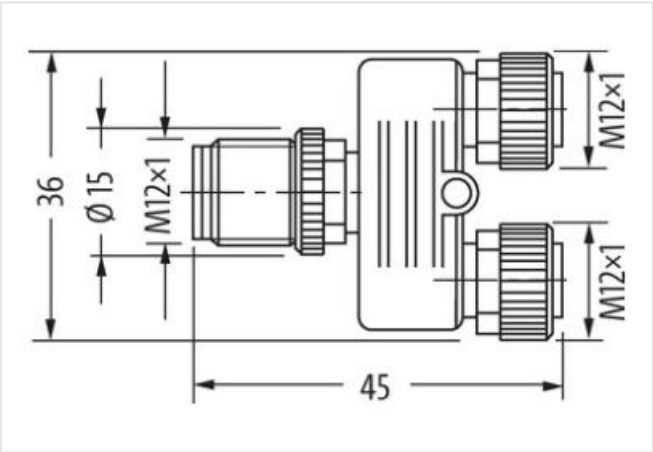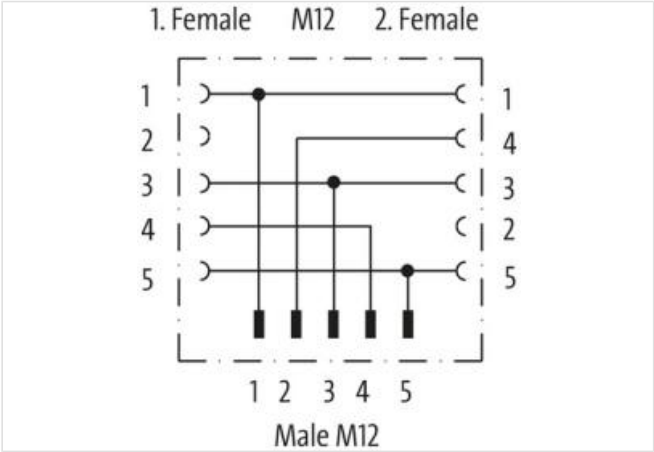

Product van afwijken van afbeelding

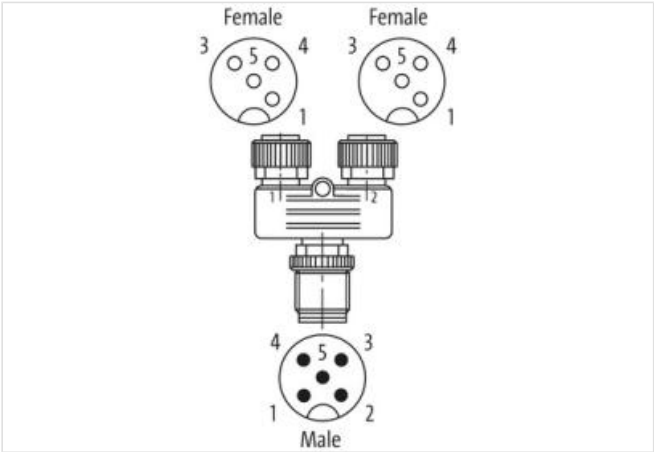

Side 1	
Family construction form	M12
Coding	A
No. of poles	5

Width across flats SW13

Side 2

Family construction form	M12
Coding	A
No. of poles	4
Width across flats	SW13

Side 3

Family construction form	M12
Coding	A
No. of poles	4

Commerciële gegevens

ECLASS-6.0	27279218
ECLASS-6.1	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440106
ECLASS-10.1	27440106
ECLASS-11.1	27440106
ECLASS-12.0	27440106
ETIM-5.0	EC002635
Douane tarief nummer	85366990
GTIN	4048879109468
Verpakkingseenheid	1

Electrical data | Supply

Operating voltage AC max.	60 V
Operating voltage DC max.	60 V
Operating voltage AC (UL-listed)	30 V
Operating voltage DC (UL-listed)	30 V
Current operating per contact max.	4 A

Installation | Connection

Tightening torque	0,6 Nm
Mounting set	M12 x 1

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed
Pollution Degree	3
Rated surge voltage	1,5 kV

Mechanical data | Material data

Color locking	black
Locking material	Plastic
Material screw connection	PA

Mechanical data | Mounting data

Mounting method	inserted, screwed, Shaking protection
-----------------	---------------------------------------

Environmental characteristics | Climatic

Operating temperature min.	-25 °C
Operating temperature max.	85 °C