

A10 Bulkhead mounted h., IP65

Single locking lever m., p-cover


A10  
Bulkhead mounted housing  
Single locking lever  
IP65  
Technical data will be only guaranteed with Murrelektronik components.

Link naar het product

Afbeelding



Product van afwijken van afbeelding

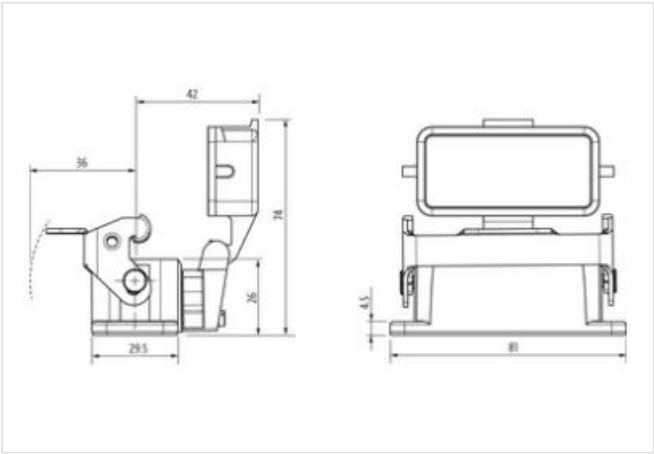

Commerciële gegevens

|                      |               |
|----------------------|---------------|
| ECLASS-6.0           | 27143424      |
| ECLASS-6.1           | 27261203      |
| ECLASS-7.0           | 27440202      |
| ECLASS-8.0           | 27440202      |
| ECLASS-9.0           | 27440202      |
| ECLASS-10.1          | 27440202      |
| ECLASS-11.1          | 27440202      |
| ECLASS-12.0          | 27440202      |
| ETIM-5.0             | EC000437      |
| Douane tarief nummer | 85389099      |
| GTIN                 | 4048879643047 |
| Verpakkingseenheid   | 1             |

Installation | Connection

|                    |     |
|--------------------|-----|
| Mating cycles min. | 500 |
|--------------------|-----|

Device protection | Electrical

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Degree of protection (EN IEC 60529)    | IP65                                    |
| Additional condition protection degree | inserted, locked, with screw connection |

Mechanical data

|              |                          |
|--------------|--------------------------|
| Housing type | Bulkhead mounted housing |
|--------------|--------------------------|

Mechanical data | Material data

|                 |               |
|-----------------|---------------|
| Coating housing | powder-coated |
| Coating locking | verzinkt      |
| Material gasket | NBR           |

|                  |                      |
|------------------|----------------------|
| Material housing | Aluminum die casting |
|------------------|----------------------|

|                           |         |
|---------------------------|---------|
| Material protective cover | Plastic |
|---------------------------|---------|

|                  |       |
|------------------|-------|
| Locking material | Steel |
|------------------|-------|

**Mechanical data | Mounting data**

|      |     |
|------|-----|
| Size | A10 |
|------|-----|

|        |       |
|--------|-------|
| Height | 26 mm |
|--------|-------|

|       |         |
|-------|---------|
| Width | 29,5 mm |
|-------|---------|

|       |       |
|-------|-------|
| Depth | 81 mm |
|-------|-------|

|                    |                      |
|--------------------|----------------------|
| Looking techniques | Single locking lever |
|--------------------|----------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
|----------------------------|--------|

|                            |        |
|----------------------------|--------|
| Operating temperature max. | 100 °C |
|----------------------------|--------|

|                                    |           |
|------------------------------------|-----------|
| Climatic category (EN IEC 60068-1) | 40/100/21 |
|------------------------------------|-----------|