


B10 Coupling h., high profile, IP65

Double locking lever m., top entry M25

B10  
Coupling housing (high)  
Double locking lever  
IP65  
Technical data will be only guaranteed with Murrelektronik components.

Link naar het product

Afbeelding

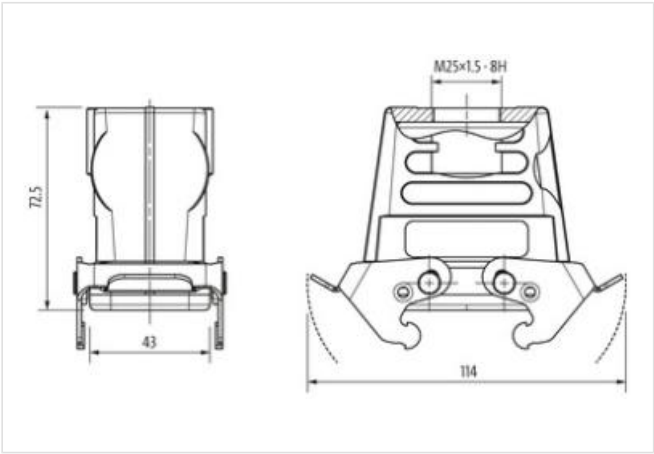

Product van afwijken van afbeelding

| Commerciële gegevens                   |                                         |
|----------------------------------------|-----------------------------------------|
| ECLASS-6.0                             | 27143424                                |
| ECLASS-6.1                             | 27261203                                |
| ECLASS-7.0                             | 27440202                                |
| ECLASS-8.0                             | 27440202                                |
| ECLASS-9.0                             | 27440202                                |
| ECLASS-10.1                            | 27440202                                |
| ECLASS-11.1                            | 27440202                                |
| ECLASS-12.0                            | 27440202                                |
| ETIM-5.0                               | EC000437                                |
| Douane tarief nummer                   | 85389099                                |
| GTIN                                   | 4048879644983                           |
| Verpakkingseenheid                     | 1                                       |
| Installation                           |                                         |
| Cable outlet                           | straight                                |
| Installation   Connection              |                                         |
| Mounting set                           | M25                                     |
| Mating cycles min.                     | 500                                     |
| Device protection   Electrical         |                                         |
| Degree of protection (EN IEC 60529)    | IP65                                    |
| Additional condition protection degree | inserted, locked, with screw connection |
| Mechanical data                        |                                         |
| Housing type                           | Coupling housing                        |
| Mechanical data   Material data        |                                         |

|                 |               |
|-----------------|---------------|
| Coating housing | powder-coated |
|-----------------|---------------|

|                 |          |
|-----------------|----------|
| Coating locking | verzinkt |
|-----------------|----------|

|                 |     |
|-----------------|-----|
| Material gasket | NBR |
|-----------------|-----|

|                  |                      |
|------------------|----------------------|
| Material housing | Aluminum die casting |
|------------------|----------------------|

|                  |       |
|------------------|-------|
| Locking material | Steel |
|------------------|-------|

**Mechanical data | Mounting data**

|      |     |
|------|-----|
| Size | B10 |
|------|-----|

|        |         |
|--------|---------|
| Height | 72,5 mm |
|--------|---------|

|       |       |
|-------|-------|
| Width | 43 mm |
|-------|-------|

|       |        |
|-------|--------|
| Depth | 114 mm |
|-------|--------|

|                    |                      |
|--------------------|----------------------|
| Looking techniques | Double locking lever |
|--------------------|----------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
|----------------------------|--------|

|                            |        |
|----------------------------|--------|
| Operating temperature max. | 100 °C |
|----------------------------|--------|

|                                    |           |
|------------------------------------|-----------|
| Climatic category (EN IEC 60068-1) | 40/100/21 |
|------------------------------------|-----------|