


B10 Surface mounted h., high profile, IP65

Double locking lever m., side entry M25

B10  
Surface mounted housing (high)  
Double locking lever  
IP65  
Technical data will be only guaranteed with Murrelektronik components.

Link naar het product

Afbeelding

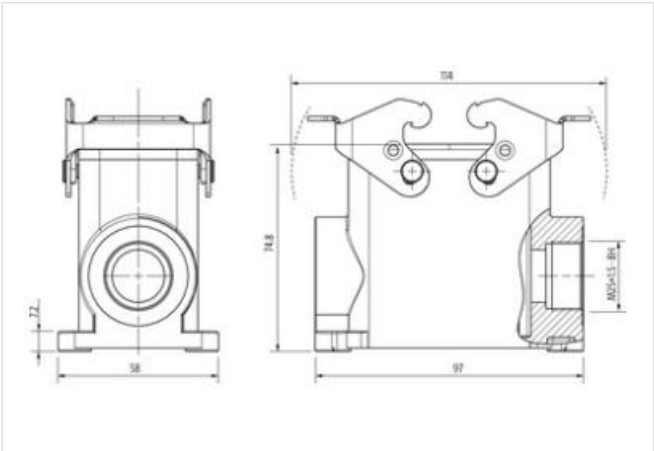

Product van afwijken van afbeelding

Commerciële gegevens

|                      |               |
|----------------------|---------------|
| ECLASS-6.0           | 27143424      |
| ECLASS-6.1           | 27261203      |
| ECLASS-7.0           | 27440202      |
| ECLASS-8.0           | 27440202      |
| ECLASS-9.0           | 27440202      |
| ECLASS-10.1          | 27440202      |
| ECLASS-11.1          | 27440202      |
| ECLASS-12.0          | 27440202      |
| ETIM-5.0             | EC000437      |
| Douane tarief nummer | 85389099      |
| GTIN                 | 4048879646239 |
| Verpakkingseenheid   | 1             |

Installation

Cable outlet laterally

Installation | Connection

|                    |     |
|--------------------|-----|
| Mounting set       | M25 |
| Mating cycles min. | 500 |

Device protection | Electrical

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Degree of protection (EN IEC 60529)    | IP65                                    |
| Additional condition protection degree | inserted, locked, with screw connection |

Mechanical data

Housing type Surface mounted housing

Mechanical data | Material data

|                  |                      |
|------------------|----------------------|
| Coating housing  | powder-coated        |
| Coating locking  | verzinkt             |
| Material gasket  | NBR                  |
| Material housing | Aluminum die casting |
| Locking material | Steel                |

**Mechanical data | Mounting data**

|                    |                      |
|--------------------|----------------------|
| Size               | B10                  |
| Height             | 74,8 mm              |
| Width              | 58 mm                |
| Depth              | 97 mm                |
| Locking techniques | Double locking lever |

**Environmental characteristics | Climatic**

|                                    |           |
|------------------------------------|-----------|
| Operating temperature min.         | -40 °C    |
| Operating temperature max.         | 100 °C    |
| Climatic category (EN IEC 60068-1) | 40/100/21 |