

B16 Surface mounted h., IP68

Screw locking, side entry M40


B16  
Surface mounted housing  
Screw locking  
IP68  
Technical data will be only guaranteed with Murrelektronik components.

Link naar het product

Afbeelding



Product van afwijken van afbeelding

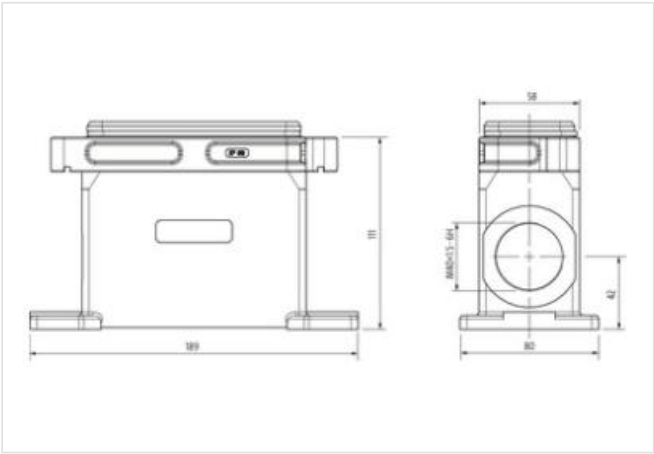

Commerciële gegevens

|                      |               |
|----------------------|---------------|
| ECLASS-6.0           | 27143424      |
| ECLASS-6.1           | 27261203      |
| ECLASS-7.0           | 27440202      |
| ECLASS-8.0           | 27440202      |
| ECLASS-9.0           | 27440202      |
| ECLASS-10.1          | 27440202      |
| ECLASS-11.1          | 27440202      |
| ECLASS-12.0          | 27440202      |
| ETIM-5.0             | EC000437      |
| Douane tarief nummer | 85389099      |
| GTIN                 | 4048879647410 |
| Verpakkingseenheid   | 1             |

Installation

Cable outlet laterally

Installation | Connection

|                    |     |
|--------------------|-----|
| Mounting set       | M40 |
| Mating cycles min. | 500 |

Device protection | Electrical

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Degree of protection (EN IEC 60529)    | IP68                                    |
| Additional condition protection degree | inserted, locked, with screw connection |

Mechanical data

Housing type Surface mounted housing

Mechanical data | Material data

|                 |               |
|-----------------|---------------|
| Coating housing | powder-coated |
|-----------------|---------------|

|                 |         |
|-----------------|---------|
| Material gasket | Silicon |
|-----------------|---------|

|                  |                      |
|------------------|----------------------|
| Material housing | Aluminum die casting |
|------------------|----------------------|

|                  |                 |
|------------------|-----------------|
| Locking material | Stainless steel |
|------------------|-----------------|

**Mechanical data | Mounting data**

|      |     |
|------|-----|
| Size | B16 |
|------|-----|

|                 |               |
|-----------------|---------------|
| Mounting method | Screw locking |
|-----------------|---------------|

|        |        |
|--------|--------|
| Height | 111 mm |
|--------|--------|

|       |       |
|-------|-------|
| Width | 80 mm |
|-------|-------|

|       |        |
|-------|--------|
| Depth | 189 mm |
|-------|--------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
|----------------------------|--------|

|                            |        |
|----------------------------|--------|
| Operating temperature max. | 125 °C |
|----------------------------|--------|

|                                    |           |
|------------------------------------|-----------|
| Climatic category (EN IEC 60068-1) | 40/125/21 |
|------------------------------------|-----------|