



MVP-METALL, 4XM12, 5POLE, M23 19POL. CON.

Connector exit frontside



4-way, 5-pole  
M23 plug connection, 19-pole  
with LED for digital PNP-signals 24 V DC  
Replaces identical product (Art.No. 27530)

Link naar het product

Afbeelding

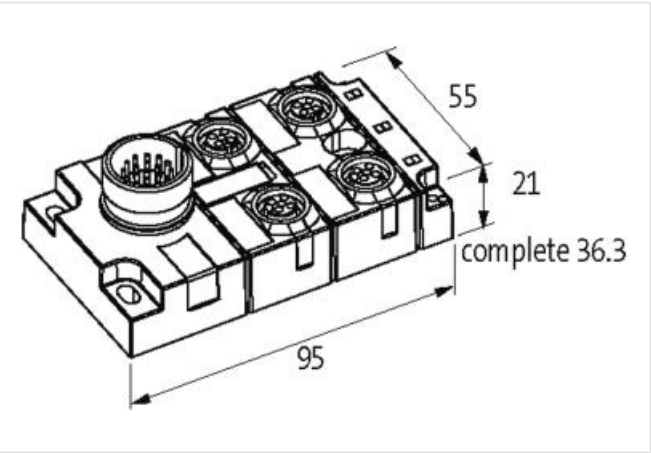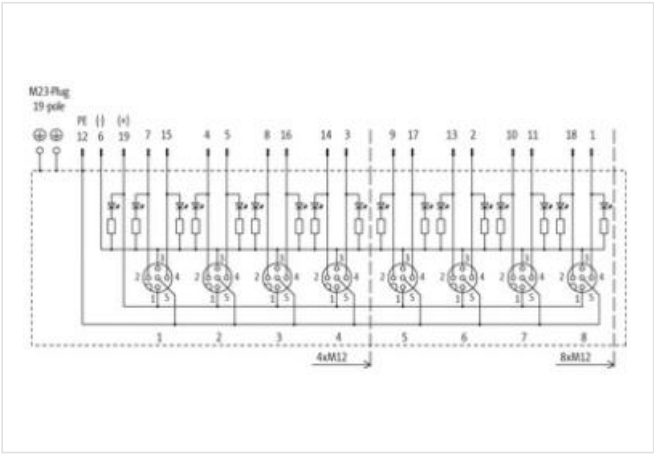

Product van afwijken van afbeelding

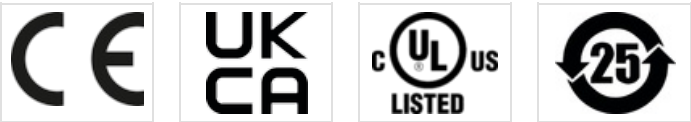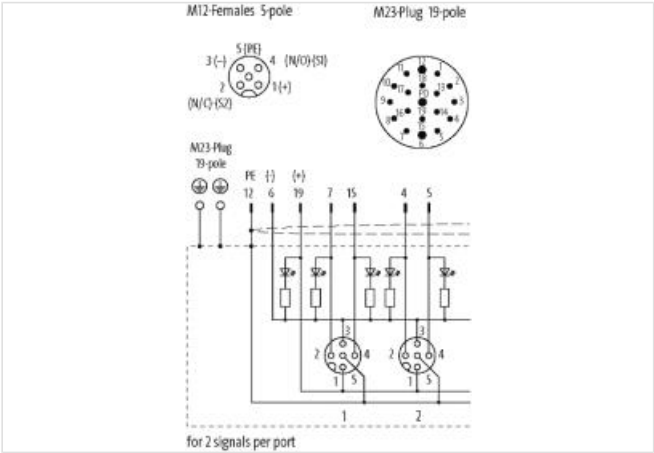

| Commerciële gegevens |          |
|----------------------|----------|
| ECLASS-6.0           | 27279219 |
| ECLASS-6.1           | 27279219 |
| ECLASS-7.0           | 27279219 |
| ECLASS-8.0           | 27279219 |
| ECLASS-9.0           | 27440108 |

|                      |               |
|----------------------|---------------|
| ECLASS-10.1          | 27440111      |
| ECLASS-11.1          | 27440111      |
| ECLASS-12.0          | 27440111      |
| ETIM-5.0             | EC002585      |
| Douane tarief nummer | 85369010      |
| GTIN                 | 4048879352857 |
| Verpakkingseenheid   | 1             |

**Electrical data | Supply**

|                                    |       |
|------------------------------------|-------|
| Operating voltage DC               | 24 V  |
| Current operating per contact max. | 4 A   |
| Total current max.                 | 7,5 A |

**Device protection | Electrical**

|                                     |                  |
|-------------------------------------|------------------|
| Degree of protection (EN IEC 60529) | IP65, IP67, IP68 |
|-------------------------------------|------------------|

**Mechanical data | Material data**

|                  |                  |
|------------------|------------------|
| Coating housing  | Nickeled         |
| Material housing | Zinc die-casting |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 90 °C  |

**Connection type 2**

|                          |         |
|--------------------------|---------|
| Family construction form | M12     |
| Gender                   | female  |
| Color contact carrier    | black   |
| Coding                   | A       |
| No. of poles             | 5       |
| PIN 1                    | +       |
| PIN 2                    | NC S 2  |
| PIN 3                    | -       |
| PIN 4                    | NO S 1  |
| PIN 5                    | PE      |
| Family construction form | M23     |
| Gender                   | male    |
| Color contact carrier    | black   |
| Coding                   | A       |
| No. of poles             | 19      |
| PIN 3                    | GY      |
| PIN 4                    | RD / BU |
| PIN 5                    | GN      |
| PIN 6                    | BU      |
| PIN 7                    | GY / PK |
| PIN 8                    | WH / GN |
| PIN 12                   | YE / GN |
| PIN 14                   | BN / GN |
| PIN 15                   | WH      |
| PIN 16                   | YE      |
| PIN 19                   | BN      |